




POWERED BY:

**PREMIER**  
premier.partners

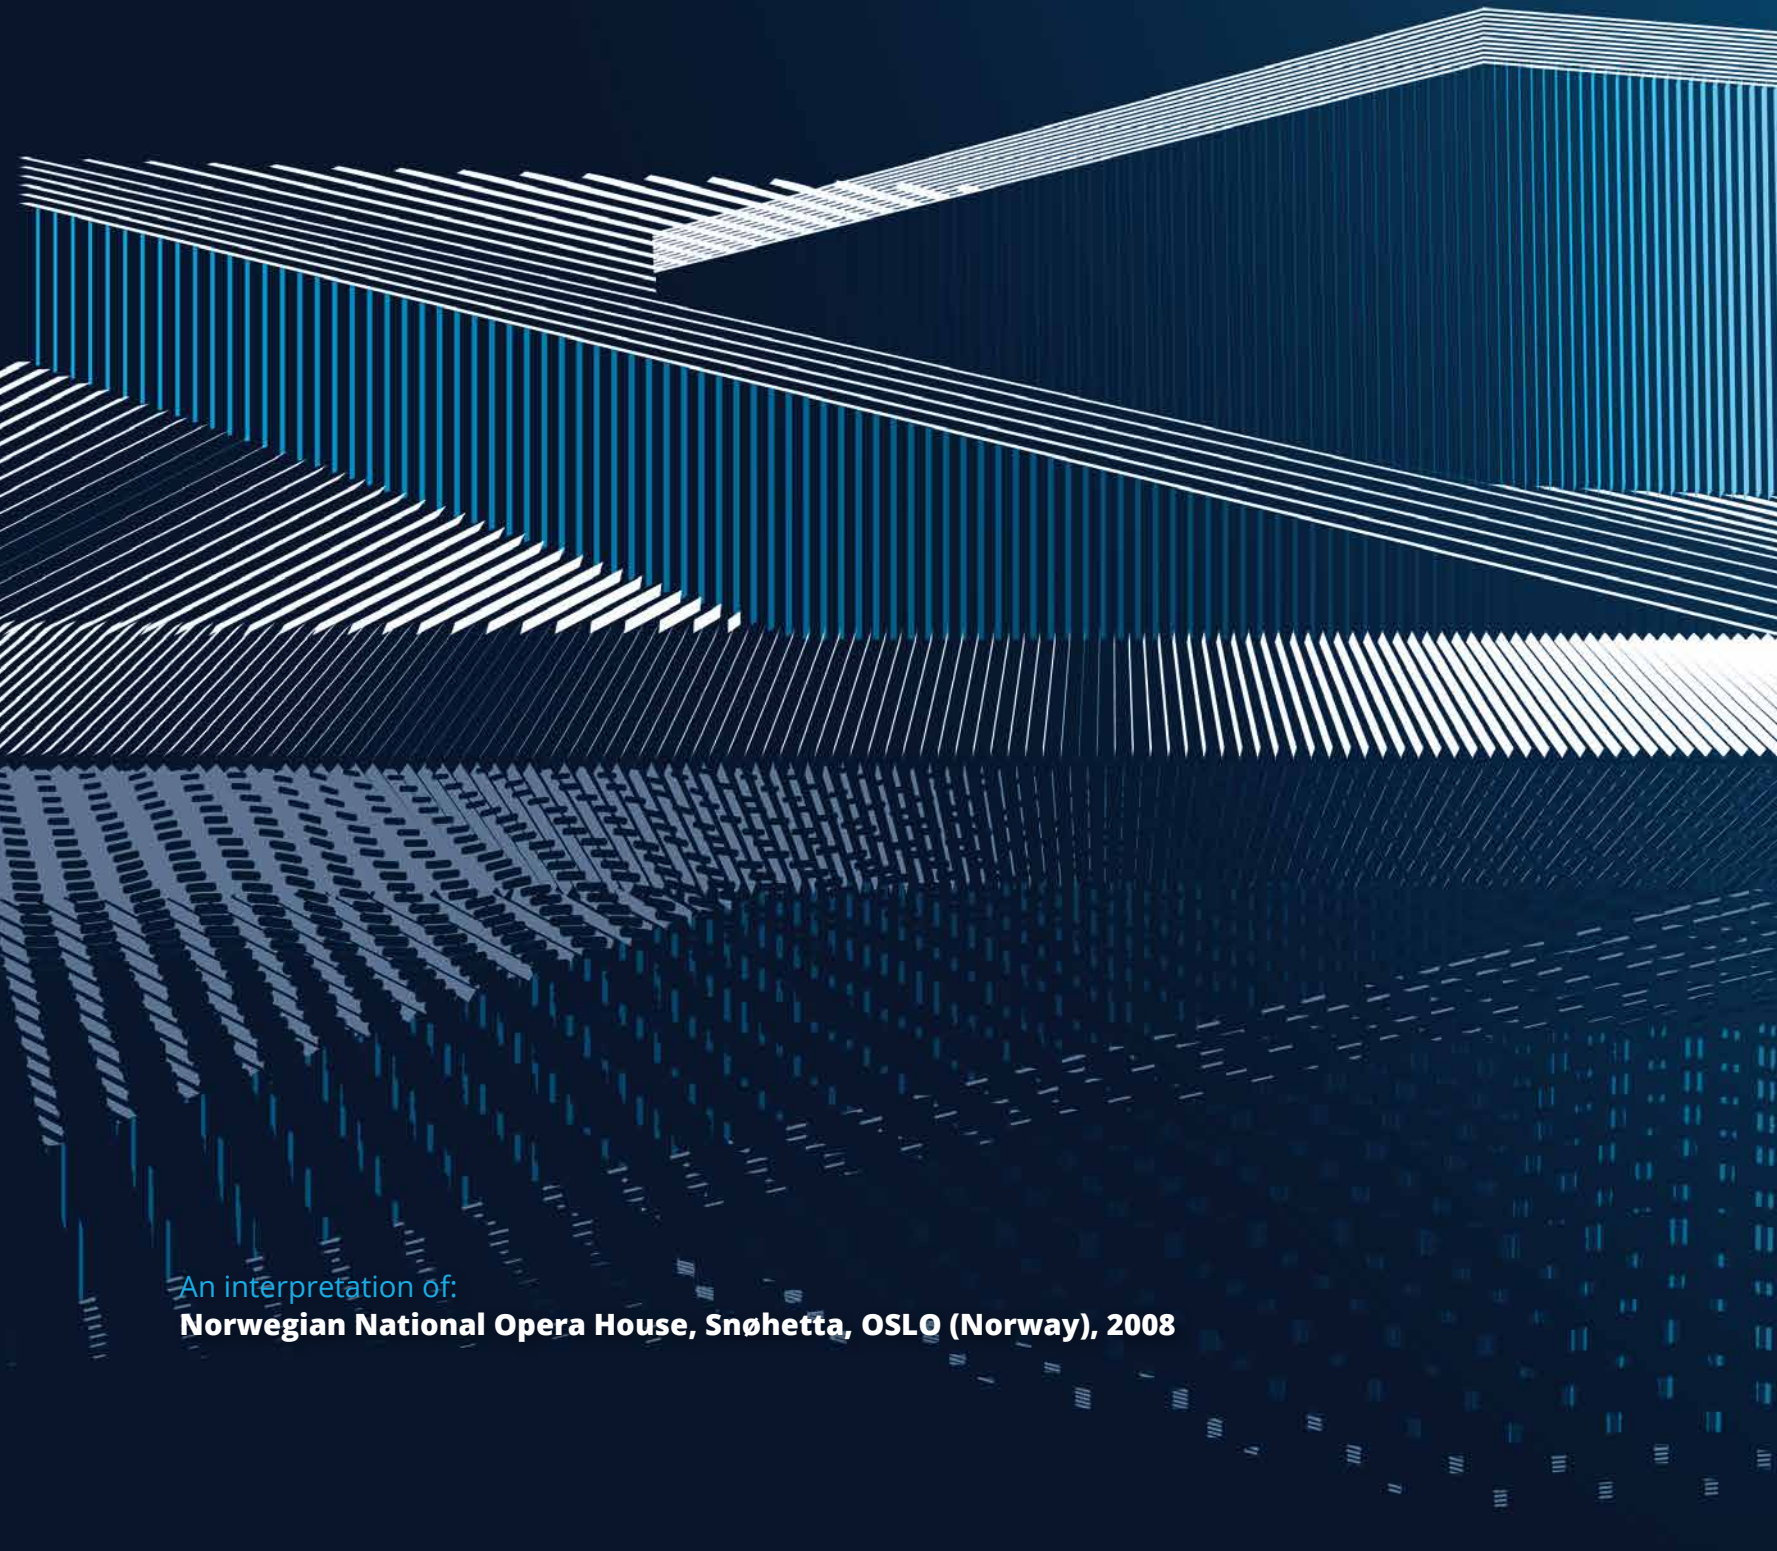

An interpretation of:  
**Norwegian National Opera House, Snøhetta, OSLO (Norway), 2008**

POWERED BY:  
**PREMIER**  
premier.partners




LOW THICKNESS

LOW THICKNESS

# PROKERLAM SQUARE

ANODIZED SILVER, POLISHED CHROME AND GOLD ALUMINIUM

PKLQ... 045  
scale 1:1



## EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose "PROKERLAM SQUARE" according to the desired finish.
2. Cut "PROKERLAM SQUARE" to the desired length and apply the adhesive on the support where the profile will be laid.
3. Press the anchoring flange of "PROKERLAM SQUARE" into the adhesive.
4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile.
5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

**PROKERLAM SQUARE** is a square corner bead profile in anodized and polished aluminium suitable to protect the external corners of coverings with low thickness. It can be used like connection profile between step tread and riser of stairs coated with ceramic and mosaic with low thickness. Its particular section and the availability in three different finishes make **PROKERLAM SQUARE** a much sought-after profile that allows a workmanlike application even with low thickness coverings.



**ANODIZED SILVER ALUMINIUM thermo packed**  
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PKLQAA 045	4,5	6,52	17,60



**POLISHED GOLD ALUMINIUM thermo packed**  
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PKLQBO 045	4,5	10,08	27,22

**POLISHED CHROME ALUMINIUM thermo packed**  
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PKLQBC 045	4,5	10,08	27,22


## COLOURS




# PROKERLAM JOLLY

ANODIZED AND POLISHED ALUMINIUM SILVER, CHROME AND GOLD

PKLJ... 045  
scale 1:1



## EXAMPLE FOR LAYING

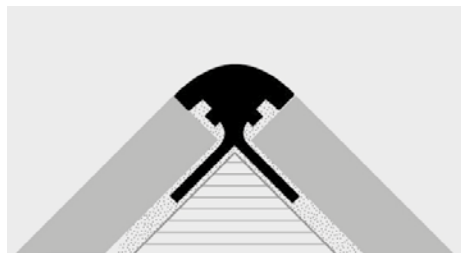

1. Choose "PROKERLAM Jolly" according to the desired finish.
2. Cut "PROKERLAM Jolly" to the desired length and apply the adhesive on the support where the profile will be laid.
3. Press the anchoring flange of "PROKERLAM Jolly" into the adhesive.
4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile.
5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

**PROKERLAM JOLLY** is a quarter-circle rounded bead profile in anodized and polished aluminium suitable to protect the external corners of coverings with low thickness. It can be used like connection profile between step tread and riser of stairs coated with ceramic and mosaic with low thickness. Its particular section and the availability in three different finishes make **PROKERLAM JOLLY** a much sought-after profile that allows a workmanlike application even with low thickness coverings.



**ANODIZED SILVER ALUMINIUM thermo packed**  
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PKLJAA 045	4,5	6,31	17,04



**POLISHED CHROME ALUMINIUM thermo packed**  
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PKLJBC 045	4,5	9,84	26,57

**POLISHED GOLD ALUMINIUM thermo packed**  
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PKLJBO 045	4,5	9,84	26,57

## COLOURS



\* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.



**PROKERLAM LINE** is a profile in polished and brushed stainless steel AISI 304/1.4301-V2A suitable to protect the external corners of coverings in low thickness. It can be used like connection profile between step tread and riser of stairs coated with ceramic and mosaic with low thickness. Its particular section and the availability in three different heights and finishes and special pieces such as internal and external corners, end caps and joints make **PROKERLAM LINE** a much sought-after profile that allows a workmanlike application even with low thickness coverings.

## PROKERLAM LINE

POLISHED AND BRUSHED STAINLESS STEEL AISI 304/1.4301-V2A



**POLISHED STAINLESS ST. AISI 304/1.4301-V2A with protective film**  
Bar lenght 2,7 lm - Pack 40 PCS - 108 lm

Article	H mm	€/lm	€/Pcs
PKLLAC 045	4,5	7,97	21,52
PKLLAC 06	6	8,21	22,17




**BRUSHED STAINLESS ST. AISI 304/1.4301-V2A with protective film**  
Bar lenght 2,7 lm - Pack 40 PCS - 108 lm

Article	H mm	€/lm	€/Pcs
PKLLACS 045	4,5	9,90	26,73
PKLLACS 06	6	10,26	27,70

### COLOURS



AC - Polished stainless steel AISI 304/1.4301-V2A ACS - Brushed stainless steel AISI 304/1.4301-V2A



### LAYING INSTRUCTIONS



1. Choose "PROKERLAM LINE" according to the desired finish. 2. Cut "PROKERLAM LINE" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROKERLAM LINE" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

LOW THICKNESS

**PROKERLAM LINE** is a Y-shaped profile in anodized and polished aluminium suitable to protect the external corners of coverings in low thickness. It can be used like connection profile between step tread and riser of stairs coated with ceramic and mosaic with low thickness. Its particular section and the availability in three different heights and finishes and special pieces such as internal and external corners, end caps and joints make **PROKERLAM LINE** a much sought-after profile that allows a workmanlike application even with low thickness coverings.

## PROKERLAM LINE

ANODIZED, VARNISHED AND STONE LINE ALUMINIUM



**ANODISED SILVER ALUMINIUM thermo packed**  
Bar lenght 2,7 lm - Pack 40 PCS - 108 lm

Article	H mm	€/lm	€/Pcs
PKLLAA 045	4,5	5,13	13,85
PKLLAA 06	6	5,44	14,69

**VARNISHED ALUMINIUM (White-Black) thermo packed**  
Bar lenght 2,7 lm - Pack 40 PCS - 108 lm

Article	H mm	€/lm	€/Pcs
PKLLA 045-01	4,5	6,21	16,77
PKLLA 045-11	4,5	6,21	16,77
PKLLA 06-01	6	6,57	17,74
PKLLA 06-11	6	6,57	17,74




**STONE LINE ALUMINIUM thermo packed**  
Bar lenght 2,7 lm - Pack 40 PCS - 108 lm

Article	H mm	€/lm	€/Pcs
PKLLA 045-SL...	4,5	8,24	22,25
PKLLA 06-SL...	6	8,73	23,57

The code of the selected colour must be added to the article code. E.g.: PKLLA 06-... (chosen colour stone cream) PKLLA 06-SL02.

### COLOURS

ANODIZED	VARNISHED	
AA - Anodized Silver Alu.	01 - White Varnished Alu.	11 - Black Varnished Alu.
STONE LINE		
SL02 - Stone cream	SL03 - Stone greywory	SL04 - Stone sand
SL05 - Stone grey	SL08 - Stone antrdark	



### LAYING INSTRUCTIONS



1. Choose "PROKERLAM LINE" according to the desired finish. 2. Cut "PROKERLAM LINE" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROKERLAM LINE" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.



LOW THICKNESS



**PROSHELL D ALL** is a profile in anodized and polished aluminum with a visible 45° sloping surface. The profile allows to connect the floor and wall coverings in ceramic and mosaic with low thickness. It is particularly suitable to ensure cleanliness and hygiene in every kind of environment where good resistance to mechanical and chemical stresses are required. Its particular section and availability in three different finishes, make **PROSHELL D ALL** a much sought after profile.

## PROSHELL D ALL

ANODIZED SILVER, POLISHED CHROME AND GOLD ALUMINIUM




**ANODIZED SILVER ALUMINIUM thermo packed**  
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PSHDAA 045	4,5	7,92	21,38




**POLISHED CHROME/GOLD ALUMINIUM thermo packed**  
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PSHDBC 045	4,5	10,08	73,49
PSHDBO 045	4,5	10,08	73,49

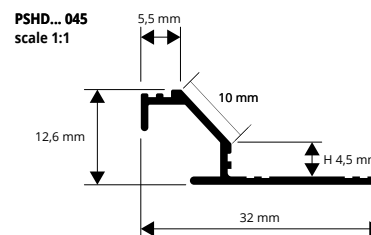

### EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

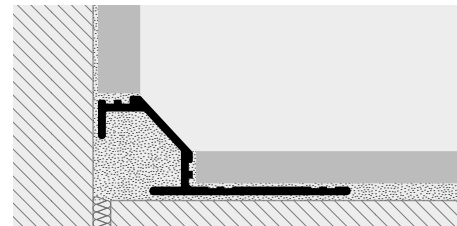

1. Choose "PROSHELL D ALL" according to the desired finish.
2. Cut "PROSHELL D ALL" to the desired length and apply the adhesive on the support where the profile will be laid.
3. Press the anchoring flange of "PROSHELL D ALL" into the adhesive.
4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile.
5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

### COLOURS



**PROSHELL R ALL** is a cove-shaped profile in anodized and polished aluminum. The profile allows to connect the floor and wall coverings in ceramic and mosaic with low thickness. It is particularly suitable to ensure cleanliness and hygiene in every kind of environment where good resistance to mechanical and chemical stresses are required. Its particular section and availability in three different finishes, make **PROSHELL R ALL** a much sought after profile.

## PROSHELL R ALL

ANODIZED SILVER, POLISHED CHROME AND GOLD ALUMINIUM




**ANODIZED SILVER ALUMINIUM thermo packed**  
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PSHRAA 045	4,5	7,92	21,38


**POLISHED CHROME/GOLD ALUMINIUM thermo packed**  
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PSHRBC 045	4,5	10,08	27,22
PSHRBO 045	4,5	10,08	27,22

### COLOURS

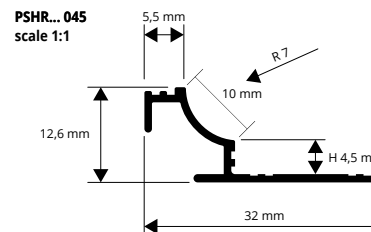

### EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

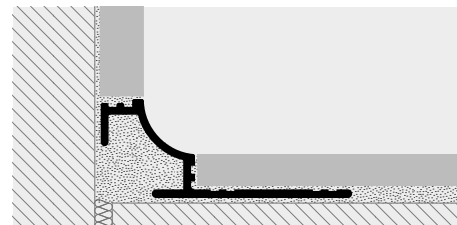

1. Choose "PROSHELL R ALL" according to the desired finish.
2. Cut "PROSHELL R ALL" to the desired length and apply the adhesive on the support where the profile will be laid.
3. Press the anchoring flange of "PROSHELL R ALL" into the adhesive.
4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile.
5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.


\* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.


# PROINTER KL ACC

STAINLESS STEEL AISI 304/1.4301-V2A

PIKL... 15  
scale 1:1



## EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

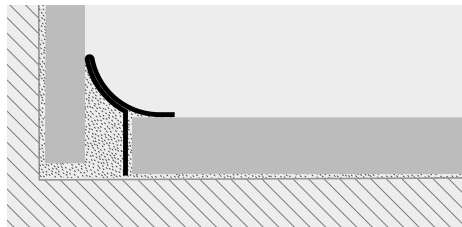

1. Choose "PROINTER KL ACC" according to the desired finish. 2. Cut "PROINTER KL ACC" to the desired length. 3. Apply the silicone along the floor-wall connection. 4. Press the arrowhead of "PROINTER KL ACC" into the silicone evenly until it is completely adherent to the floor and wall.

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS

**PROINTER KL ACC** is a cove-shaped profile in stainless steel AISI 304/1.4301-V2A. The profile allows to connect the floor and wall coverings in ceramic and mosaic also with low thickness. It is particularly suitable to ensure cleanliness and hygiene in every kind of environment where good resistance to mechanical and chemical stresses are required. Its particular section makes **PROSHELL KL ALL** a much sought after profile.



**POLISHED STAINLESS ST. AISI 304/1.4301-V2A with protective film**  
bar length 2,7 lm - pack. 40 Pcs - 108 lm - 8/10mm

Article	H mm	€/lm	€/Pc
PIKLAC 15	15	12,62	34,07

**BRUSHED STAINLESS ST. AISI 304/1.4301-V2A with protective film**  
bar length 2,7 lm - pack. 40 Pcs - 108 lm - 8/10mm

Article	H mm	€/lm	€/Pc
PIKLACS 15	15	15,94	43,04

## COLOURS



**SANDED STAINLESS ST. AISI 304/1.4301-V2A with protective film**  
bar length 2,7 lm - pack. 40 Pcs - 108 lm - 8/10mm

Article	H mm	€/lm	€/Pc
PIKLACSB 15	15	17,27	46,63

**SUPER POLISHED ST. AISI 304/1.4301-V2A with protective film**  
bar length 2,7 lm - pack. 40 Pcs - 108 lm - 8/10mm

Article	H mm	€/lm	€/Pc
PIKLACML 15	15	16,54	44,66


## AVAILABLE MINIMUM QUANTITY 100 PCS




# PROINTER KL ALL

POLISHED AND CHROMED BRASS AND ANODIZED AND POLISHED ALUMINIUM

PIKL... 045  
scale 1:1



## EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

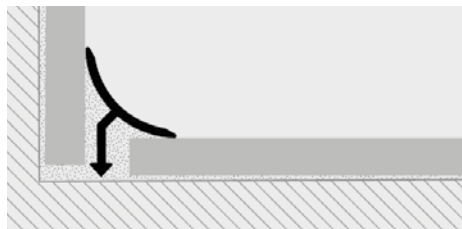

1. Choose "PROINTER KL ALL" according to the desired finish. 2. Cut "PROINTER KL ALL" to the desired length. 3. Apply the silicone along the floor-wall connection. 4. Press the arrowhead of "PROINTER KL ALL" into the silicone evenly until it is completely adherent to the floor and wall.



**POLISHED / CHROMED BRASS thermo packed**  
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PIKLLOL 045	4,5	13,85	37,40
PIKLLOC 045	4,5	21,65	58,45


## CAPS - VARNISHED PLASTIC

Article	€/Pack. 2 Pcs	€/Pack. 10 Pcs
TPIKL .../...	3,12	15,55



\* End caps of the on demand profiles are also on demand.

## COLOURS



**POLISHED CHROME ALUMINIUM / GOLD thermo packed**  
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PIKLBC 045	4,5	8,03	21,68
PIKLBO 045	4,5	8,03	21,68

**ANODIZED SILVER ALUMINIUM thermo packed**  
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PIKLAA 045	4,5	5,63	15,20

## CAPS - VARNISHED PLASTIC

Article	€/Pack. 2 Pcs	€/Pack. 10 Pcs
TPIKL .../...	3,12	15,55



## COLOURS



\* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.



**PROSTYLE KL 10** is a step protecting profile, technical and very elegant, used to keep the step made of thin ceramic tiles and kerlite/laminam non-skid and non-slip. Product in anodized aluminium with the angle portion crimped in order to increase its adhesion. Internal height 4.5 mm. It is compulsory in public buildings to comply with accident-prevention regulations.

## PROSTYLE KL 10

ANODIZED SILVER ALUMINIUM



**ANODIZED SILVER ALUMINIUM**  
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PSYKLAA 1045	4,5	8,37	22,60

### COLOURS




AA - Anodized silver aluminium

**CAPS** - pack. 2 Pcs (1 R and 1 L)

Article	H mm	€/Pack.
TPSYKLAA 1045/1	4,5	3,12


Articles not for sale singly

PSYKLAA 1045  
scale 1:1



1. Cut "PROSTYLE KL 10" to the desired length. 2. Lay the tiles on the step rise and apply the adhesive on the step tread where the profile will be laid. 3. Lay the profile on the step tread aligning it with the tiles of the step rise. 4. Apply the adhesive on the step tread and lay the tiles, aligning them with the profile. Remove immediately all the remains of adhesive from the surface of the profile. 5. Grout the joints between the tile and the profile, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

### EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

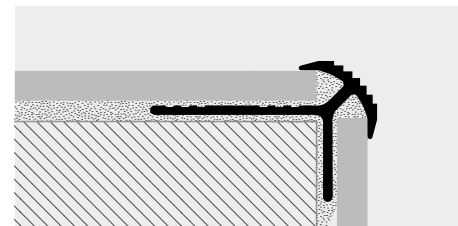

**PROSTAIR KL 20** is a step protecting profile, technical and very elegant, used to keep the step made of thin ceramic tiles and kerlite/laminam non-skid and non-slip. Product in anodized aluminium with the upper portion crimped in order to increase its adhesion and a lower vertical tab created to cover the riser of the step. It is compulsory in public buildings to comply with accident-prevention regulations. Available height H 4.5 mm.

## PROSTAIR KL 20

ANODIZED SILVER ALUMINIUM

**ANODIZED SILVER ALUMINIUM**  
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PTRKLAA 2045	4,5	6,97	18,82


### COLOURS



AA - Anodized silver aluminium



PTRKLAA 2045  
scale 1:1

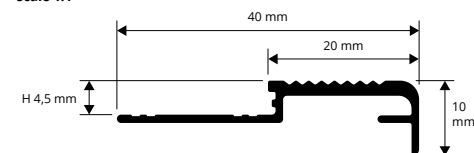

1. Cut "PROSTAIR KL 20" to the desired length. 2. Lay the tiles on the step rise and apply the adhesive on the step tread where the profile will be laid. 3. Fill the cavities on back of the profile with adhesive and lay it on the step tread aligning it with the tiles of the step rise. 4. Apply the adhesive on the step tread and lay the tiles, aligning them with the profile. Remove immediately all the remains of adhesive from the surface of the profile. 5. Grout the joints between the tile and the profile, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

### EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

