




POWERED BY:

PREMIER
premier.partners

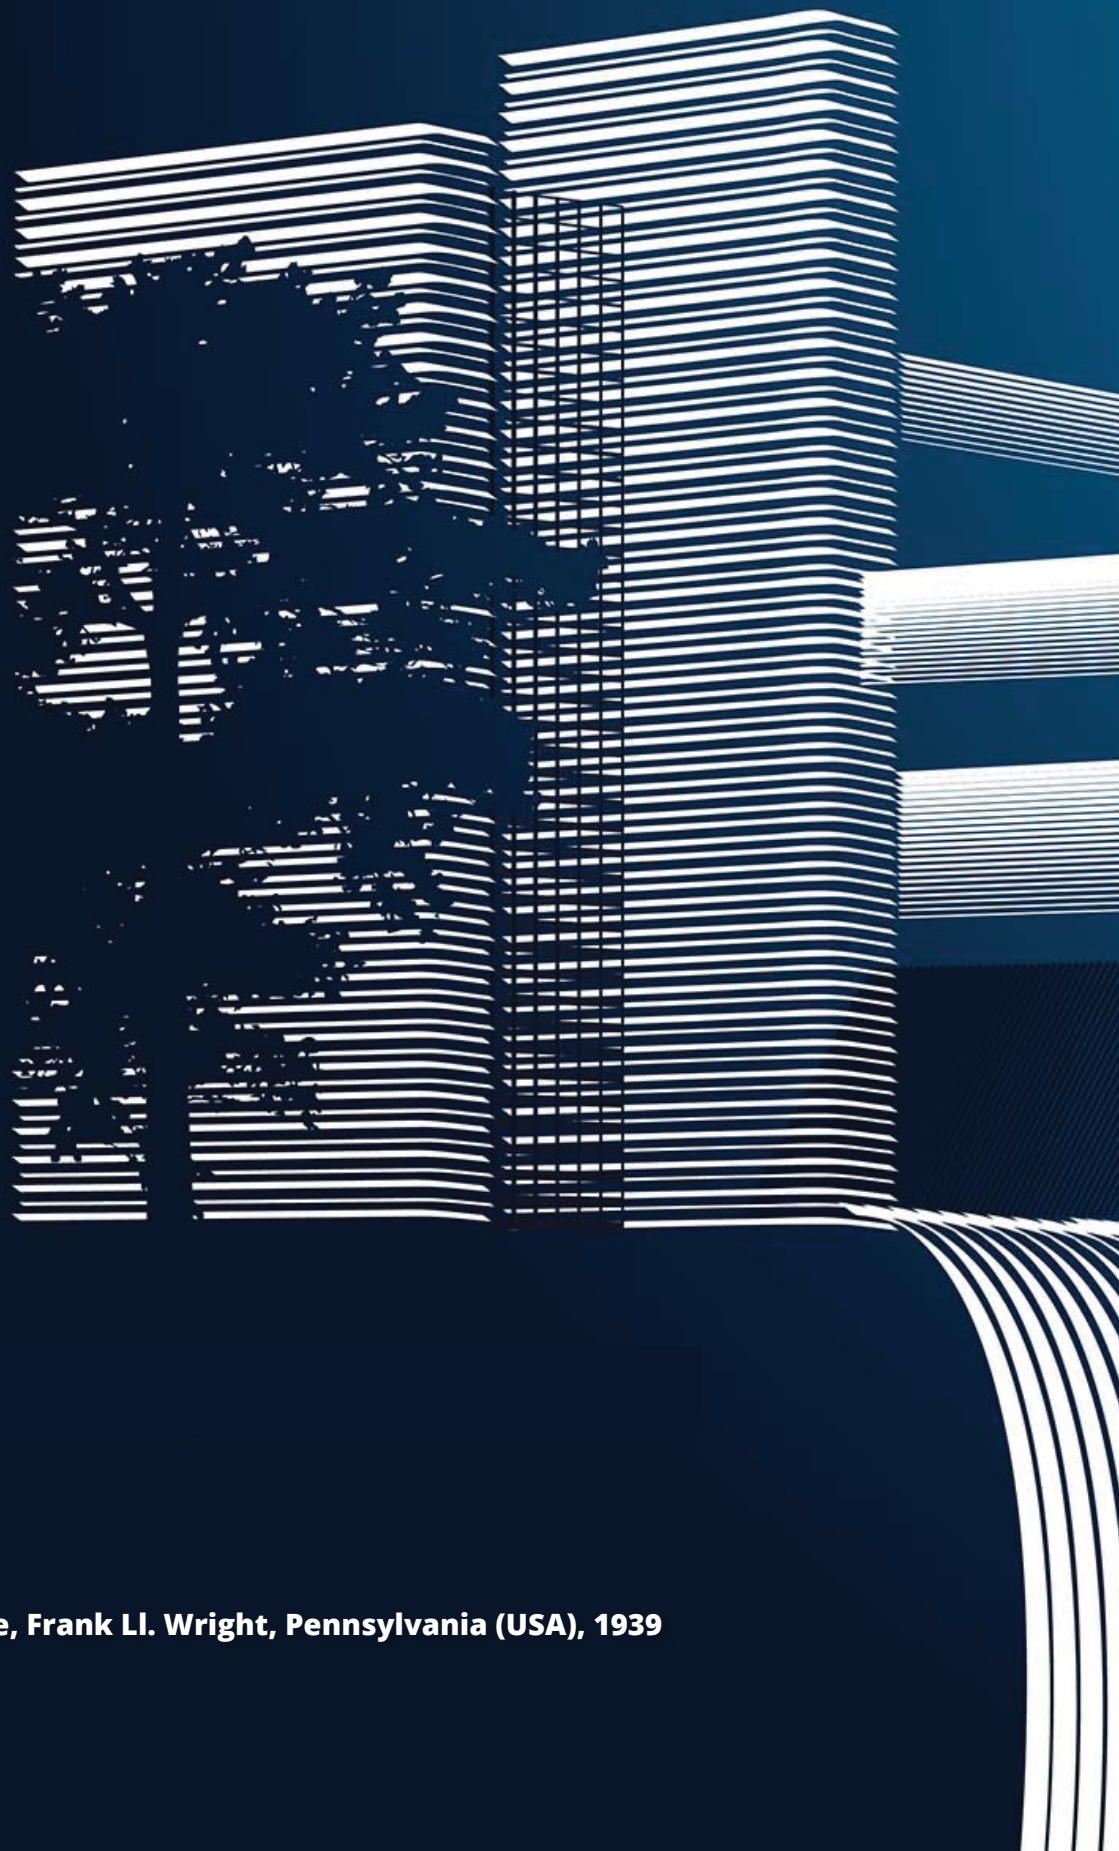


An interpretation of:

Kaufmann "Fallingwater" House, Frank L.I. Wright, Pennsylvania (USA), 1939

POWERED BY:
PREMIER
premier.partners



SHOWER AND DRAINAGE SYSTEMS

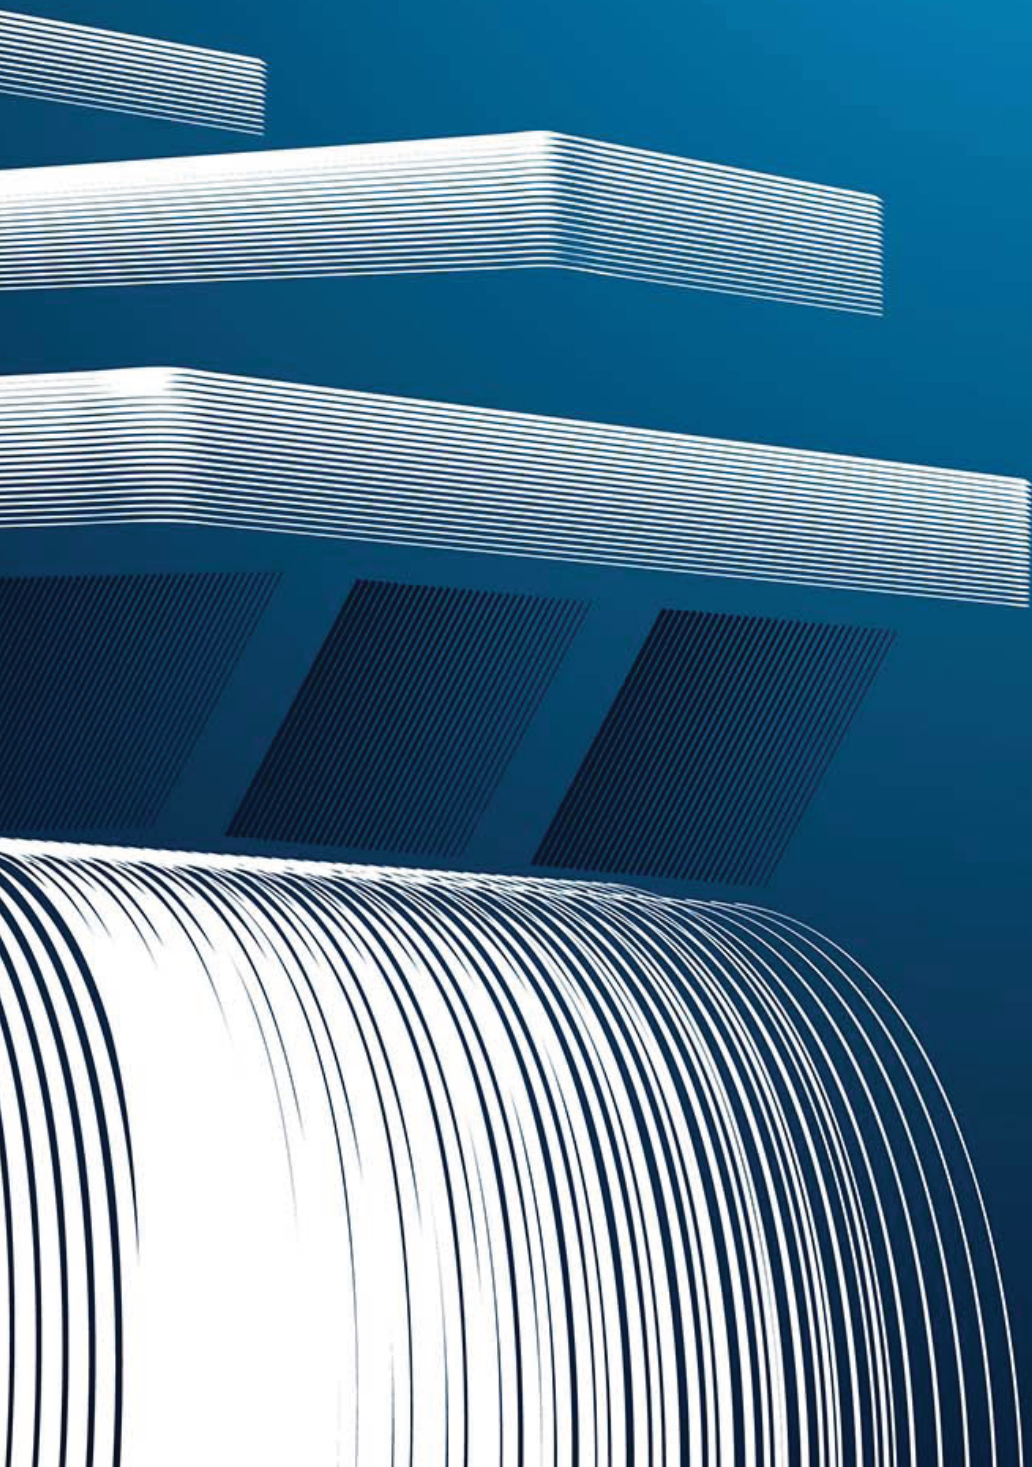

PROSHOWER LINEAR KIT SYSTEM

PROSHOWER LINEAR KIT SYSTEM is an innovative solution, which combines functionality and design to answer to all requirements of the shower.



Article	Description	Pc/Pack.	€/Pc
PSHPANEK	PROSHOWER LINEAR KIT BASE	1	428,66

Article	Kit components	Pc/Pack.
PSHPAN...	PROSHOWER PANEL in moulded polystyrene 120x120 cm with glued Profoil	1
PRBFXB	PROBAND FIX white	2
PRBPE 1507	ROLL PROBAND 150 - 7,5 lm	1
PFLO 0405	PROFOIL ROLL - 5 lm	1
PIAA 40212	ALUMINUM PROFILES (screed leveling profile) length 120 cm	2
PRSPD 10	PVC TOWEL	1



PROSHOWER PANEL LINEAR
PSHPAN



PROFOIL
PFLO 0405



PROBAND 150
PRBPE 1507



PROBAND FIX
PRBFXB




PVC TOWEL
PRSPD 10




ALUMINUM PROFILES
PIAA 40212


PROSHOWER PANEL EXTENSION
EXAMPLES OF LAYING

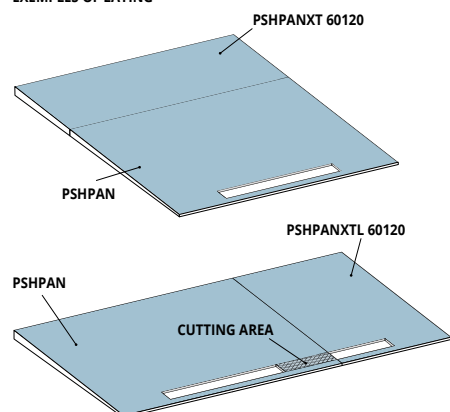

Article	Description	Pc/Pack.	€/Pc
PSHPAN	Proshower panel in moulded polystyrene 120x120 cm with glued Profoil	1	223,25



Article	Description	Pc/Pack.	€/Pc
PSHPANXT 60120	PROSHOWER PANEL EXTENSION 120x60 cm for PROSHOWER PANEL LINEAR - Slope 2%	1	111,63
PSHPANXTL 60120	LATERAL PROSHOWER PANEL EXTENSION 60x120 cm for PROSHOWER PANEL LINEAR - Slope 2%	1	111,63

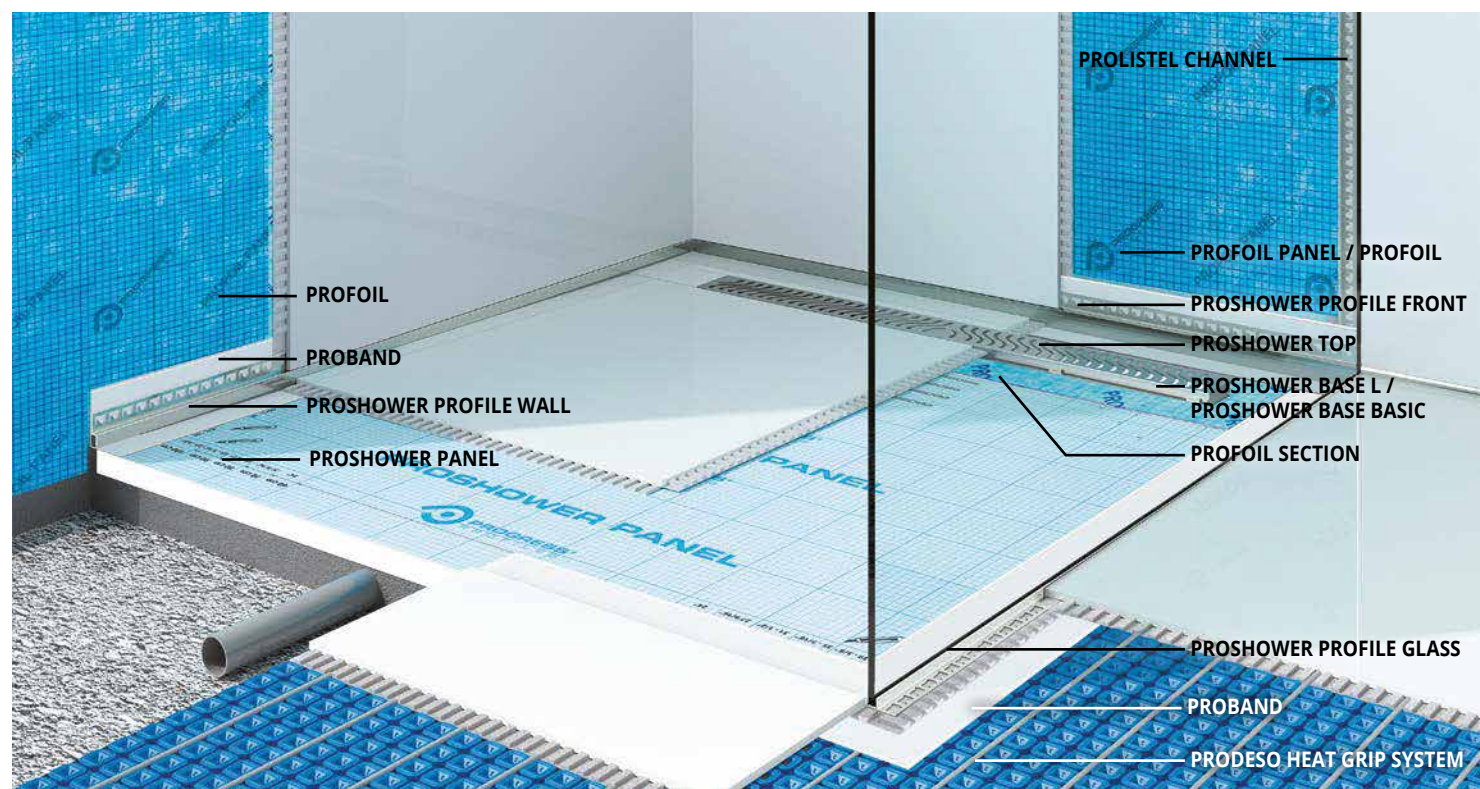

© 2022 All rights reserved by Progress Profiles. Printed in Italy

PROSHOWER BASE L is a channel body in stainless steel AISI 304/1.4301 – V2A steel for the realisation of floor-level shower. The body channel, with an overall height of 85 mm, is completed by 6 different grids in stainless steel. **PROSHOWER BASE L** undergoes electro-polishing and subsequent passivation, which guarantees excellent resistance in any environment. Its low thickness combined with the fully adjustable siphon, the modularity and the high number of grids make it a much sought-after solution.

PROSHOWER BASE L

SUPER POLISHED STAINLESS STEEL
AISI 304/1.4301-V2A





* L 30 cm

DUCT BODY MADE OF AISI 304 STAINLESS STEEL

Article	Description	Pc/Pack.	€/Pc
PSHWDL 30	PROSHOWER BASE L-ACC-L 30 x 8 cm	1	317,15
PSHWDL 70	PROSHOWER BASE L-ACC-L 70 x 8 cm	1	404,21
PSHWDL 80	PROSHOWER BASE L-ACC-L 80 x 8 cm	1	429,08
PSHWDL 90	PROSHOWER BASE L-ACC-L 90 x 8 cm	1	453,96
PSHWDL 100	PROSHOWER BASE L-ACC-L 100 x 8 cm	1	478,83
PSHWDL 120	PROSHOWER BASE L-ACC-L 120 x 8 cm	1	541,02

PSHWDL 30 / 70 / 80 / 90 / 100 / 120

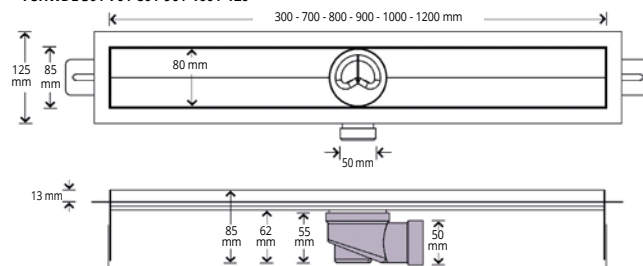

UPON REQUEST

PROSHOWER BASE L with vertical siphon complete of installed Profoil membrane (code ref. PSHWDVS...). Drain Ø 50 mm.

PROSHOWER BASE BASIC is a water collecting duct system in polypropylene for floor showers, available in several lengths and grids.

PROSHOWER BASE BASIC



GREY POLYPROPYLENE



GREY POLYPROPYLENE DUCT BODY

Article	Description	Pc/Pack.	€/Pc
PSHWBB 60	PROSHOWER BASE BASIC - 60 x 8 cm PP	1	186,55
PSHWBB 70	PROSHOWER BASE BASIC - 70 x 8 cm PP	1	199,00
PSHWBB 80	PROSHOWER BASE BASIC - 80 x 8 cm PP	1	211,43
PSHWBB 90	PROSHOWER BASE BASIC - 90 x 8 cm PP	1	223,87

PSHWBB 60 / 70 / 80 / 90

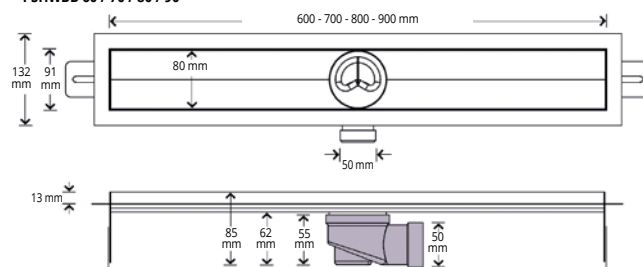

UPON REQUEST


PROSHOWER BASE BASIC with vertical siphon complete of installed Profoil membrane (code ref. PSHWBBVS...). Drain Ø 50 mm.

PROFOIL SECTION

HDPE E PP GUAINA

PROFOIL SECTION AND DOUBLE SIDED TAPE 3 lm

Article	L	Pc/Pack.	€/Pc
PSHANT 30	30 cm	1	18,66
PSHANT 60	60 cm	1	21,15
PSHANT 70	70 cm	1	23,64
PSHANT 80	80 cm	1	28,60
PSHANT 90	90 cm	1	33,58
PSHANT 100	100 cm	1	38,56
PSHANT 120	120 cm	1	44,77

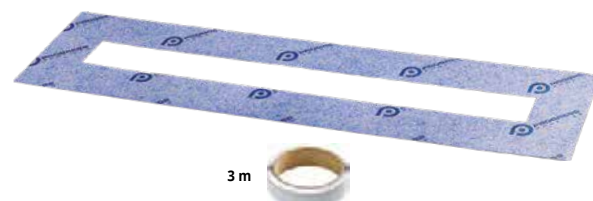

PROFOIL SECTION AND DOUBLE SIDED TAPE

PROSHOWER TOP

SUPER-POLISHED STAINLESS STEEL AISI 304 / 1.4301 - V2A

PROSHOWER TILE - tileable

PSHWT 30/60/70/80/90/100/120



PROSHOWER LINE

PSHWL 60/70/80/90/100/120




PROSHOWER DESIGN

PSHWD 30/60/70/80/90/100/120



PROSHOWER STRIPS

PSHWST 60/70/80/90/100/120

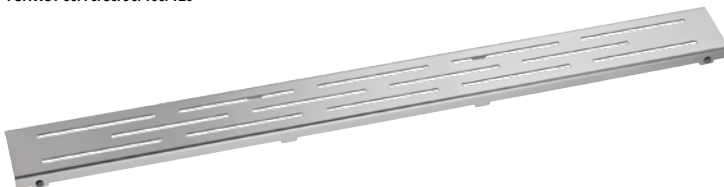

PROSHOWER GRILL

PSHWGR 60/70/80/90/100/120



PROSHOWER SQUARE

PSHWSQ 60/70/80/90/100/120



PROSHOWER TILE - SUPER-POLISHED STAINLESS STEEL AISI 304 / 1.4301 - V2A - Pack. 1 Pc

Article	Lenght cm	Width cm	€/Pc
PSHWT 30*	30	8	130,59
PSHWT 60**	60	8	149,25
PSHWT 70	70	8	155,46
PSHWT 80	80	8	161,68
PSHWT 90	90	8	167,91
PSHWT 100*	100	8	186,55
PSHWT 120*	120	8	205,21

*PSHWT 30,100,120 Provided only combined with Proshower Base L.

**PSHWT 60 Provided only combined with Proshower Base Basic.

PROSHOWER LINE - SUPER-POLISHED STAINLESS STEEL AISI 304 / 1.4301 - V2A - Pack. 1 Pc

Article	Lenght cm	Width cm	€/Pc
PSHWL 60**	60	8	149,25
PSHWL 70	70	8	155,46
PSHWL 80	80	8	161,68
PSHWL 90	90	8	167,91
PSHWL 100*	100	8	186,55
PSHWL 120*	120	8	205,21

*PSHWL 100,120 Provided only combined with Proshower Base L.

**PSHWL 60 Provided only combined with Proshower Base Basic.

PROSHOWER DESIGN - SUPER-POLISHED STAINLESS STEEL AISI 304 / 1.4301 - V2A - Pack. 1 Pc

Article	Lenght cm	Width cm	€/Pc
PSHWD 30*	30	8	130,59
PSHWD 60**	60	8	149,25
PSHWD 70	70	8	155,46
PSHWD 80	80	8	161,68
PSHWD 90	90	8	167,91
PSHWD 100*	100	8	186,55
PSHWD 120*	120	8	205,21

*PSHWD 30,100,120 Provided only combined with Proshower Base L.

**PSHWD 60 Provided only combined with Proshower Base Basic.

PROSHOWER STRIPS - SUPER-POLISHED STAINLESS STEEL AISI 304 / 1.4301 - V2A - Pack. 1 Pc

Article	Lenght cm	Width cm	€/Pc
PSHWST 60**	60	8	149,25
PSHWST 70	70	8	155,46
PSHWST 80	80	8	161,68
PSHWST 90	90	8	167,91
PSHWST 100*	100	8	186,55
PSHWST 120*	120	8	205,21

*PSHWST 100,120 Provided only combined with Proshower Base L.

**PSHWST 60 Provided only combined with Proshower Base Basic.

PROSHOWER GRILL - SUPER-POLISHED STAINLESS STEEL AISI 304 / 1.4301 - V2A - Pack. 1 Pc

Article	Lenght cm	Width cm	€/Pc
PSHWGR 60**	60	8	149,25
PSHWGR 70	70	8	155,46
PSHWGR 80	80	8	161,68
PSHWGR 90	90	8	167,91
PSHWGR 100*	100	8	186,55
PSHWGR 120*	120	8	205,21

*PSHWGR 100,120 Provided only combined with Proshower Base L.

**PSHWGR 60 Provided only combined with Proshower Base Basic.

PROSHOWER SQUARE - SUPER-POLISHED STAINLESS STEEL AISI 304 / 1.4301 - V2A - Pack. 1 Pc

Article	Lenght cm	Width cm	€/Pc
PSHWSQ 60**	60	8	149,25
PSHWSQ 70	70	8	155,46
PSHWSQ 80	80	8	161,68
PSHWSQ 90	90	8	167,91
PSHWSQ 100*	100	8	186,55
PSHWSQ 120*	120	8	205,21

*PSHWSQ 100,120 Provided only combined with Proshower Base L.

**PSHWSQ 60 Provided only combined with Proshower Base Basic.

© 2022 All rights reserved by Progress Profiles. Printed in Italy




DRAIN REDUCTION

POLYPROPYLENE

Article	Description	Pc/Pack.	€/Pc
PSHWRD 5040	50 to 40 mm polypropylene drain reduction	1	12,44



REDUCTION

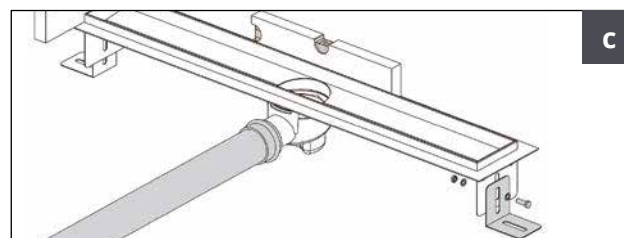
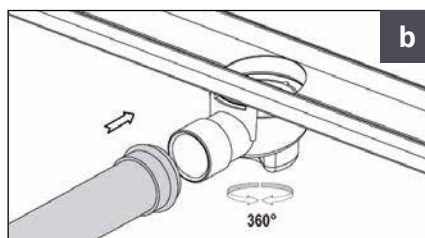



MODULAR ASSEMBLY KIT

Article	Description	Pc/Pack.	€/Pc
PSHWRD	Modular assembly kit to make drain ducts of any length	1	32,34



MODULAR ASSEMBLY KIT

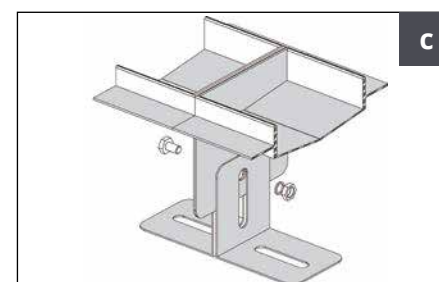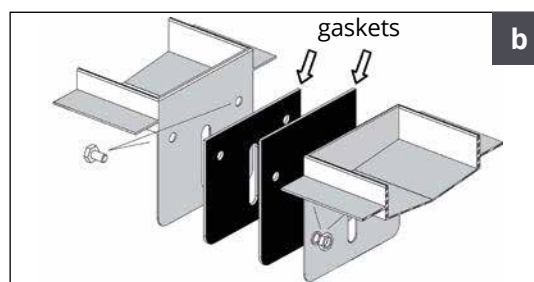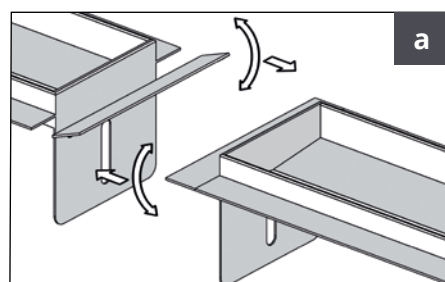

PROSHOWER BASE L PRO

SUPER-POLISHED
STAINLESS STEEL AISI 316L / 1.4404 – V4A

PROSHOWER BASE L PRO is a stainless steel AISI 316L / 1.4404 – V4A drain for the realisation of floor-level and for wall shower drain. This drain is available in different lengths and equipped with different grids. The reduced thickness grid has excellent chemical resistance and is equipped with a 360° adjustable siphon.


PSHWP...



DUCT BODY MADE OF A STAINLESS STEEL AISI 316L / 1.4404 – V4A

Article	Description	Pc/Pack.	€/Pc
PSHWP 30	PROSHOWER BASE L PRO - L 30 x 5,5 cm	1	162,75
PSHWP 60	PROSHOWER BASE L PRO - L 60 x 5,5 cm	1	178,50
PSHWP 70	PROSHOWER BASE L PRO - L 70 x 5,5 cm	1	189,00
PSHWP 80	PROSHOWER BASE L PRO - L 80 x 5,5 cm	1	199,50
PSHWP 90	PROSHOWER BASE L PRO - L 90 x 5,5 cm	1	210,00
PSHWP 100	PROSHOWER BASE L PRO - L 100 x 5,5 cm	1	220,50

Article	Kit components	Pc/Pack.
PSHWPNN...	PROSHOWER BASE L PRO DUCT BODY	1
TASPRF...	PROFOIL SECTION	1
SPSHWPT...	POLYSTYRENE TEMPORARY CHANNEL PROTECTION	1

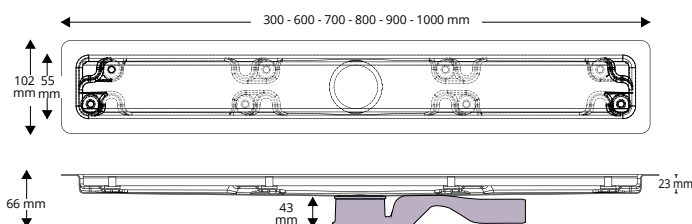

PROSHOWER BASE L PRO
DUCT BODY
PSHWPNN...



PROFOIL SECTION
TASPRF...




POLYSTYRENE TEMPORARY
CHANNEL PROTECTION
SPSHWPT...

PROSHOWER TOP PRO

SUPER-POLISHED STAINLESS STEEL AISI 316L / 1.4404 – V4A

PROSHOWER TILE/LINE PRO

PSHWPT 30/60/70/80/90/100

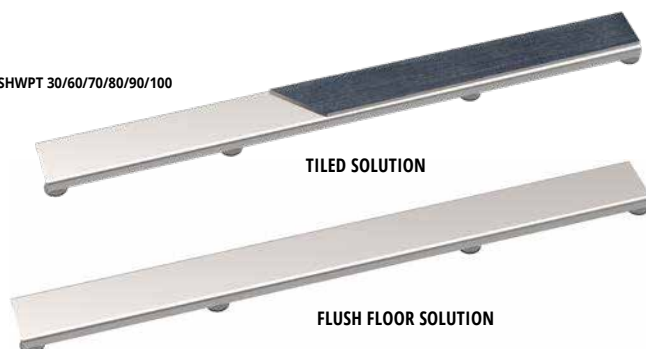

PROSHOWER TILE/LINE PRO - SUPER-POLISHED STAINLESS STEEL AISI 316L/1.4404-V4A - Pack. 1 Pc

Article	Lenght cm	Width cm	€/Pc
PSHWPLT 30	30	5,5	42,00
PSHWPLT 60	60	5,5	63,00
PSHWPLT 70	70	5,5	68,25
PSHWPLT 80	80	5,5	73,50
PSHWPLT 90	90	5,5	78,75
PSHWPLT 100	100	5,5	84,00

Sold only in combination with Proshower Base L PRO

PROSHOWER DESIGN PRO

PSHWPD 30/60/70/80/90/100



PROSHOWER DESIGN PRO - - SUPER-POLISHED STAINLESS STEEL AISI 316L/1.4404-V4A - Pack. 1 Pc







Article	Lenght cm	Width cm	€/Pc
PSHWPD 30	30	5,5	52,50
PSHWPD 60	60	5,5	73,50
PSHWPD 70	70	5,5	78,75
PSHWPD 80	80	5,5	84,00
PSHWPD 90	90	5,5	89,25
PSHWPD 100	100	5,5	94,50

Sold only in combination with Proshower Base L PRO

PROSHOWER BASE L PRO is also equipped with a wall drain box made of AISI 316L / 1.4404 - V4A stainless steel which recessed into the wall, allows to realize wall drains without compromising the water flow and the ease of cleaning.



WALL DRAIN BOX

WALL DRAIN BOX STAINLESS STEEL AISI 316L/1.4404-V4A

Article	Description	Pc/Pack.	€/Pc
 KBPSHWPAC 30	PROSHOWER BASE L PRO wall drain box 30 cm	1	136,50
 KBPSHWPAC 60	PROSHOWER BASE L PRO wall drain box 60 cm	1	162,75
 KBPSHWPAC 70	PROSHOWER BASE L PRO wall drain box 70 cm	1	173,25
 KBPSHWPAC 80	PROSHOWER BASE L PRO wall drain box 80 cm	1	183,75
 KBPSHWPAC 90	PROSHOWER BASE L PRO wall drain box 90 cm	1	220,50
 KBPSHWPAC 100	PROSHOWER BASE L PRO wall drain box 100 cm	1	231,00





INSTALLATION SECTION OF THE WALL DRAIN PROSHOWER BASE L PRO

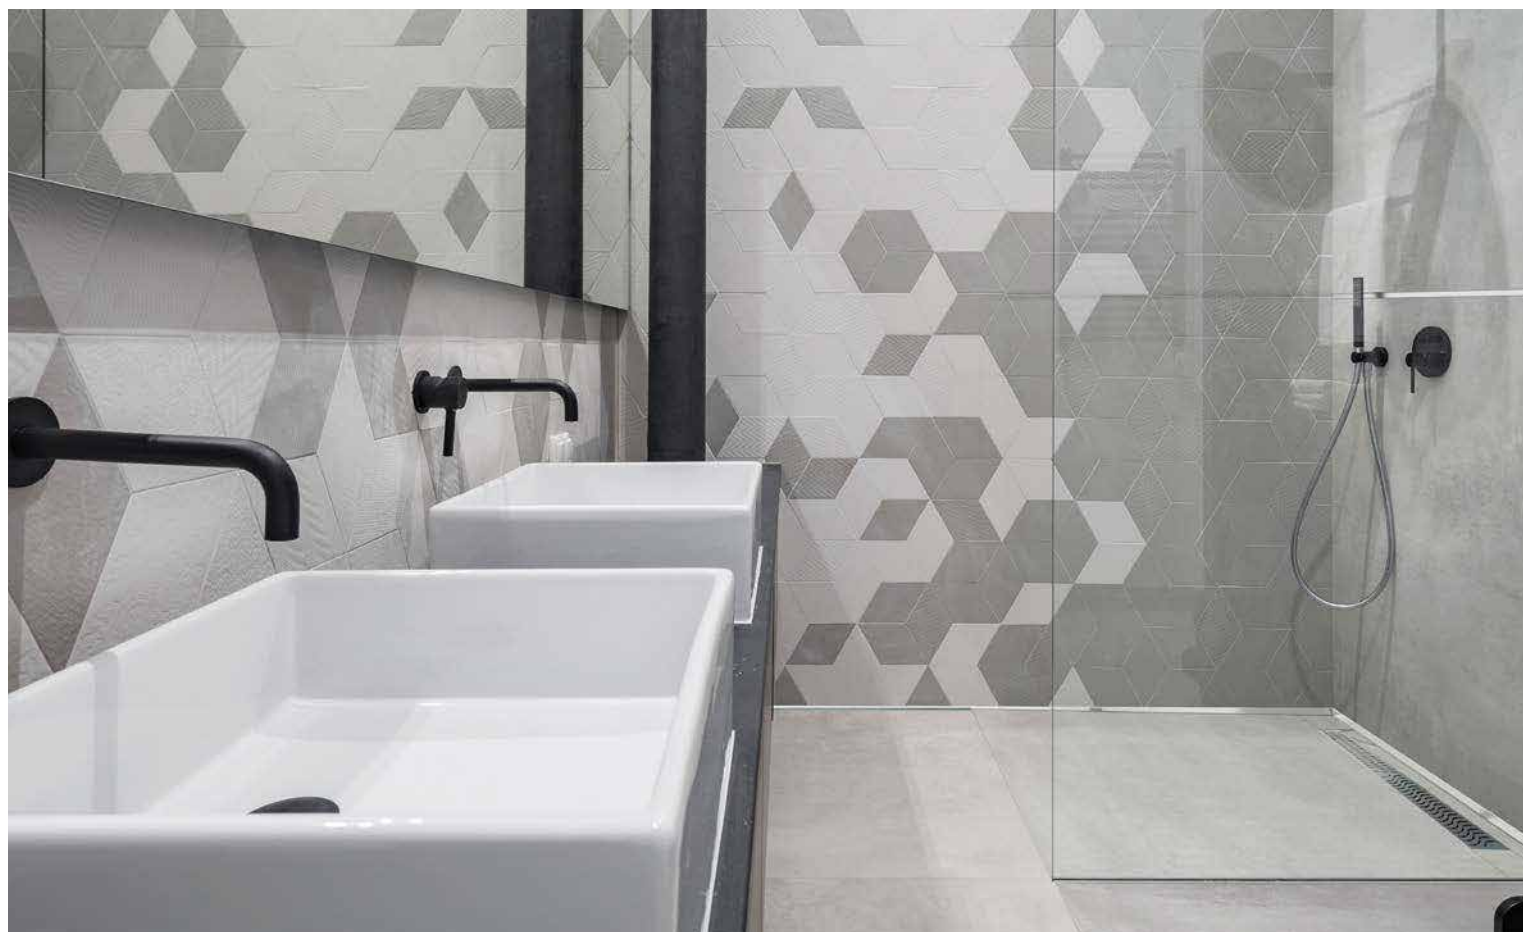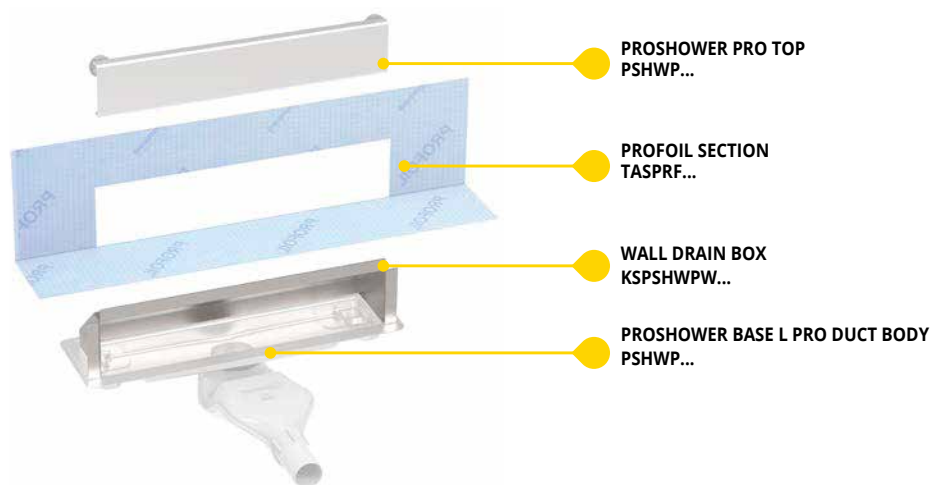

PROSHOWER PROFILE GLASS

SATINED STAINLESS STEEL AISI 304 / 1.4301 - V2A

PROSHOWER PROFILE GLASS Suitable profile for fixing glass slabs in case of floor level showers with a slope of 2%. Due to its particular shape and finish in satin-finish stainless steel AISI 304 / 1.4301 - V2A, it covers and decorates the visible side of the screed.

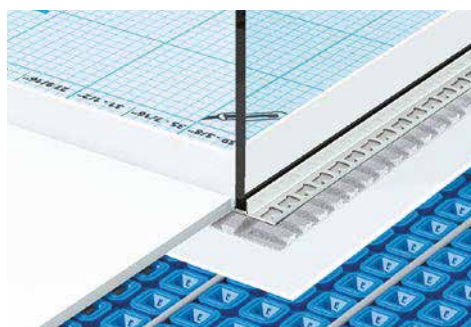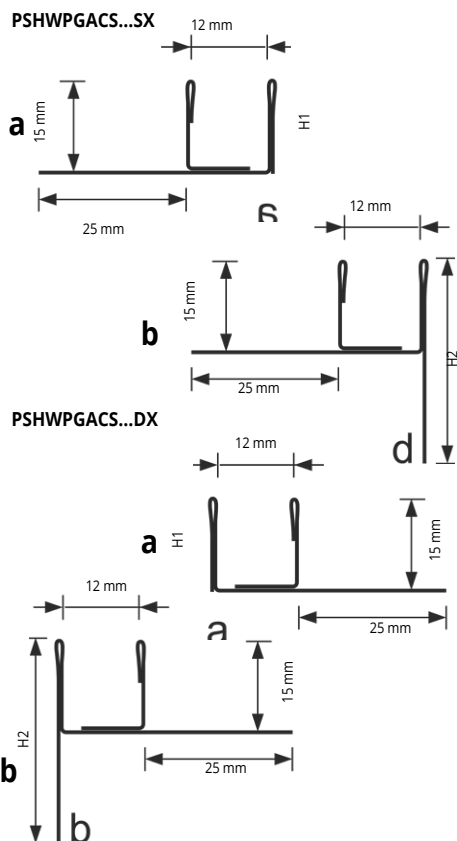


SATINED STAINLESS STEEL AISI 304/1.4301-V2A - LEFT
degreased and passivated - thermo packed - Pack. 1 Pc


Article	H1 mm	H2 mm	L cm	€/Pc
PSHWPGACS 100SX	15	33	100	113,12
PSHWPGACS 150SX	15	43	150	157,89
PSHWPGACS 200SX	15	53	200	205,15

SATINED STAINLESS STEEL AISI 304/1.4301-V2A - RIGHT
degreased and passivated - thermo packed - Pack. 1 Pc

Article	H1 mm	H2 mm	L cm	€/Pc
PSHWPGACS 100DX	15	33	100 cm	113,12
PSHWPGACS 150DX	15	43	150 cm	157,89
PSHWPGACS 200DX	15	53	200 cm	205,15



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



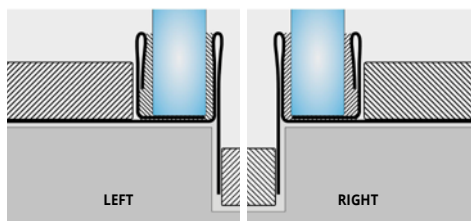


1. Choose "PROSHOWER PROFILE GLASS" according to the desired length. 2. Cut "PROSHOWER PROFILE GLASS" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROJOLLY SQUARE" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile. 6. Insert the sheet of glass and seal.


PROSHOWER PROFILE

SATINED STAINLESS STEEL AISI 304 / 1.4301 - V2A

PROSHOWER PROFILE is a profile for floor level showers in stainless steel for the protection of the floor edges and as decoration of the screed visible side. The profile has a 2% slope. Its specific shape makes it an easy to lay profile to be used with all kind of floor.

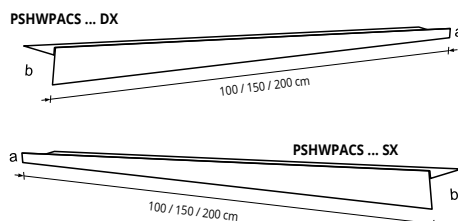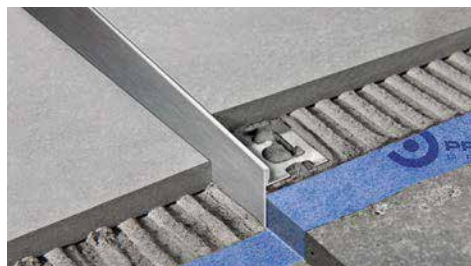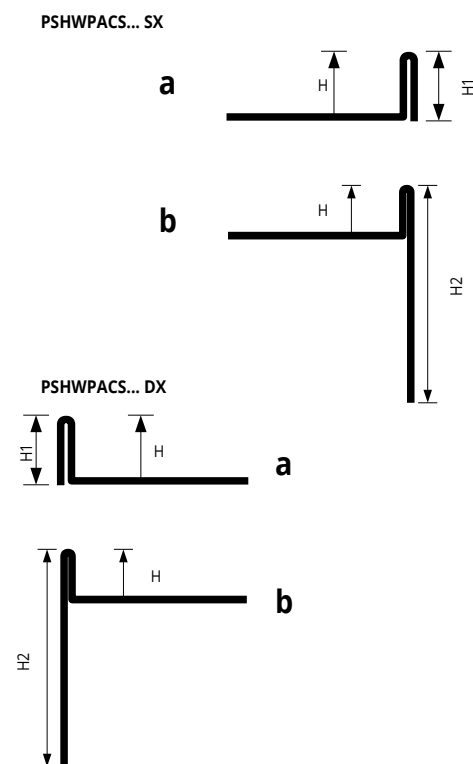

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

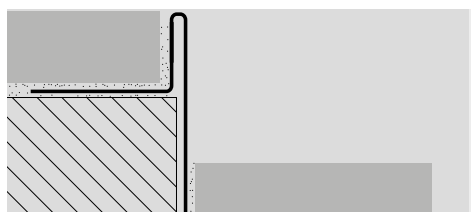

SATINED STAINLESS STEEL AISI 304/1.4301-V2A - RIGHT
degreased and passivated - thermo packed - Pack. 1 Pc

Article	H mm	H1 mm	H2 mm	L cm	€/Pc
PSHWPCAS 1010DX	10	11	28	100	75,25
PSHWPCAS 1015DX	10	11	38	150	91,42
PSHWPCAS 1020DX	10	11	48	200	111,88
PSHWPCAS 12510DX	12,5	13,5	30	100	78,98
PSHWPCAS 12515DX	12,5	13,5	40	150	95,15
PSHWPCAS 12520DX	12,5	13,5	50	200	115,61

SATINED STAINLESS STEEL AISI 304/1.4301-V2A - LEFT
degreased and passivated - thermo packed - Pack. 1 Pc

Article	H mm	H1 mm	H2 mm	L cm	€/Pc
PSHWPCAS 1010SX	10	11	28	100	75,25
PSHWPCAS 1015SX	10	11	38	150	91,42
PSHWPCAS 1020SX	10	11	48	200	111,88
PSHWPCAS 12510SX	12,5	13,5	30	100	78,98
PSHWPCAS 12515SX	12,5	13,5	40	150	95,15
PSHWPCAS 12520SX	12,5	13,5	50	200	115,61

1. Choose "PROSHOWER PROFILE" according to the desired length. 2. Cut "PROSHOWER PROFILE" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROJOLLY SQUARE" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile. 6. Insert the sheet of glass and seal.


PROSHOWER PROFILE FRONT is a satin-finish stainless steel AISI 304/1.4301-V2A profile. It is suitable to cover and decorate the visible part of wall in front of the shower tray in case of floor level showers with slope.

PROSHOWER PROFILE FRONT

SATINED STAINLESS STEEL AISI 304 / 1.4301 - V2A

SATINED STAINLESS STEEL AISI 304/1.4301-V2A
degreased and passivated - thermo packed - Pack. 1 Pc

Article	H mm	H1 mm	L cm	€/Pc
PSHWPFACS 101028	10	28	100	57,15
PSHWPFACS 101038	10	38	100	58,39
PSHWPFACS 101048	10	48	100	62,13
PSHWPFACS 101528	10	28	150	74,56
PSHWPFACS 101538	10	38	150	75,81
PSHWPFACS 101548	10	48	150	80,79
PSHWPFACS 1251028	12,5	28	100	57,15
PSHWPFACS 1251038	12,5	38	100	58,39
PSHWPFACS 1251048	12,5	48	100	62,13
PSHWPFACS 1251528	12,5	28	150	74,56
PSHWPFACS 1251538	12,5	38	150	75,81
PSHWPFACS 1251548	12,5	48	150	80,79

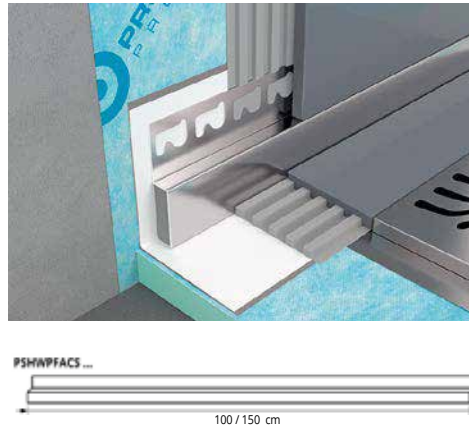


EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS




1. Choose "PROSHOWER PROFILE FRONT" according to the desired length. 2. Cut "PROSHOWER PROFILE FRONT" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROJOLLY SQUARE" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile. 6. Insert the sheet of glass and seal.

PSHWPFACS 101028 PSHWPFACS 1251028 PSHWPFACS 101038
PSHWPFACS 101528 PSHWPFACS 1251528 PSHWPFACS 101538

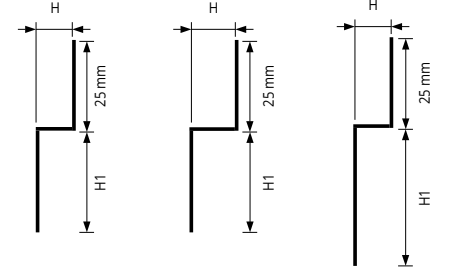

PSHWPFACS 1251038 PSHWPFACS 101048 PSHWPFACS 1251048
PSHWPFACS 1251538 PSHWPFACS 101548 PSHWPFACS 1251548

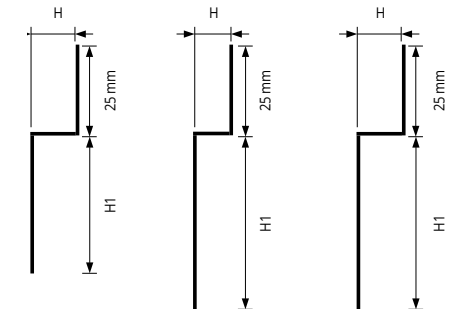

PROSHOWER PROFILE WALL Profile in satin-finish stainless steel AISI 304 / 1.4301 - V2A. It is suitable to cover and decorate the visible part of wall beside the shower tray in case of floor level showers with a slope of 2%.

PROSHOWER PROFILE WALL


SATINED STAINLESS STEEL AISI 304 / 1.4301 - V2A

SATINED STAINLESS STEEL AISI 304/1.4301-V2A - RIGHT
degreased and passivated - thermo packed - Pack. 1 Pc


Article	H mm	H1 mm	H2 mm	L cm	€/Pc
PSHWPLACS 1010DX	10	10	28	100	57,15
PSHWPLACS 1015DX	10	10	38	150	74,56
PSHWPLACS 1020DX	10	10	48	200	93,22
PSHWPLACS 12510DX	12,5	10	28	100	57,77
PSHWPLACS 12515DX	12,5	10	38	150	75,18
PSHWPLACS 12520DX	12,5	10	48	200	94,46

SATINED STAINLESS STEEL AISI 304/1.4301-V2A - LEFT
degreased and passivated - thermo packed - Pack. 1 Pc

Article	H mm	H1 mm	H2 mm	L cm	€/Pc
PSHWPLACS 1010SX	10	10	28	100	57,15
PSHWPLACS 1015SX	10	10	38	150	74,56
PSHWPLACS 1020SX	10	10	48	200	93,22
PSHWPLACS 12510SX	12,5	10	28	100	57,77
PSHWPLACS 12515SX	12,5	10	38	150	75,18
PSHWPLACS 12520SX	12,5	10	48	200	94,46

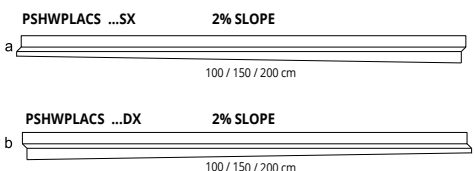


EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

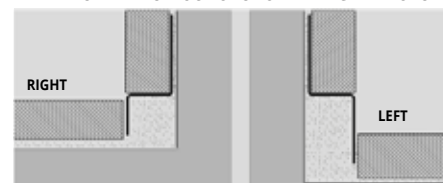


1. Choose "PROSHOWER PROFILE WALL" according to the desired length. 2. Cut "PROSHOWER PROFILE WALL" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROJOLLY SQUARE" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile. 6. Insert the sheet of glass and seal.

PSHWPLACS ...SX

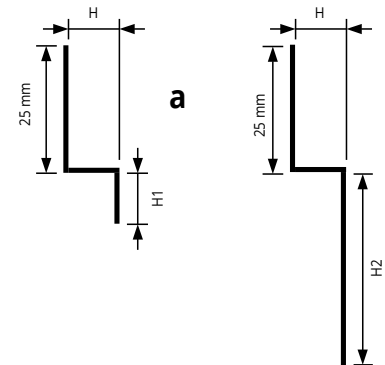


PSHWPLACS ...DX

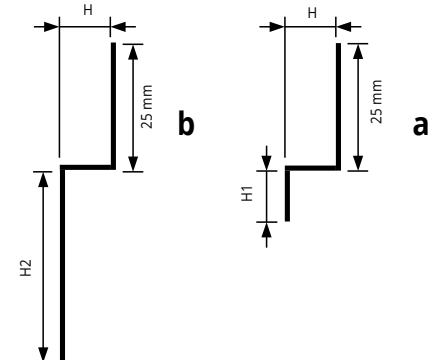


PROLISTEL CHANNEL

STAINLESS STEEL AISI 304/1.4301-V2A

PLTCH... 08 - 10 - 11 - 12,5
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

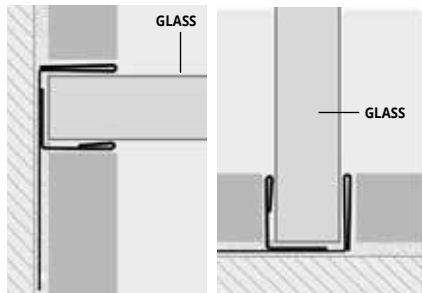


1. Choose "PROLISTEL CHANNEL" according to the visible surface and desired finish. 2. Cut "PROLISTEL CHANNEL" to the desired length and apply the adhesive on the surface where the profile will be laid. 3. Press "PROLISTEL CHANNEL" into the adhesive, aligning it with the tiles leaving a 2 mm. joint. Remove immediately all remains of adhesive from the surface of the profile. 4. Fill the joint between the profile and tiles with grout in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

COLOURS



PROLISTEL CHANNEL is a F-shaped strip in polished an satin-finish stainless steel AISI 304/1.4301-V2A suitable to decorate the wall coverings in ceramic tiles and natural stones. Its section allows the realization of a decorative joint which can also be used as a guide for the fixing of sheets of glass on floors and walls. Its particular section and the availability in two different finishes make **PROLISTEL CHANNEL** a much sought-after profile that allows an easy workmanlike application.

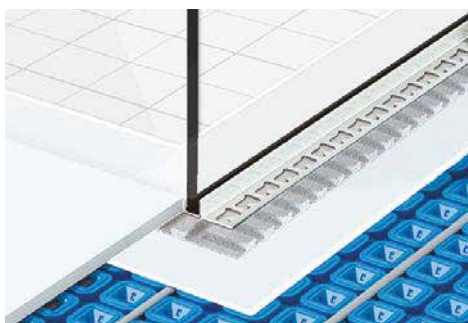

POLISHED STAINLESS STEEL AISI 304/1.4301-V2A

bar length 2,7 lm - pack. 1 Pc

Article	H mm	L mm	€/ml	€/Pc
PLTCHAC 0812	8	12	43,47	117,37
PLTCHAC 1012	10	12	45,89	123,90
PLTCHAC 1112	11	12	48,30	130,41
PLTCHAC 12512	12,5	12	50,71	136,92

POLISHED STAINLESS STEEL AISI 304/1.4301-V2A

bar length 2,7 lm - pack. 1 Pc

Article	H mm	L mm	€/ml	€/Pc
PLTCHAC 0808	8	08	43,47	117,37
PLTCHAC 1008	10	08	45,89	123,90
PLTCHAC 1108	11	08	48,30	130,41
PLTCHAC 12508	12,5	08	50,71	136,92

POLISHED STAINLESS STEEL AISI 304/1.4301-V2A

bar length 2,7 lm - pack. 1 Pc

Article	H mm	L mm	€/ml	€/Pc
PLTCHAC 0810	8	10	43,47	117,37
PLTCHAC 1010	10	10	45,89	123,90
PLTCHAC 1110	11	10	48,30	130,41
PLTCHAC 12510	12,5	10	50,71	136,92



SATIN-FINISH STAINLESS STEEL AISI 304/1.4301-V2A

bar length 2,7 lm - pack. 1 Pc

Article	H mm	L mm	€/ml	€/Pc
PLTCHACS 0812	8	12	47,09	127,14
PLTCHACS 1012	10	12	49,51	133,68
PLTCHACS 1112	11	12	51,92	140,18
PLTCHACS 12512	12,5	12	54,34	146,72

SATIN-FINISH STAINLESS STEEL AISI 304/1.4301-V2A

bar length 2,7 lm - pack. 1 Pc

Article	H mm	L mm	€/ml	€/Pc
PLTCHACS 0808	8	08	47,09	127,14
PLTCHACS 1008	10	08	49,51	133,68
PLTCHACS 1108	11	08	51,92	140,18
PLTCHACS 12508	12,5	08	54,34	146,72

SATIN-FINISH STAINLESS STEEL AISI 304/1.4301-V2A


bar length 2,7 lm - pack. 1 Pc

Article	H mm	L mm	€/ml	€/Pc
PLTCHACS 0810	8	10	47,09	127,14
PLTCHACS 1010	10	10	49,51	133,68
PLTCHACS 1110	11	10	51,92	140,18
PLTCHACS 12510	12,5	10	54,34	146,72


PROLISTEL CHANNEL

ANODIZED AND POLISHED ALUMINIUM

PLTCH... 08 - 10 - 11 - 12,5
scale 1:1




EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

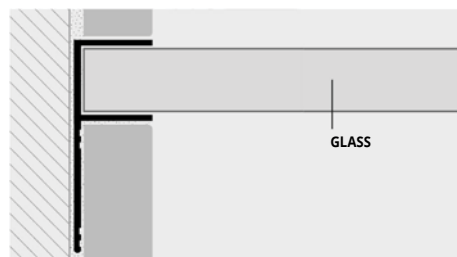

1. Choose "PROLISTEL CHANNEL" according to the visible surface and desired finish. 2. Cut "PROLISTEL CHANNEL" to the desired length and apply the adhesive on the surface where the profile will be laid. 3. Press "PROLISTEL CHANNEL" into the adhesive, aligning it with the tiles leaving a 2 mm. joint. Remove immediately all remains of adhesive from the surface of the profile. 4. Fill the joint between the profile and tiles with grout in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

PROLISTEL CHANNEL is a F-shaped strip in anodized and polished aluminum suitable to decorate the wall coverings in ceramic tiles and natural stones. Its section allows the realization of a decorative joint which can also be used as a guide for the fixing of sheets of glass on floors and walls. Its particular section and the availability in two different finishes make **PROLISTEL CHANNEL** a much sought-after profile that allows an easy workmanlike application.

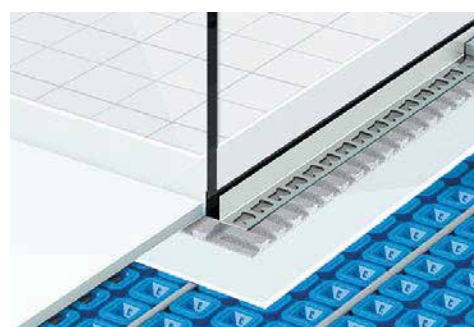


ANODIZED SILVER ALUMINIUM

bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/ml	€/Pc
PLTCHAA 08	8	14,31	38,64
PLTCHAA 10	10	15,55	41,99
PLTCHAA 11	11	16,48	44,50
PLTCHAA 125	12,5	17,41	47,01

COLOURS



POLISHED CHROME ALUMINIUM


bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/ml	€/Pc
PLTCHBC 08	8	16,80	45,36
PLTCHBC 10	10	18,04	48,71
PLTCHBC 11	11	18,97	51,22
PLTCHBC 125	12,5	19,90	53,73

News 2021

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs.

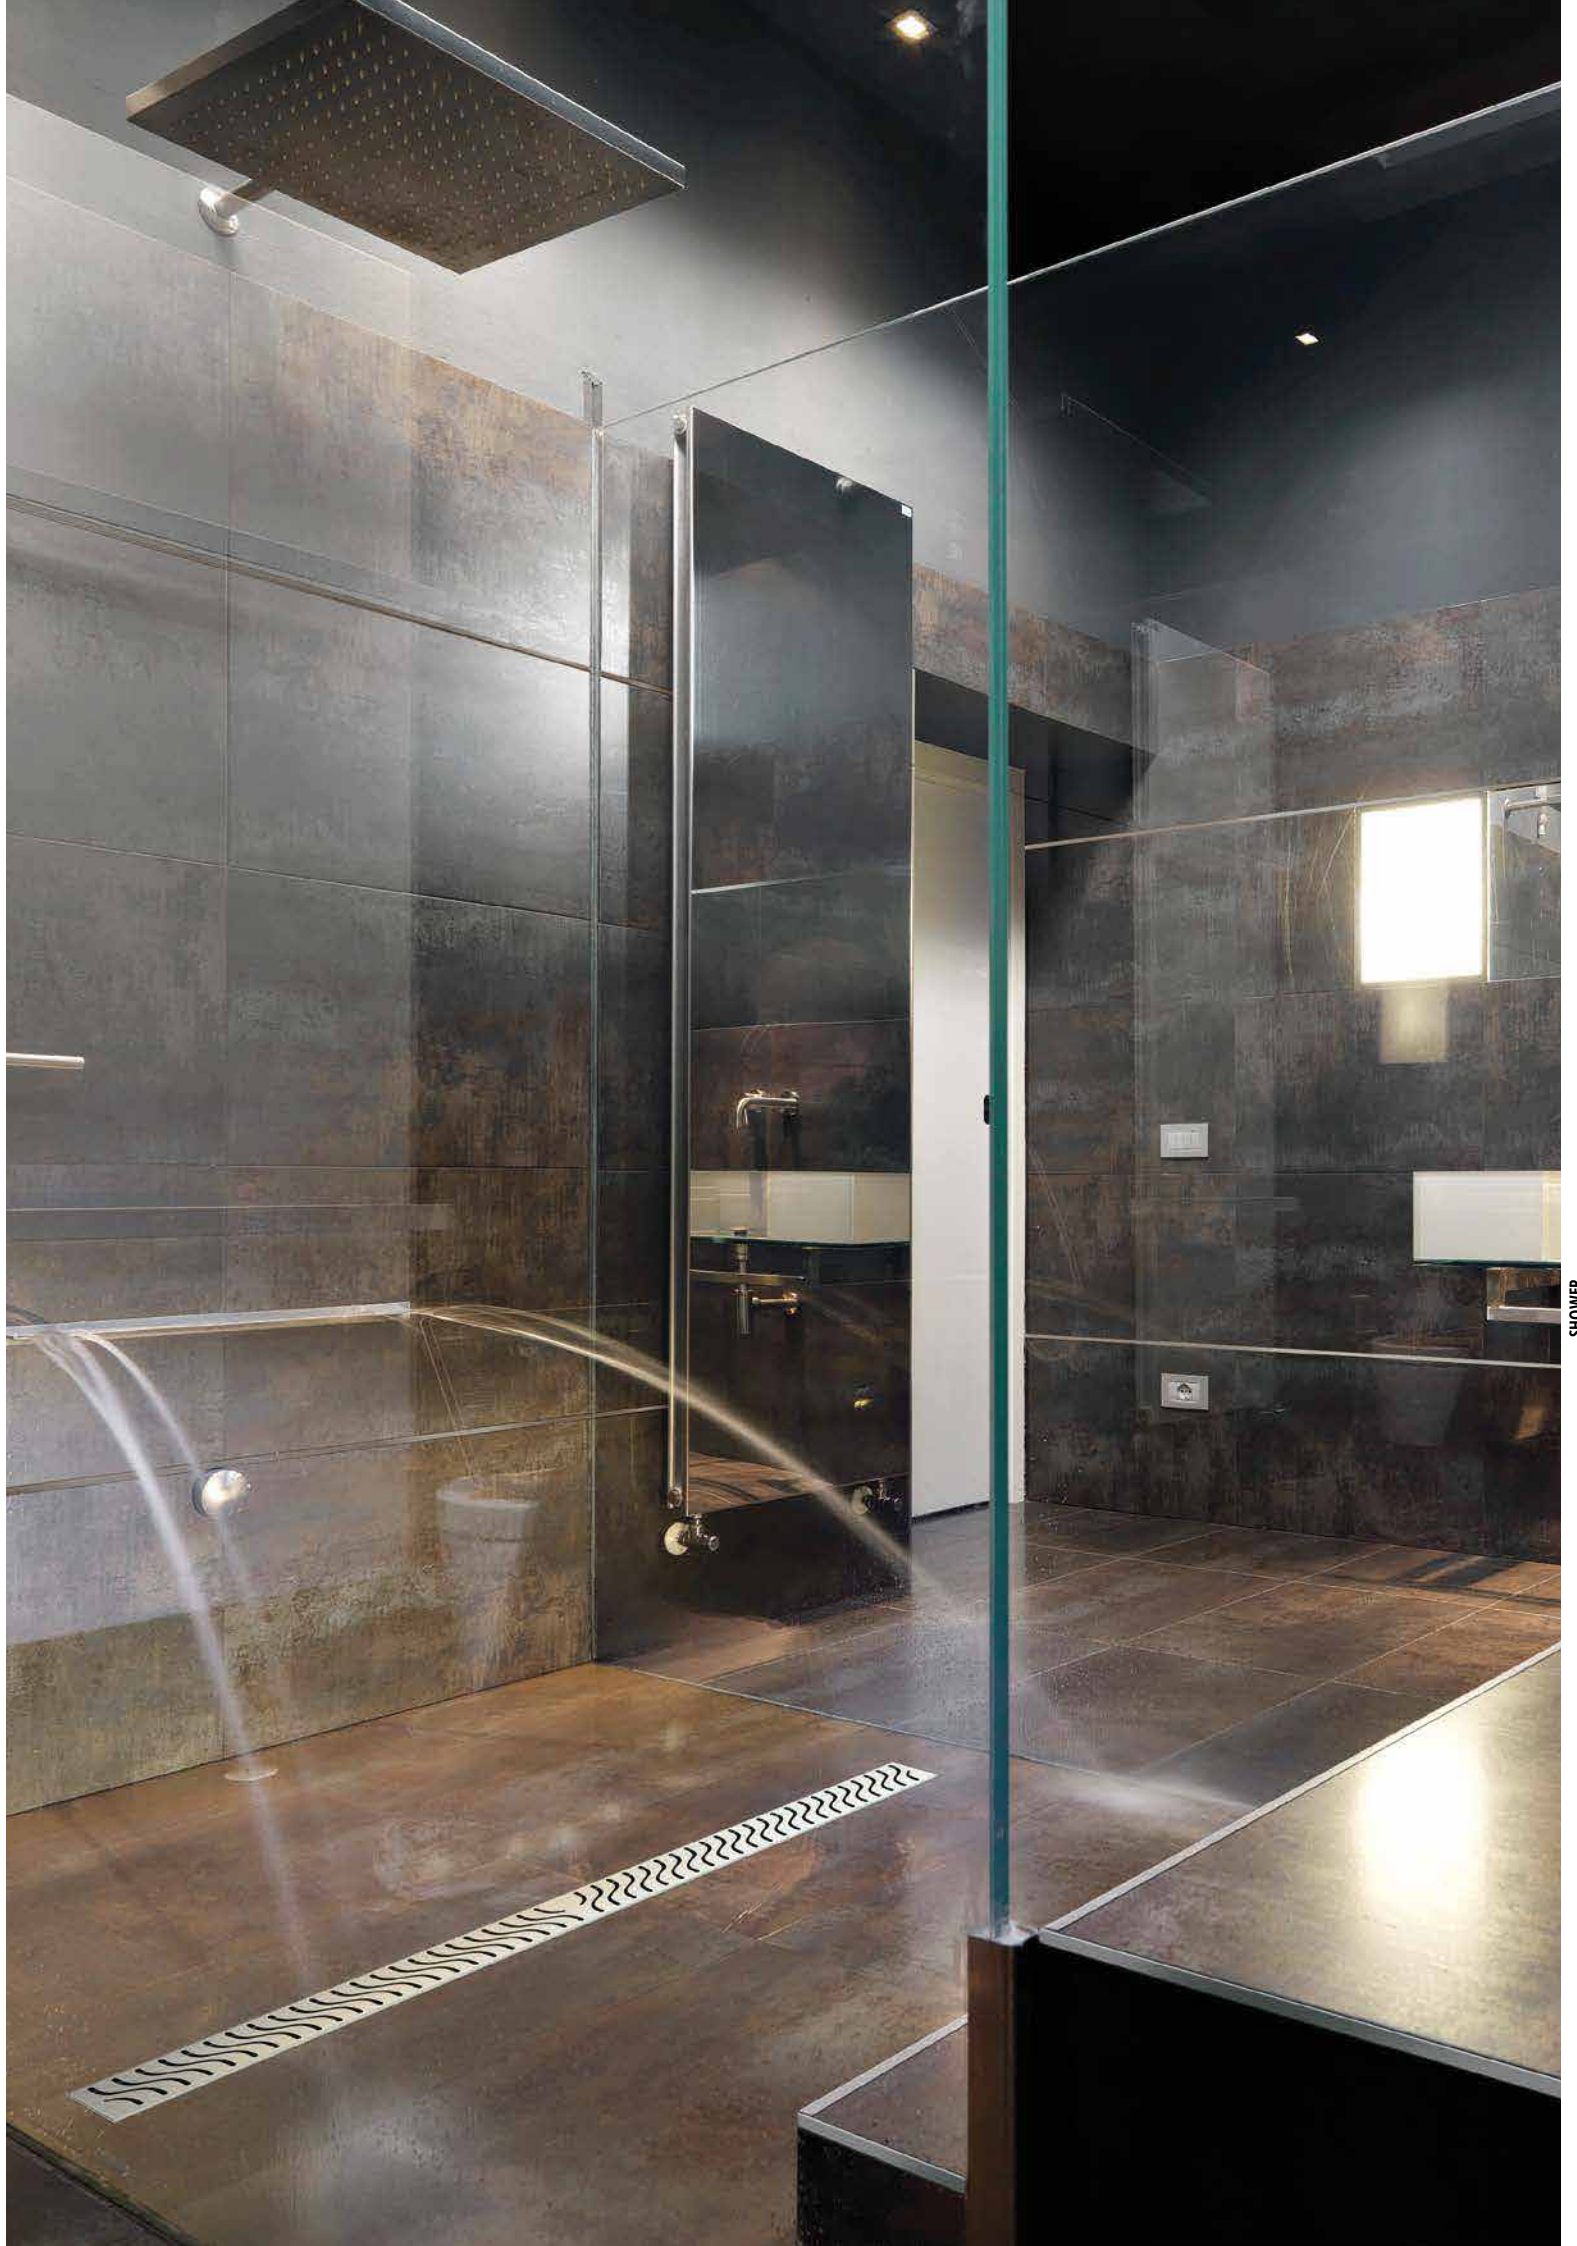

PROSHOWER CENTRAL KIT SYSTEM

PROSHOWER CENTRAL KIT SYSTEM is an innovative solution, which combines functionality and design to answer to all requirements of the shower.



Article	Description	Pc/Pack.	€/Pc
PSHPANCEK	PROSHOWER CENTRAL KIT SYSTEM	1	428,93

Article	Kit components	Pc/Pack.
PSHPANC	PROSHOWER PANEL CENTRAL - moulded polystyrene 120 cm x 120 cm	1
PRBFXB	PROBAND FIX white	2
PRBPE 1507	PROBAND 150 - 7,5 lm	1
PFLO 0405	PROFOIL ROLL - 5 lm	1
PRSPD 10	PVC TOWEL	1
PSHLDK	PROSHOWER DRAIN LATERAL KIT	1



PROSHOWER PANEL CENTRAL
PSHPANC




PROFOIL
PFLO 0405



PROBAND 150
PRBPE 1507




PROBAND FIX
PRBFXB




PVC TOWEL
PRSPD 10

Article	Description	Pc/Pack.	€/Pc
PSHPANC	PROSHOWER PANEL CENTRAL - moulded polystyrene 120 cm x 120 cm	1	212,74



PROSHOWER PANEL CENTRAL
PSHPANC

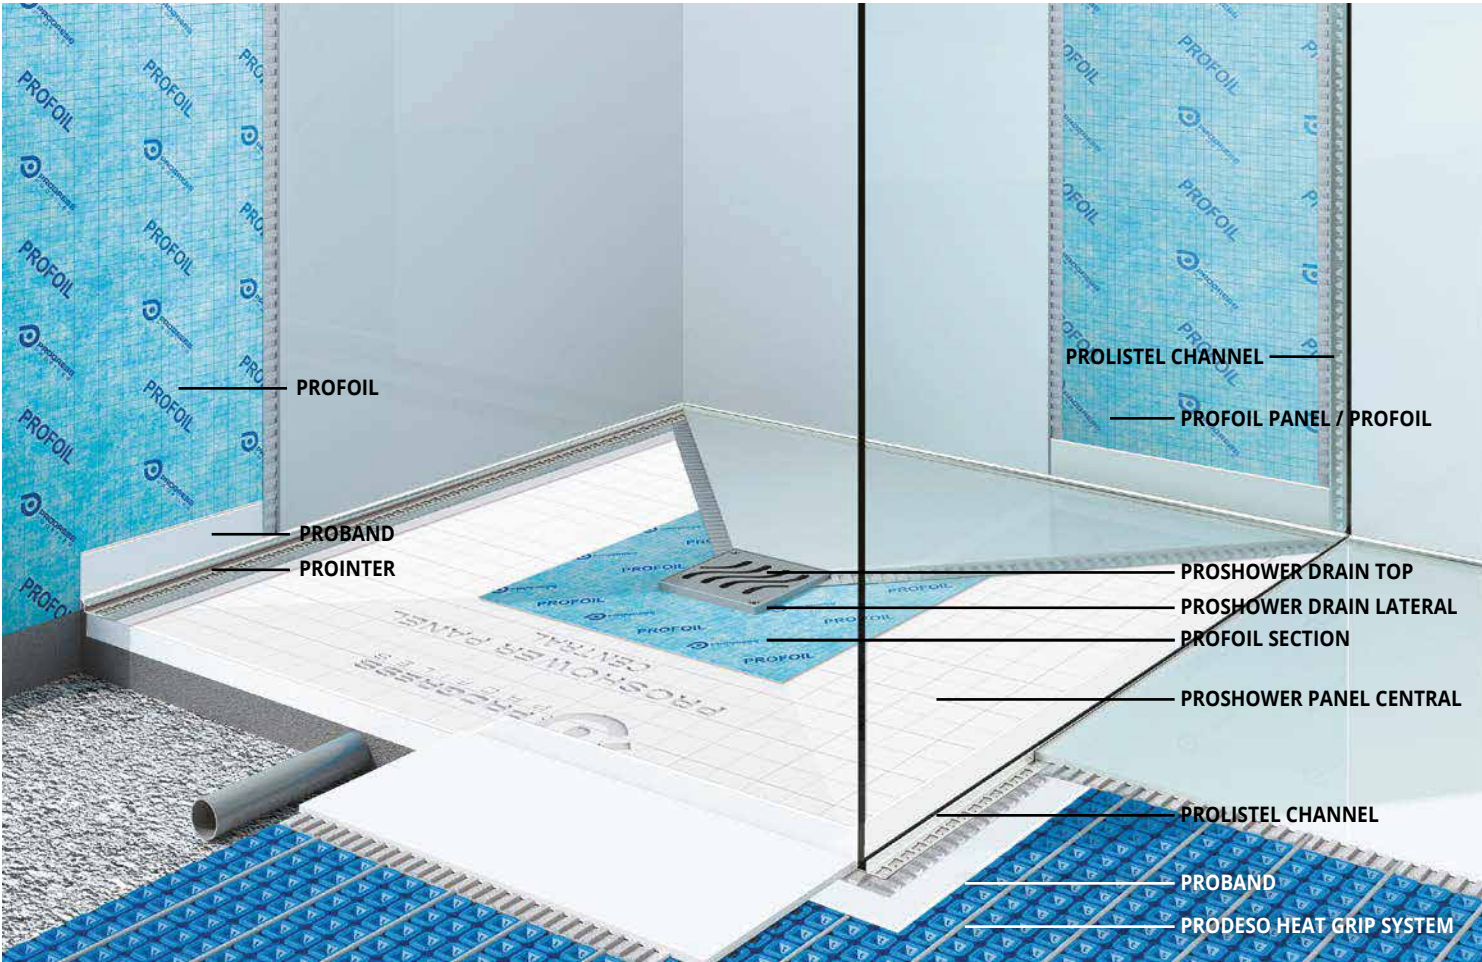

PROSHOWER LATERAL DRAIN KIT are 2 central drain systems with lateral outflow equipped with a siphon, grate support, stainless steel grate, butyl double-sided ring for the fixing of the waterproof section, waterproof section and a protection cap with template function too that allows the correct positioning of the butyl ring and the waterproof section. LATERAL AND VERTICAL DRAIN KIT ensure a correct flow of rainwater.


PROSHOWER DRAIN KIT

LATERAL AND VERTICAL DRAINS

Article	Description	Pc/Pack.	€/Pc
PSHLDK	PROSHOWER DRAIN LATERAL KIT	1	150,94

AREA OF USE

- **Use** - PROSHOWER BASE L PRO it can be used in any indoor and outdoor environment.
- **Don't use** - In environments where very aggressive substances are used and a high concentrated load is expected.

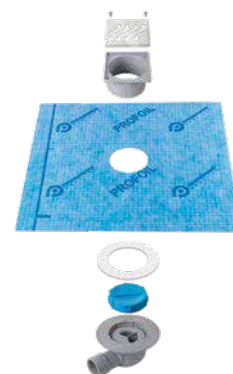

PROSHOWER DRAIN CENTRAL PRO is a 10x10 cm stainless steel AISI 316L / 1.4404 - V4A drain for the realisation of floor-level shower. This low thickness drain is equipped with a grid that can also be tiled for floor-level drains. PROSHOWER DRAIN CENTRAL PRO has excellent chemical resistance and is equipped with a 360 ° adjustable siphon.

PROSHOWER DRAIN CENTRAL PRO

LATERAL DRAIN

PROSHOWER DRAIN CENTRAL PRO - GRATE + POLYSTYRENE CHANNEL PROTECTION + PROFOIL SECTION + DUCT BODY + SIPHON


Article	Description	Pc/Pack.	€/Pc
PSHWCP	PROSHOWER DRAIN CENTRAL PRO	1	168,00

AREA OF USE

- **Use** - Balconies, terraces, outdoor surfaces of any size, kitchens and showers.
- **Don't use** - In environments subject to heavy traffic and where washing with acidic and strong alkaline substances is foreseen.

WARNINGS

After the drain installation, apply the protective cap. Before applying the butyl double-sided adhesive ring on the flange of the drain, thoroughly clean the flange of any dirt residue that may compromise its adhesion. Apply the butyl double-sided adhesive ring and the waterproofing section during the application of the waterproofing system.

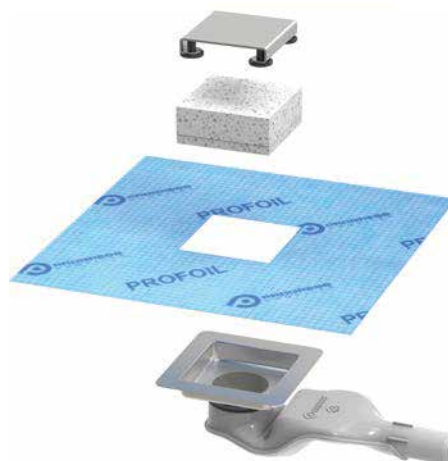


PROFOIL PANEL

HIGH DENSITY EXTRUDED
POLYSTYRENE PANEL

PROFOIL PANEL are high density extruded polystyrene panels covered on both sides with a steam- and waterproofing membrane. The membrane is waterproofing and the adhesive to fix them reinforces the panels for a quick and inexpensive laying.

PFLPAN...

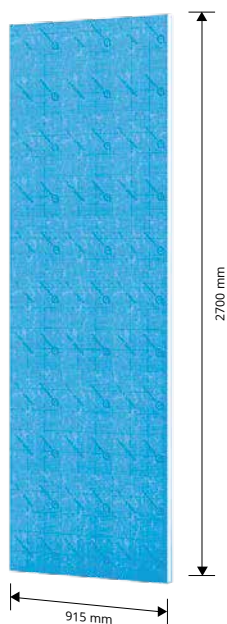

WEBSITE





PROFOIL PANEL 2700 mm - high density extruded polystyrene
915 mm x 2700 mm = 2,470 m²

Article	H mm	Pcs/pallet	Mq/pallet	€/Mq	€/Pc	€/Pallet
PFLPAN927	9,50	80	197,60	44,22	109,22	8737,60
PFLPAN1327	12,70	60	148,20	45,71	112,90	6774,00
PFLPAN1627	15,90	50	123,50	49,19	121,50	6075,00
PFLPAN2527	25,00	30	74,10	50,31	124,27	3728,10
PFLPAN3827	38,10	20	49,40	60,63	149,76	2995,20
PFLPAN5027	50,80	15	37,05	69,58	171,86	2577,90

PROFOIL PANEL in 1524 mm is available only in small quantity.
Please contact the office for availability.

PROFOIL PANEL THICKNESS

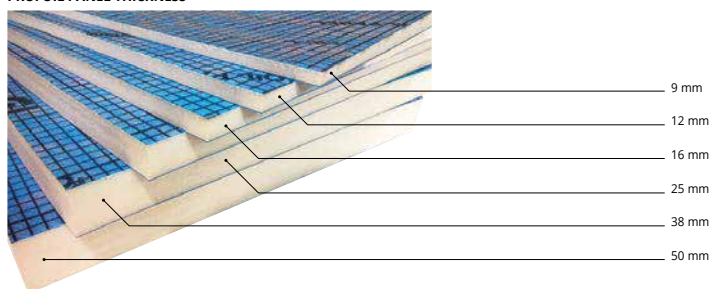

© 2022 All rights reserved by Progress Profiles, Printed in Italy

PROFOIL AND PROBAND DOWELS, WASHERS, SCREWS

STAINLESS STEEL/ZINC-COATED METAL/GLASS FIBER NET




PROFOIL DOWELS - ZINC-COATED METAL - pack. 250 Pc

Article	L mm	€/Pc	€/Pack.
TZPFP 110	100	1,62	405,00
TZPFP 140	140	1,80	450,00
TZPFP 170	170	1,99	497,50
TZPFP 200	200	2,17	542,50



PROFOIL DOWELS - STAINLESS STEEL - pack. 250 Pc

Article	L mm	€/Pc	€/Pack.
TIPFP 110	110	3,12	780,00
TIPFP 140	140	3,36	840,00
TIPFP 170	170	3,61	902,50
TIPFP 200	200	3,85	962,50
TIPFP 250	250	4,48	1120,00



PROFOIL PANEL SCREWS (ZINC-COATED METAL)

Article	Pcs/Pack.	L mm	€/Pc	€/Pack.
VACFPF 35	1000	35	0,040	40,00
VACFPF 55	1000	45	0,045	45,00
VACFPF 80	1000	80	0,093	93,00



PROFOIL PANEL WASHERS (ZINC-COATED METAL) - pack. 100 Pc

Article	Pcs/Pack.	Ø mm	€/Pc	€/Pack.
RFPFP 36	100	35	0,30	30,00

PROFOIL PANEL NICHE are prefabricated built-in elements of PROFOIL PANEL to make indoor wall niches and support surfaces. The niches can be linked to the waterproofing systems PROFOIL and PROFOIL PANEL. The fixing of the shelf inside the niche is optional. The shelf, part of the, can be fixed at the needed height. It is available in 4 sizes.


PROFOIL PANEL NICHE

HIGH DENSITY EXTRUDED POLYSTYRENE


PROFOIL PANEL NICHE - WATERPROOFING NICHE

Article	Description	Pcs/Pack.	€/Pc
PFLPANICH 88	WATERPROOFING NICHE MADE OF PROFOIL PANEL of 12,5mm, Inside size of the niche 203,2 x 203,2 mm	1	66,35
PFLPANICH 1212	WATERPROOFING NICHE MADE OF PROFOIL PANEL of 12,5mm, Inside size of the niche 304,8 x 304,8 mm	1	77,15
PFLPANICH 821	WATERPROOFING NICHE MADE OF PROFOIL PANEL of 12,5mm, Inside size of the niche 203,2 x 533,4 mm	1	102,03
PFLPANICH 1221	WATERPROOFING NICHE MADE OF PROFOIL PANEL of 12,5mm, Inside size of the niche 304,8 x 533,4 mm	1	114,60


PFLPANICH 88




PFLPANICH 1212




PFLPANICH 821




PFLPANICH 1221




PFLPANICH 1212




PFLPANICH 88



PFLPANICH 1221

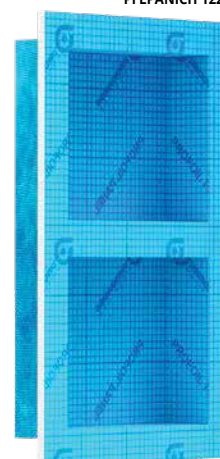

PFLPANICH 821

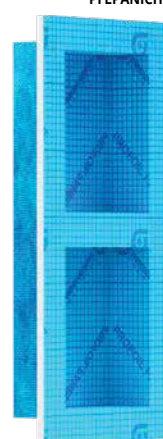

PROFOIL PROFOIL PRO

ROLLS IN HDPE AND PP

PROFOIL is a waterproofing polyethylene membrabe with nonwoven polypropylene fabric on both side that guarantees high adhesion to the support.

PROFOIL PRO is a waterproofing elastic polyethylene membrane with nonwoven polypropylene fabric on both side that guarantees high adhesion to the support.

PROFOIL - ROLLS IN HDPE AND PP - Thickness 0,42 mm ROLLS IN HDPE AND PP - Thickness 0,42 mm

Article	Width roll H x L Im	total m ²	Rolls/pallet	€/m ²	€/Roll	€/pallet
PFLO 0430	1 x 30	30	40	13,86	415,80	16632,00
PFLO 0405	1 x 5	5	154	19,29	96,45	14853,30

PROFOIL PRO - ELASTIC ROLLS IN HDPE AND PP - Thickness 0,42 mm PP


Article	Width roll H x L Im	total m ²	Rolls/pallet	€/m ²	€/Roll	€/pallet
PFLOPR 0430	1 x 30	30	40	16,28	488,40	19536,00

AREAS OF USE

• **Use.** Waterproofing of substrates and vertical structures before the laying of ceramic in areas subject to occasional contact with water like bathrooms and kitchens, saunas and Turkish baths. **PROFOIL PRO** can also be used in environments with permanent contact with water like swimming pools and tanks. • **Don't use.** On bituminous coverings, over insulating panels and lightweight screed.

WARNINGS

Store in a cool and dry place avoiding direct sunlight and sources of heat. Read the data sheet before applying; in case of special applications please call the technical department.

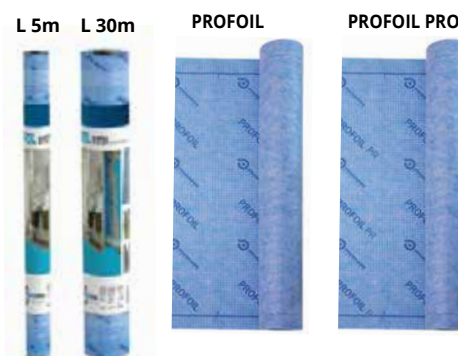

WEBSITE



PROFOIL PASTE

WATERPROOFING ELASTIC MEMBRANE

PROFOIL PASTE is a ready to use thin-layer waterproofing elastic membrane with low emissions of volatile organic compounds.



WATERPROOFING ELASTIC MEMBRANE

Article	Kg./ Bucket	Bucket/ Pallet	€/Kg.	€/Bucket	€/Pallet
PFLOPST 04	4	64	12,13	48,52	3105,28
PFLOPST 10	10	36	11,51	115,10	4143,60

AREAS OF USE

• **Use.** Waterproofing for bathrooms, kitchens, showers, gypsum-based plasters, cement-based plaster and plasterboard walls. • **Don't use.** For external application, on wet surfaces or substrates subject to moisture rising, in environments where water is always present, pools and tanks.

WARNINGS

Store in a cool and dry place avoiding direct sunlight and sources of heat. Read the data sheet before applying; in case of special applications please call the technical department.

PROBAND 150/250

ELASTIC ROLLS IN HDPE AND PP



ROLLS IN HDPE AND PP - Thickness 0,42 mm

Article	Roll width H mm x L Im	Rolls/ Pack.	€/lm	€/Roll	€/Pack.
PRBPE 1507	150 x 7,5	16	5,43	40,73	651,68
PRBPE 1530	150 x 30	6	3,98	119,40	716,40
PRBPE 2530	250 x 30	3	7,31	219,30	657,90

CORNERS and PIPE COLLAR

HDPE E PP



PRBE

PRBI

PRBT

PREFORMED ELASTIC CORNERS AND PIPE COLLAR IN HDPE AND PP
Thickness 0,42 mm

Article	H x L mm	€/Pc	€/Pack.
PRBI	60 x 120	7,84	78,40
PRBE	60 x 120	7,84	78,40
PRBT	125 x 125	6,94	69,40

PROBAND FIX

MOISTURE-CURE SEALANT



MOISTURE-CURE SEALANT

pack. of 12 cartridges - B (white) - G (grey)

Article	Cartridge lm	€/Pc	€/Pack.
PRBFXB	290	16,80	201,60
PRBFXG	290	16,80	201,60



GUN FOR MOISTURE-CURE SEALANT CARTRIDGE

Article	Pc/Pack	€/Pc
PRBFXGUN	1	335,81



MOISTURE-CURE SEALANT CARTRIDGE

pack. of 12 cartridges - B (white) - G (grey)

Articolo	Cartridge lm	€/Pc	€/Pack.
PRBFXUB	600	32,96	395,52
PRBFXUG	600	32,96	395,52

PROSHELF are tileable shelves in stainless steel AISI 316/1.4404-V4A for the underile installation. Thanks of their perforated fixing flaps, they are easily installed on the wall during the laying of the ceramic coating. They are available in 2 shapes, triangular for the corner installation and rectangular. These shelves are suitable for the installation in Bathroom and kitchens.

PROSHELF

STAINLESS STEEL AISI 316/1.4404-V4A


PROSHELF - STAINLESS STEEL AISI 316/1.4404-V4A TRIANGULAR TILEABLE SHELF

Article	size	Pc/Pack.	€/Pc
PRSHLFTP24	170 mm x 240 mm	1	79,09
PRSHLFTP30	212 mm x 300 mm	1	90,56



PROSHELF - STAINLESS STEEL AISI 316/1.4404-V4A RECTANGULAR TILEABLE SHELF

Article	size	Pc/Pack.	€/Pc
PRSHLFRP40	150 mm x 400 mm	1	138,86
PRSHLFRP30	115 mm x 300 mm	1	126,79

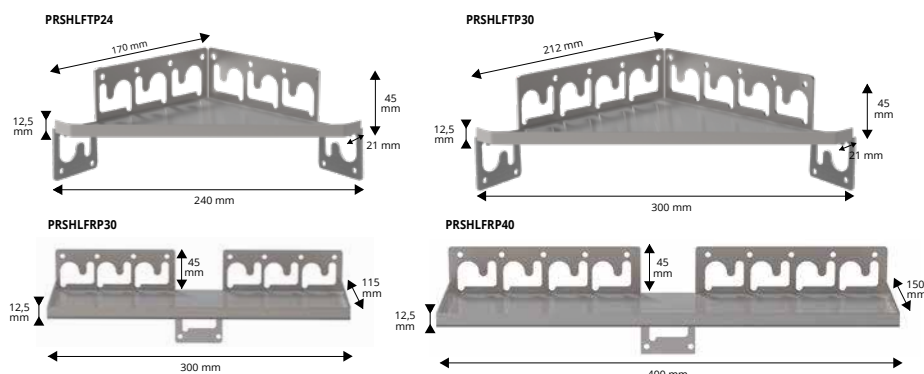


PROSHELF - STAINLESS STEEL AISI 316/1.4404-V4A TRIANGULAR SHELF

Article	size	Pc/Pack.	€/Pc
PRSHLFTD24	170 mm x 240 mm	1	120,75
PRSHLFTD30	212 mm x 300 mm	1	132,83




PROSHELF - STAINLESS STEEL AISI 316/1.4404-V4A RECTANGULAR SHELF


Article	size	Pc/Pack.	€/Pc
PRSHLFRD40	150 mm x 400 mm	1	181,13
PRSHLFRD30	115 mm x 300 mm	1	163,01

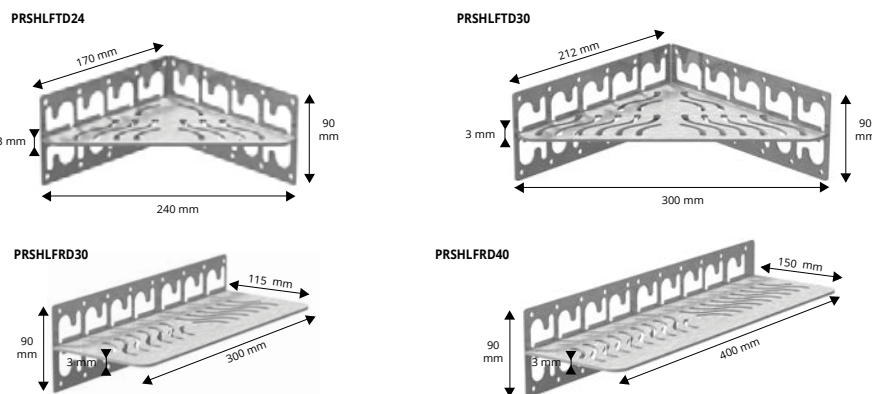

EXAMPLES OF LAYING

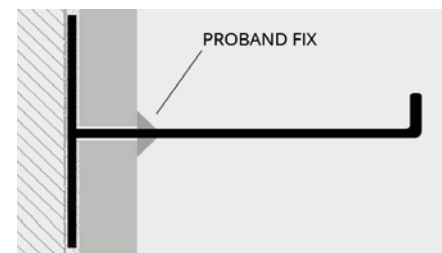

1. Choose "PROSHELF" according to the desired shape and size. 2. apply the adhesive on the support where the shelf will be installed. 3. Press the anchoring flap into the adhesive; 4. Lay the tiles taking care to align them with the shelf. Immediately remove adhesive residues from the surface of the shelf. 5. Carefully seal the joints between the shelf and tiles with PROBAND FIX to avoid water stagnation. Remove any grout residue from the shelf surface.

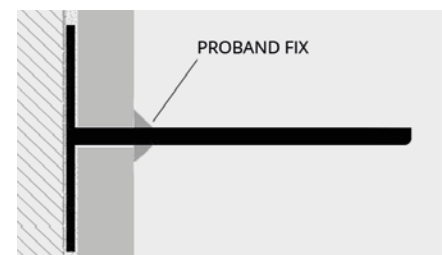

PRO GOBOARD PANEL highdensity polyisocyanurate foam panel, covered on both sides with a fibre-glass reinforced cement-based waterproof coating to allow the laying of tiles. The panels, tested for a resistance long duration, are available in thickness of 6,25 / 12,5 / 25 and 50 mm, size of 92 x 152 cm and 122 x 244 cm and can be used on floors, false ceilings, walls, showers and ceilings.

PRO GOBOARD PANEL

HIGH DENSITY POLYISOCYANURATE
FOAM PANEL

PRO GOBOARD PANEL - highdensity polyisocyanurate foam

Article	Description	Pcs/pallet	m²/pallet	€/m²	€/Pc	€/Pallet
PGOBOR06	PRO GOBOARD H 6,25 mm - 92 cm x 152 cm - 1,40 m²	75	105	38,81	54,33	4075,05
PGOBOR125	PRO GOBOARD H 12,5 mm - 92 cm x 152 cm - 1,40 m²	60	84	43,12	60,37	3622,08
PGOBOR25	PRO GOBOARD H 25 mm - 122 cm x 244 cm - 2,98 m²	30	89,4	76,99	229,16	6874,86
PGOBOR50	PRO GOBOARD H 50 mm - 122 cm x 244 cm - 2,98 m²	15	44,70	119,54	356,23	53343,44


PGOBOR...





PROHEATER SYSTEM


PROHEATER is a wall porcelain stone tiled design heater that warms your bathroom with elegance and style

PROHEATER - WALL PORCELAIN STONE TILED HEATING SYSTEM

Article	Description	€/pc	
 PHTST...	Proheater 60 x 152 cm	4719,75	*
Available in various ceramic finishes. The code of the chosen color must be added to the article code. Ex: PHTST... (chosen color 01 - Lincoln); PHTST01.			

PROHEATER TOWEL RACK - Pack. 2 Pcs


Article	Description	€/Pack.	
 PHTPSB	White varnished metal towel rack	530,25	*
 PHTPSN	Black varnished metal towel rack	530,25	*

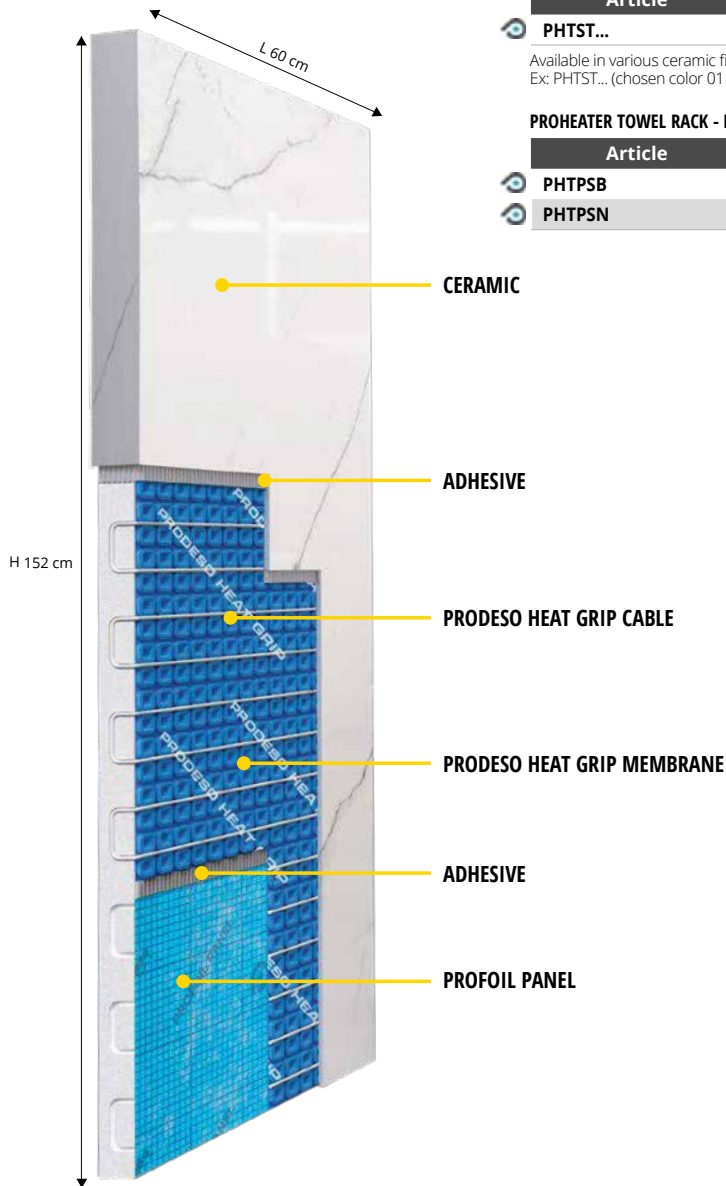

PROHEATER WITH TOWEL RACK



CERAMIC COLOR RANGE

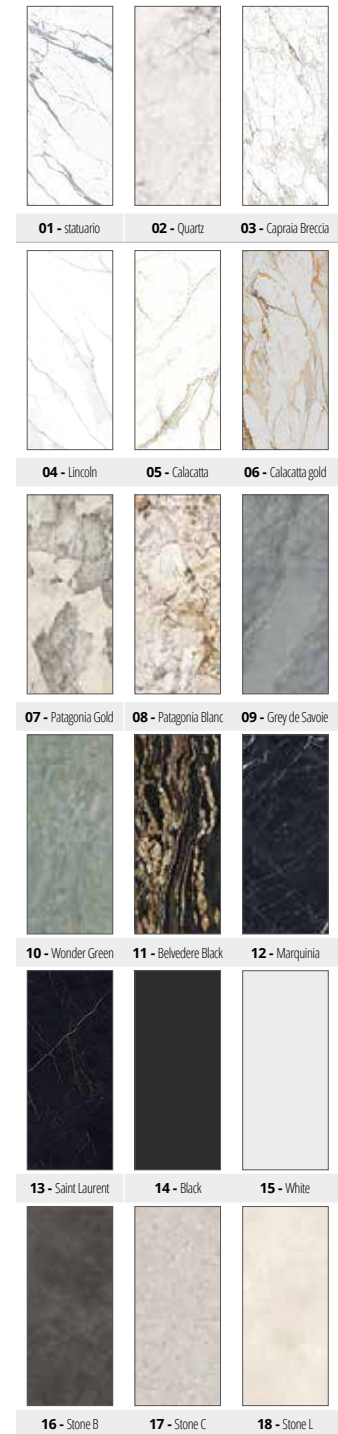

© 2022 All rights reserved by Progress Profiles. Printed in Italy

