



Product catalog

Commercial flooring and wall systems

2023 edition

POWERED BY:

PREMIER

premier.partners

est.
1919

Altro has been at the forefront of innovation for over 100 years. Today, working closely with architects, end customers, engineers, designers and contractors around the world, our insight and expertise help them transform everyday spaces into environments that can improve the well-being of everyone that uses them.

And by consistently turning creative thinking into practical, real-world solutions – that maintain the highest standards of safety and durability – Altro has become synonymous with quality.

As a family-founded business, we have a strong sense of what we value and a way of thinking inspired by The Bauhaus – a balance of quality, form and design-led function – that puts people's needs at the heart of everything we do. It's a human-centered approach to designing for the demands of 21st century life. It's a history that means we value the bold, the brave and the new. From focusing on how the different sectors we serve need their spaces to perform, to the call for more environmentally sustainable materials, Altro is constantly challenging what is possible and seeking new ways of inspiring our customers and answering their biggest challenges.

With offices across Europe, the Americas, Asia Pacific and the Middle East, we remain committed to developing solutions that stand the test of time.

We combine the best in contemporary style with the functionality required to improve the way we all live and work, wherever in the world that may be.

We are Altro.

**Designed for possibilities.
Made for people.**

I HEREBY CERTIFY that THE ADAMITE CO
LIMITED is this day Incorporated under the Compa
1908 to 1917, and that the Company is LIMITED.

Given under my hand at London this Seventh d
One Thousand Nine Hundred and Nineteen.

A.E. TAYLOR,

Assistant Registrar of J
Companies.

ADAMITE

make

ALTRO FLOORINGS
Safety and Heavy Duty
and
VYNOLEUM

The flooring with the two best sides

ALTRO HEAVY DUTY FLOORING
Pure P.V.C. on a hessian base. 2.5 m.m.

ALTRO SAFETY FLOORING
as above but containing aluminium oxide
abrasive grain. 2.5 m.m. and 4 m.m.

Of exceptional toughness these industrial
floor coverings have a tested wear resistance
greater than that of pressed granite paving
flags. Unaffected by chemicals, variations in
temperature or excess moisture, Altro
floorings have been developed to satisfy the
most exacting demands. Installations include
Hospitals, Laboratories, Breweries, Factories,
Banks, Offices, Schools and Golf Clubs.

Heavy Duty in rolls 72" wide and laid for
approximately 32/- per sq. yard. Safety, as
laid from approximately 40/- per

a soft,
atterns,
ery
he Age
stories

01

welcome to Altro

Table of contents	1
Our sector expertise	2
The sectors we work in	4
Our sustainability vision	8
Altro cleaning technology	10

12

safety flooring

Why choose safety flooring?	14
Assess your slip risk	15
Measuring slip-resistance	16
Altro Stronghold 30	18
Altro Classic 25	20
Altro Atlas 40	22
Altro Aquarius	24
Altro Marine 20	28
Technical chart	31

30

slip-resistant flooring

Why choose slip-resistant?	34
Measuring durability, chemical + stain resistance	35
Altro Reliance 25	36
Altro Walkway 20	40
Altro Illustra	44
Altro Promenade	46
Technical chart	49

48

adhesive-free flooring

Why choose adhesive-free?	52
Altro XpressLay	54
Altro Stronghold 30 A.F.	58
Altro Illustra adhesive-free	60
Altro Wood adhesive-free	62
Altro Cantata	64
Technical chart	69

70

smooth flooring

Why choose smooth flooring?	72
Altro Symphonia	74
Altro Operetta	78
Altro Orchestra	82
Altro Serenade	88
Altro Wood	90
Altro Wood Comfort	94
Altro Wood Acoustic	98
Altro Lavencia LVT	100
Altro Quartz Tile	106
Altro Ollero rubber tile	110
Altro Dolce Tile	114
Technical chart	118

120

wall systems

Why choose Altro walls?	122
Our wall portfolio	123
Altro Whiterock	124
Integrated floors and walls	128
Altro Whiterock Matte	130
Altro Puresentials	132
Altro Whiterock Chameleon	134
Altro Whiterock wall designs	136
Altro Tegulis	138
Altro Whiterock PopArt	140
Altro Whiterock Digiclad	142
Altro Whiterock Whiteboard	144
AW Recessed Shelf	145
Altro Puraguard	146
Altro Fortis Titanium 15	148
Technical chart	150

152

even more Altro

Floor accessories	154
Altro Whiterock accessories	153
Altro Fortis Titanium 15 accs.	156
Altro Puraguard accessories	157
Additional support	158
Installer training	160
Your education path	162

How much longer
can Altro Safety go
on performing like
London Palladium

Watch our
corporate video
on altro.com



Our sector expertise

To work across multiple sectors requires real-world understanding: the ability to design for a purpose and address the challenges, issues and regulations for each industry, without ever compromising on quality or safety.

We bring a wealth of insight into every project – experience that keeps us at the forefront of design-led innovation – and a range of relevant products and unique solutions that not only help our customers realize their ambitions, but have the potential to transform everyday spaces into something special.


We invite you to discover some of our sectors, in brief, over the next few pages or on our website altro.com.

Sectors

- ☑ Healthcare
- ☑ Hospitality
- ☑ Senior living
- ☑ Manufacturing
- ☑ Education
- ☑ Food + drink production
- ☑ Housing
- ☑ Leisure
- ☑ Retail + offices
- ☑ Transport

To do list

- ☑ Place customers first
- ☑ Encourage collaboration – internal + external
- ☑ Value our customers + each other
- ☑ Create a culture of commitment
 - ☑ commit to performance
 - ☑ commit to Partnerships
 - ☑ commit to Possibilities
- ☑ Design and innovate floors and walls
 - ☑ fit for purpose
 - ☑ work across many sectors
 - ☑ address challenges + regulations
 - ☑ maintain safety + durability
 - ☑ Share knowledge + insight with all
- ☑ provide products + solutions that turn everyday spaces into something special!

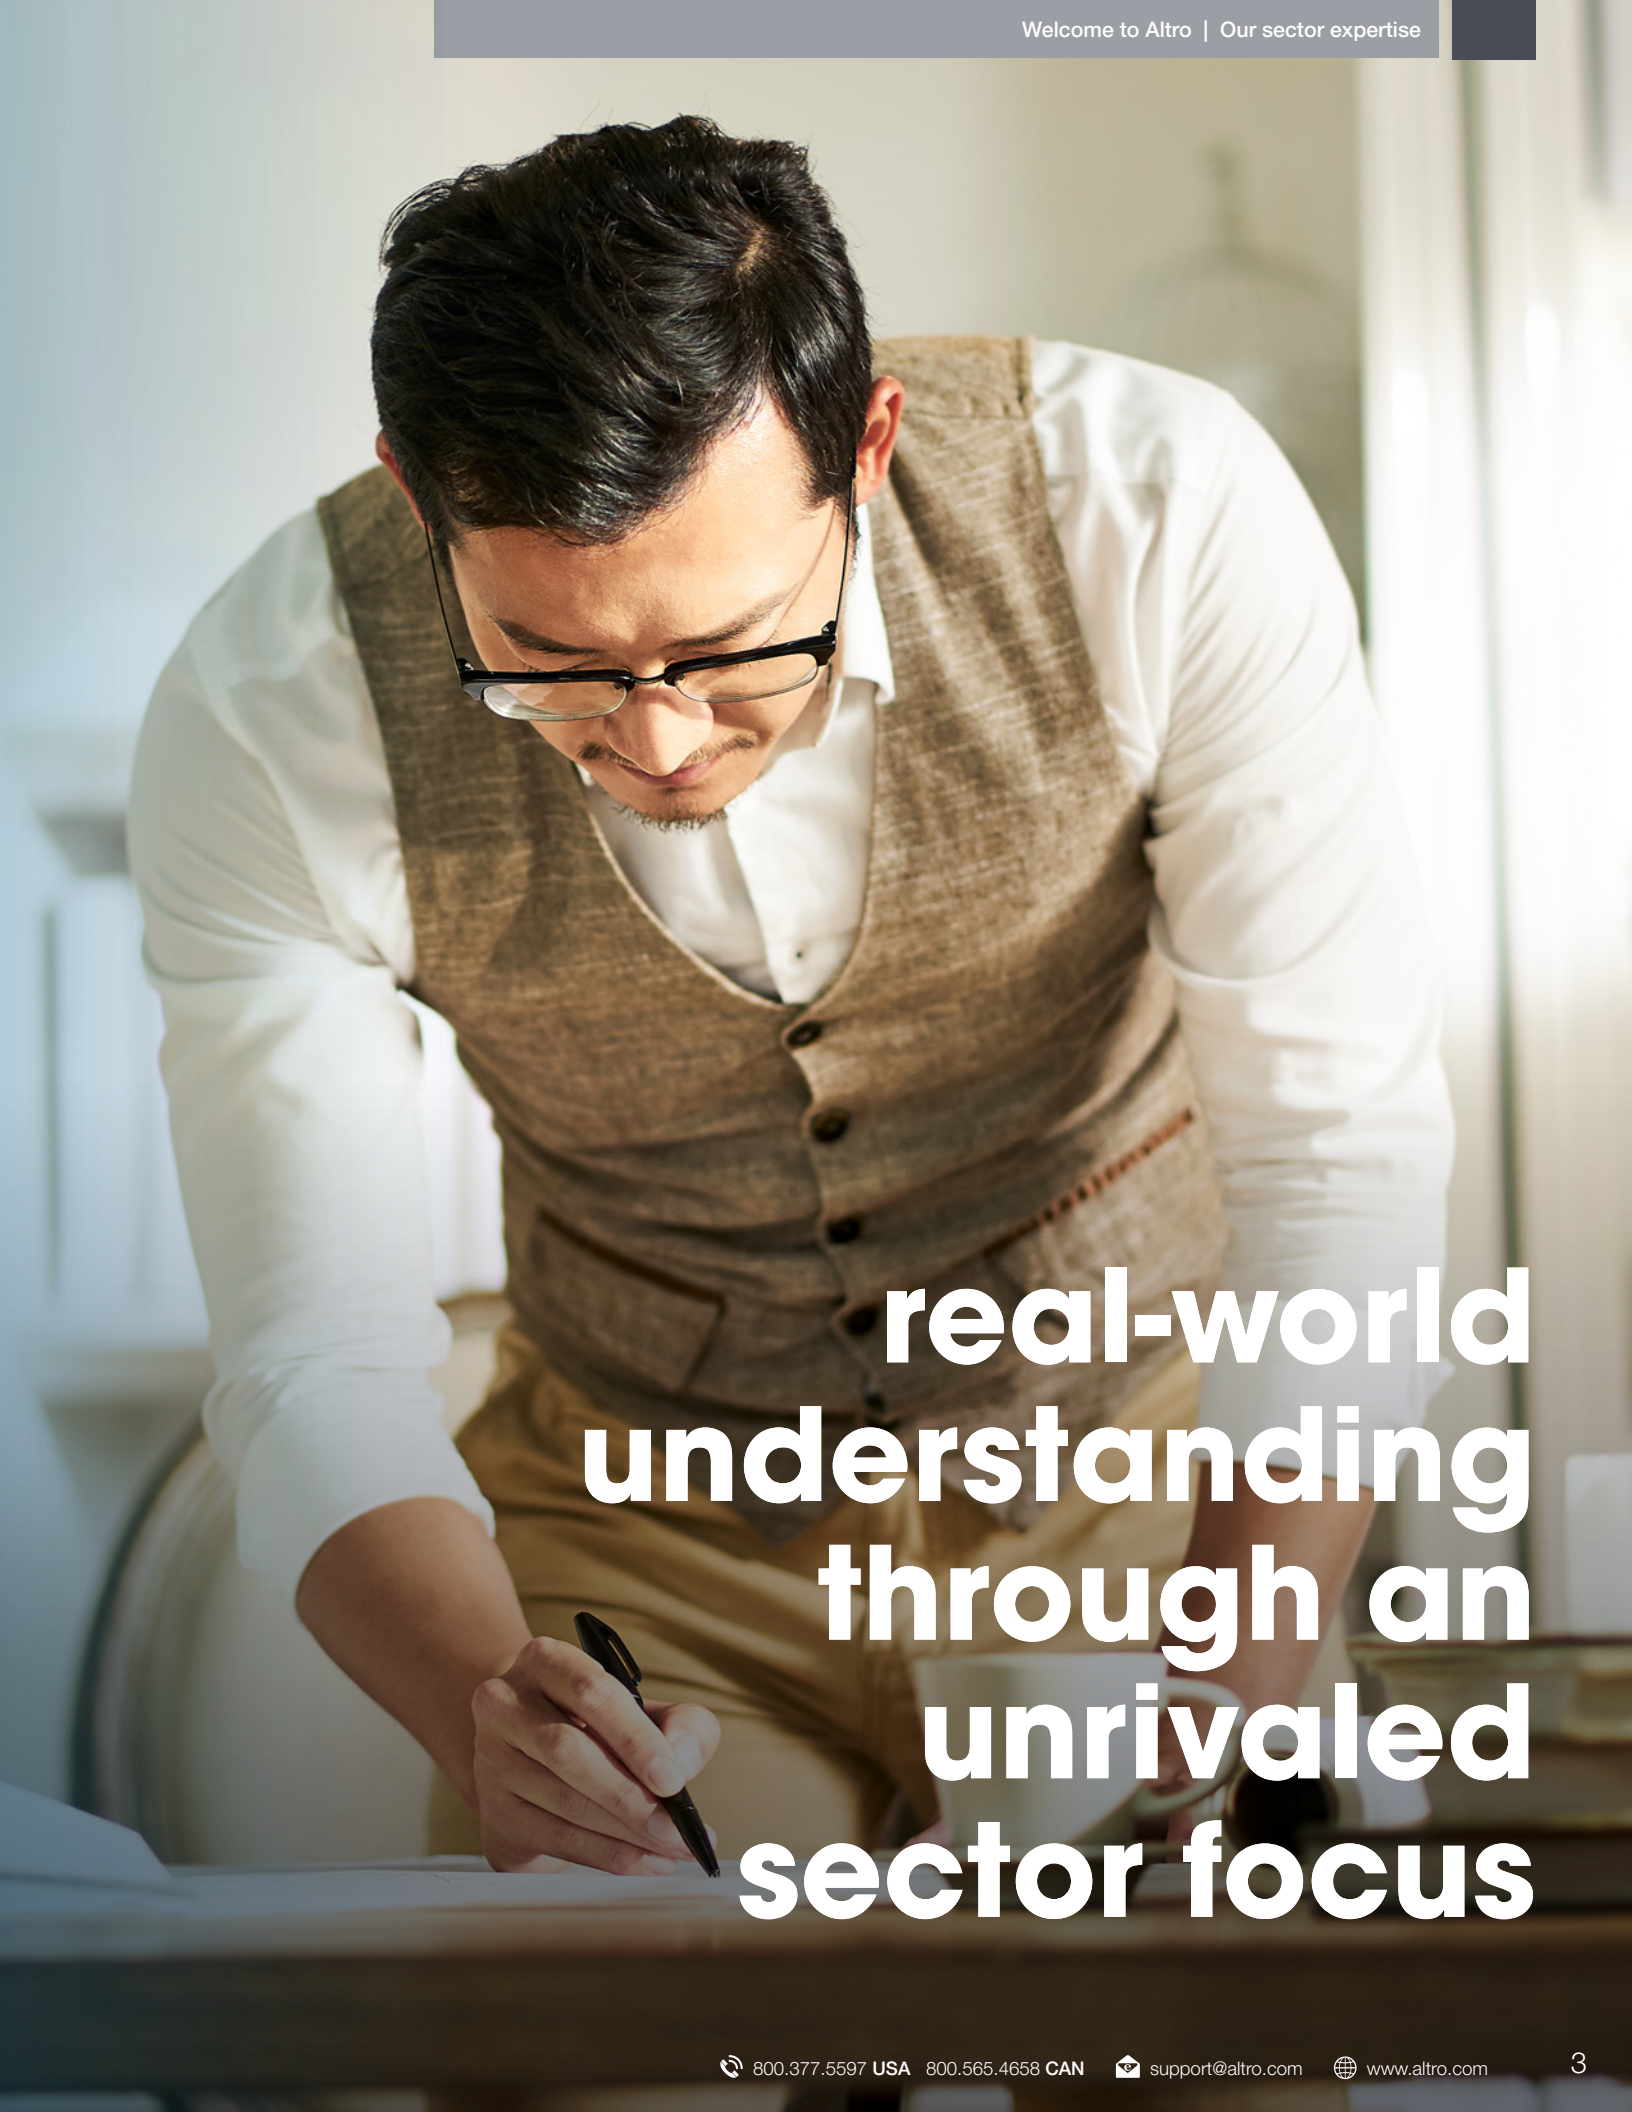A man with dark hair and glasses, wearing a white long-sleeved shirt and a brown textured vest, is leaning over a desk. He is holding a black pen and writing on a white document. The background is softly blurred, showing what appears to be a window with light coming through. The overall tone is professional and focused.

**real-world
understanding
through an
unrivalled
sector focus**



Healthcare

We've pioneered a range of solutions to give you the confidence to create the type of environment you really want. Whether it's a large hospital, care home or community healthcare center, you can provide inspirational rooms that don't just perform and look good, but also take hygiene and the safety of your people, patients and residents seriously.

Typical applications

Hospitals
 Operating and surgical areas
 Emergency rooms
 Behavioral and mental health
 Patient rooms
 Patient restrooms
 Patient showers
 Corridors
 Kitchens
 Cafeterias
 Lobbies
 Administration offices


Recommended products (not inclusive)



Altro Symphonia



Altro Wood



Altro Whiterock




Altro Whiterock PopArt




Hospitality

Whether it's a commercial kitchen, an office cafeteria, a five-star hotel or a chain of restaurants and cafes, safety, hygiene, ease and speed of installation and cost are all top priorities when designing for the hospitality sector.

Recommended products (not inclusive)



Altro Stronghold 30

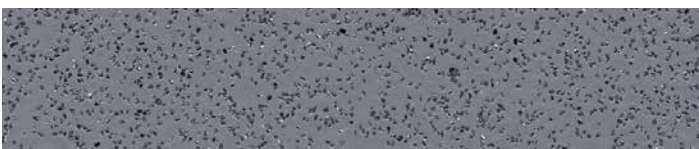

Altro Classic 25



Altro Puraguard




Senior living

It's vital to understand the many ways that aging affects health and the perceived physical environment. Interior finishes should be utilized that enhance the wellbeing of frail and aging residents.

Recommended products (not inclusive)



Altro Wood Comfort

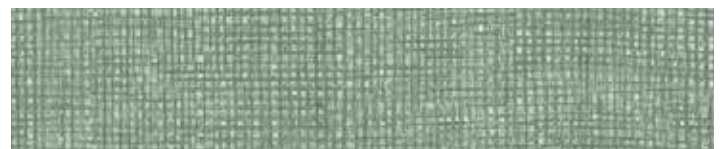

Altro Orchestra



Altro Aquarius



Altro Whiterock Matte



Education

We believe that learning environments are some of the most important places there are, and the way they function is just as important as the way they look. Schools, colleges and universities need inspiring, durable, attractive and hygienic wall and flooring products that can cope with the demands of growing up.

Recommended products (not inclusive)



Altro Quartz Tile



Altro Dolce Tile




Altro Lavencia LVT



Manufacturing

Materials specified for industrial and mass production areas are required to prioritize both durability and the wellbeing of everyone involved. These environments adhere to stringent health and safety guidelines that dictate nearly every aspect of their design.

Recommended products (not inclusive)



Altro Operetta



Altro Symphonia



Altro Whiterock



Transport

Our Altro Transflor range of safety flooring is engineered to give you lightweight solutions without compromising on safety, durability, or ease of maintenance.



Housing

The way a home looks is just as important as how it functions. Welcoming, aesthetically pleasing, noise reducing finishes that are durable and easy to clean are a perfect solution for multi-family housing.



Retail + offices

How people feel when they're at work or when they shop with you can affect your business more than ever, especially if you don't have an environment people enjoy being in.



Prisons + defense

For containment and holding areas and walkways with heavy traffic, our products offer high strength, stain resistance and reduced dirt retention making them easy to clean and maintain.



Leisure

When your venues welcome masses of people every year, you need a robust floor and wall cladding solution, capable of doing exactly the right job in the right place.



Food + drink production

We know that a safe, efficient and hygienic facility is a vital part of the production process, which is why our specialized flooring and wall solutions are ideal.

Our sustainability vision: Building better futures

Here at Altro, we are committed to reducing our carbon footprint, increasing our sustainability activities, and advancing our environmental, social and ethical performance.

To demonstrate our commitment to reducing our carbon footprint and increasing our sustainability actions, we are working towards key targets by 2030. These targets are:

Reducing our carbon footprint

For all our facilities, becoming carbon neutral for scope 1 and 2 through a combination of increased efficiencies and renewable energy.

Corporate social responsibility

To have a positive impact on society as a whole and the communities we work in.

Recycling

To offer circular economy solutions and provide adhesive-free options in all our floor and wall product ranges.

Formulation

To achieve 30% recycled and bio-sourced content in our product portfolio.



Off cuts and scrap Altro flooring can be 100% recycled directly at our manufacturing facility.

One of the core fundamentals of LEED is product transparency. Specifiers want to know which ingredients are in the products they use and if they are hazardous to human or environmental health. Altro supports this initiative and has our product transparency documents, EPDs and HPDs, publicly available on our website.

Discover more at [altro.com](https://www.altro.com)

LEED facts		
LEED v4		
This product may help contribute to the following credits		
Altro floors		8
	Materials and resources Contains recycled content	1
	Materials and resources Renewable bio-based content	1
	Materials and resources Environmental product declaration	1
	Materials and resources Health product declaration	1
	Environmental quality Low emitting materials, flooring	3
	Environmental quality Low emitting materials, adhesives	1

Discover more of our sustainability story and credentials at [altro.com](https://www.altro.com)

Our mission to build better futures

We are committed to develop and innovate from within, reducing our carbon impact, supporting the wellbeing of our international teams and improving the quality of life for more vulnerable communities around the world.



2% of all global profits annually are donated to the Altro Foundation.



In 2021, Altro had 40 employees with over 25 years' service.



Altro employees can spend one day per year providing voluntary support to local charities.



In 2020, Altro championed the Starfish Greathearts Foundation to support the Wellness Wagon Mobile Clinic.

Reducing our carbon footprint

Recofloor have collected **6,400 tons** of waste vinyl flooring resulting in


7,038 CO₂ saving

109 tons of carbon saved by diverting waste from landfill

carbon saved by diverting waste from landfill

99% reduction in our manufacturing water consumption since 2000

100% certified green electricity provided by our UK energy provider



100% recyclable post-consumer

50% time-saving, 35% cost-saving

altro adhesive-free

Trusted for over 10 years

0% to landfill, 100% clean waste

Our safety flooring is wrapped using 100% recyclable packaging

Recycling

Co-founder of Recofloor recycling scheme



zero waste to landfill at our UK manufacturing sites

Offcuts of Altro walls are recyclable **100%**

Founder of Recowall recycling scheme



Offcuts of Altro PVC-based products are **100% recyclable**



How can Altro offer industry-leading cleanability and maintain underfoot safety?

Altro Easyclean™ Technology



Altro Easyclean Technology is unique in the marketplace as it is incorporated throughout the flooring while it is manufactured rather than applied as a surface finish. This allows Altro flooring to benefit from enhanced cleaning and maintenance while still allowing our products to maintain the slip-resistant properties Altro is known for.


The Altro Easyclean formula is matched to the floor during manufacturing to ensure slip resistance is a top priority in high slip risk areas. For example, smooth floors like Altro Cantata and Altro Symphonia will have more Altro Easyclean than a robust safety floor like Altro Stronghold 30.

Altro Easyclean offers

- Industry-leading ease of cleaning
- Cleaning and maintenance cost savings
- Sustained long-term slip resistance + durability
- Low dirt pick-up qualities + improved color retention

How have we done it?


- Varying degrees of Altro Easyclean based on safety, slip-resistant and smooth flooring categories — adding a superficial PUR topcoat wouldn't be appropriate on a safety floor!
- Incorporated Altro Easyclean throughout to ensure unparalleled performance for the life of the product.
- Slip-resistant particles throughout the product for guaranteed slip resistance, regardless of degree of wear.

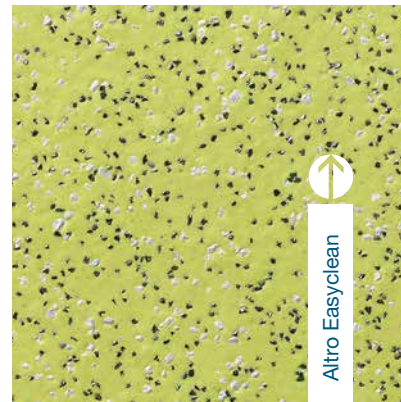

Safety flooring + level of
Altro Easyclean



Slip-resistant flooring + level of
Altro Easyclean

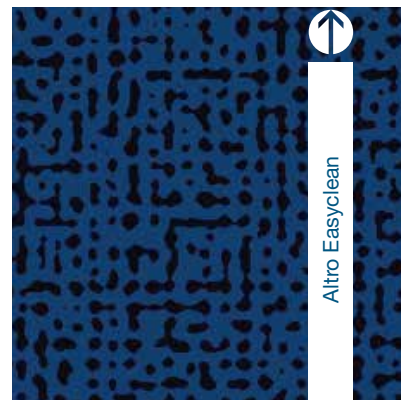


Smooth flooring + level of
Altro Easyclean

Altro ShieldTec technology



Revolutionary advancements in the manufacturing process of Altro Symphonia have now allowed us to produce our most stain-resistant technology to date. Altro ShieldTec, teamed with our tried-and-true Altro Easyclean Technology, will provide you with industry-leading commercial flooring performance. **Learn more by scanning the QR code!**



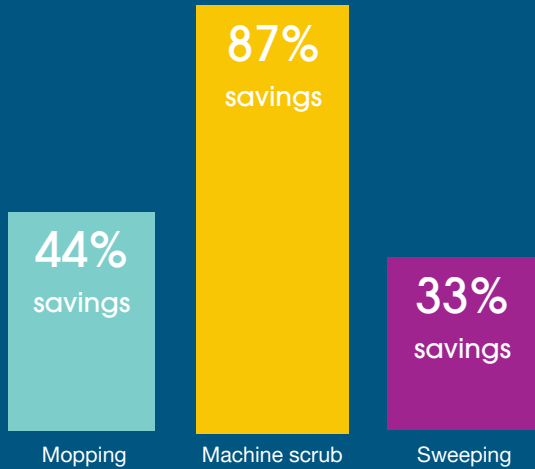

Maintenance cost savings analysis



Graph shows the percent saved with flooring treated with Altro Easyclean vs. a traditional non-PUR safety flooring. Percentages are based on a test area of 100m² over the span of one year. As most cleaning routines are a combination of manual mopping, machine scrubbing and sweeping, the average percentage saved when choosing a floor treated with Altro Easyclean may be up to 60% over its life cycle.

See below for an approximated cost breakdown. Testing was carried out by a third-party independent provider Cleaning Research International.

	Altro Easyclean treated floor	Non PUR treated competitor floor
Sweeping	\$8.27 - 5x week	\$12.41 - 5x week
Mopping	\$3.33 - 5x week	\$5.99 - 3x week
Machine scrub	\$1.29 - 1x month	\$10.26 - 2x week
15 year cost	\$10,054.31	\$22,329.39

Savings of \$820 year / \$12,275 over 15 year lifetime - 55%

Some facility managers find that they no longer require machine scrubbing with adequate manual cleaning programs and Altro Easyclean flooring. This increases savings further as shown below.

	Altro Easyclean treated floor	Non PUR treated competitor floor
Sweeping	\$8.27 - 5x week	\$12.41 - 5x week
Mopping	\$3.33 - 5x week	\$5.99 - 3x week
Machine scrub		\$10.26 - 2x week
15 year cost	\$9,048.00	\$22,329.39

Savings of \$887 year / \$13,281 over 15 year lifetime - 60%

Costs were accurate at the time of third party testing.

Dirt pick-up and color retention


Independent test findings, indicated on the graph below, show the level of dirt pick-up of Altro Easyclean compared with two competitor safety flooring products also containing a PUR treatment.

Test procedure and results

- The color of each safety flooring sample was recorded using a Chroma Meter II reflectance spectrophotometer.
- All samples were adhered to the inside of the Hexapod Tumbler to simulate normal wear conditions.
- The tumbler was automatically rotated for 30 mins.
- The safety flooring samples were removed.
- Each sample was vacuum cleaned after testing, before the degree of soiling was determined.
- Color brightness was re-measured in six random areas of each specimen to establish dirt pick-up and color retention.

Tests prove that flooring treated with Altro Easyclean picks up less dirt and therefore retains its color better and longer than competitor PUR treated safety flooring. Due to the patented surface construction of Altro flooring with Altro Easyclean, dirt does not collect around particles.

Loss of brightness test results

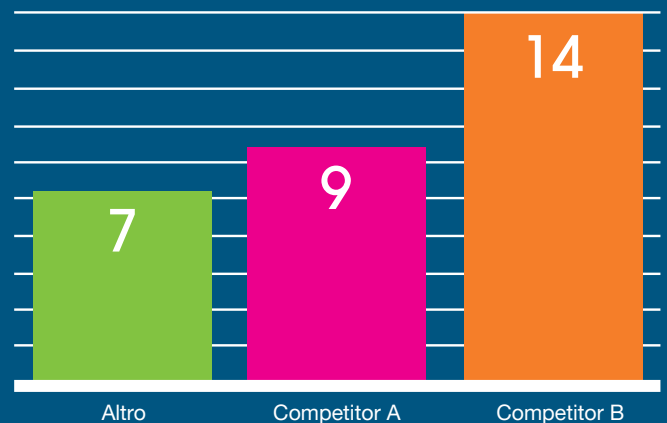

Figures above indicate the degree of soiling remaining on the sample. The lower the number, the better color retention.



Luxury resort, Miraval Berkshires, chose Altro Stronghold 30 Torch and Altro Puraguard Salt for much needed kitchen renovations.

safety flooring

Areas like busy commercial kitchens and wet environments have additional contaminants, which are continuously present, and spillages cannot be avoided. The likelihood of a slip is significantly increased, raising the slip risk level to *extremely high*. These locations, often riddled with contaminants such as grease, oil, shampoo and shower gels demand safety flooring that retains a slip risk of one-in-a-million.

Safety flooring

Why safety flooring?	14
Assess your slip-risk	15
Testing and measuring slip resistance	16
Safety product offerings	18
Technical chart	29




Before photo!

Why safety flooring?

Our safety flooring doesn't just protect the people who use it. It also protects those responsible for the health and safety of their employees and visitors. Our patented, aggregated construction of high-grade vinyl ensures a durable surface that is slip-resistant for the life of the floor.

Simply put, our slip resistance doesn't wear down like our competitors. Altro will maintain its integrity well past the warranty date. We've even tested flooring over 25 years old that still meets and exceeds today's measures.

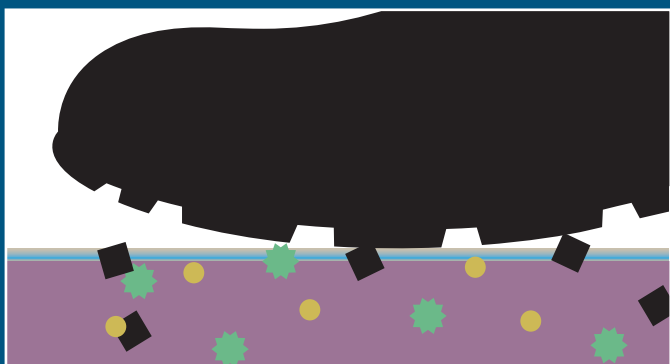

The pressure created by walking over safety flooring causes aggregates in the flooring to push up and rub against the shoe, creating friction. Because of this, Altro safety flooring remains slip-resistant, even when the surface profile is wet.

Typical safety applications

- Commercial kitchens
- Dishwashing areas
- Walk-in coolers and freezers
- Food and drink manufacturing
- Back-of-house and staff service areas
- Manufacturing and industrial areas
- Showers and bathing areas
- Areas adjacent to wet areas
- Areas requiring extreme durability
- Hydrotherapy pool + spa surrounds

When do you need safety flooring?

Assess your level of risk.

It is designers, specifiers and end-users' responsibility to ensure flooring is fit for purpose, and it's part of our role here at Altro to help make this process easy. Our flooring is separated into three categories: safety, slip-resistant and smooth. These categories have been created to help assist you in specifying the floor that is right for the application type and any contaminants that may be present on a regular basis.



Are contaminants present?

Areas that commonly see many contaminants such as oils, soaps, grease or constant spillages of water require extra care when selecting flooring. We recommend Altro safety flooring that meets R12 or R11 levels of slip resistance for these areas. General use areas that are not riddled with contaminants will be secure with our slip-resistant or smooth offerings.

Typical areas with contaminants:

- Commercial kitchens
- Dish washing area
- Food + beverage service
- Showers
- Locker rooms
- Hydrotherapy pool + spa surrounds
- Restrooms

Risk of slips	Altro R12 PTV ≥55 (Altro Stronghold 30)	Altro R11 PTV ≥45 (Altro Aquarius + Altro Classic 25)	Altro R10 PTV ≥36 (Slip-resistant floorings)
Water	1-in-a-million	1-in-a-million	1-in-a-million
Vegetable oil	1-in-a-million	1-in-100,000	1-in-20
Greasy water	1-in-a-million	1-in-100,000	1-in-20
Shower gel	1-in-a-million	1-in-a-million	1-in-20
Shampoo	1-in-a-million	1-in-a-million	1-in-20
Conditioner	1-in-a-million	1-in-a-million	1-in-20
Milk	1-in-a-million	1-in-a-million	1-in-a-million
Flour	1-in-a-million	1-in-a-million	1-in-a-million

By choosing wisely, you can reduce the risks of slips and falls as much as one-in-a-million.

Testing and measuring slip resistance

As the inventor of safety flooring, we take slip resistance seriously! Many manufacturers will develop flooring just to meet ADA or OSHA requirements, but at Altro, we go above and beyond what's legally required, to deliver safety flooring you can count on for the product's lifetime.

Our ranges are rigorously tested for slip resistance values using multiple techniques from around the globe.

We don't just meet existing test standards, we're raising the bar and pioneering new, rigorous testing protocols like the Pedatron test (shown right).

Static Coefficient of Friction ASTM D2047

**.92D
.88W
SCOF**

A device called the James Machine pulls a small weighted sled over the floor surface. The result is the measurement of friction the surface creates. This is the accepted standard measure in North America.

While this standard only requires testing over dry conditions, at Altro we test our flooring in both dry and wet conditions. It's a pioneering approach that gives you complete peace of mind.

Dynamic Coefficient of Friction ANSI/NFSI B101.3-2012

**.74
DCOF**

Testing for the Dynamic Coefficient of Friction (DCoF) is conducted through the use of a Digital Tribometer.

The device passes five times in a certain direction over a designated test area for a combined total of 20 passes while collecting readings that measure slip resistance potential.

While other options are available, this is one of the most popular test methods in North America for measuring the Wet Dynamic Coefficient of Friction for common hard-surface floor materials.

TRRL Pendulum Test ASTM E303 / BS7976

**Pendulum test
PTV
≥55**

Popular in the UK, the pendulum test is the only portable test standard, allowing for on-site tests. The test incorporates a rubber shoe heel that sweeps over a set of flooring in a controlled manner and produces a pendulum value measuring the potential to slip.

A result of ≤ 25 is very high risk and a result of ≥ 36 and above is low risk. Altro safety flooring exceeds the ≥ 36 rating indicating the lowest potential for slip.

Ramp Test DIN 51130

R₁₂

This standard, popular in Europe, uses test subjects who walk backward and forward on an angled ramp in a controlled manner over a flooring sample contaminated with water, oil, or other liquids. Results are achieved when the test subject loses balance and falls, and those results are called an R value.

The range is from R9-R13, with R9 being the accepted minimum for use of tile in public areas.



This “Pedatron” machine gives an accurate representation of surface wear in situ. In hours we can reproduce months of pedestrian foot traffic. This allows us to test, and re-test slip resistance in intervals throughout the projected life span.



Altro Stronghold™ 30

1 in a
million
for life

.92D
.88W
SCOF

.74
DCOF

Pendulum test
PTV
≥55

R₁₂



Miraval Berkshires

Water underfoot is treacherous enough – add grease, oils and fats, and you’ve got a dangerous environment. For commercial kitchens, food preparation and back-of-house service areas, it’s essential to select flooring that will help staff continue their job safely.

Altro Stronghold 30 achieves Altro’s highest slip resistance rating and is designed to minimize risk in wet and greasy conditions for the lifetime of the flooring. In addition to keeping staff safe from slips, it also helps reduce their fatigue thanks to its 3mm thickness, providing ample noise reduction and comfort underfoot.

Typical applications

Commercial kitchens, food preparation, back-of-house service areas, walk-in coolers and freezers

Features + benefits

- Achieves highest level of slip resistance
- Risk of slipping is one-in-a-million even with contaminants present
- Heat-welded seams for better hygiene
- Static load limit exceeds 2000psi
- FDA / USDA / CFIA / HACCP compliant
- -22°F / -30°C lowest temperature rating
- Installs faster than quarry tile and epoxy
- Independent Halo tests indicate 10x lower bacteria count than quarry tile
- Fungi and mold-resistant, achieves zero growth after 21 days



Looks great with

- Altro Puraguard
- Altro Classic 25
- Altro Atlas 40
- Altro Lavencia
- Altro Wood Acoustic
- All Altro wall options



Sustainability

- 10% post-consumer recycled content
- O-phthalate free
- Contains bio-based content
- FloorScore certified and low VOC compliant
- Contributes to LEED

More content online www.altro.com



Samples

Experience has shown that printing cannot reproduce colors accurately. If color choice is critical, please request a sample of the material.

Samples are available on altro.com or through Material Bank.




Abyss
K3001
WR100 / AM100

LRV 7




Cannon
K30911
WR101 / AM72

LRV 11




Dolphin
K3010
WR86 / AM86

LRV 21




Pâté
K30504
WR61 / AM239

LRV 23




Consommé
K30502
WR206 / AM82

LRV 15




Tundra
K30500
WR153 / AM239

LRV 17




Biscuit
K30907
WR146 / AM20

LRV 30




Russet
K30262
WR41 / AM41

LRV 14




Torch
K30913
WR278 / AM42

LRV 16




Sear
K30503
WR83 / AM83

LRV 15




Midnight
K30421
WR72 / AM72

LRV 11




Skyline
K30332
WR52 / AM52

LRV 24




Surf
K30412
WR71 / AM71

LRV 20



Braise
K30507
WR575 / AM223

LRV 9

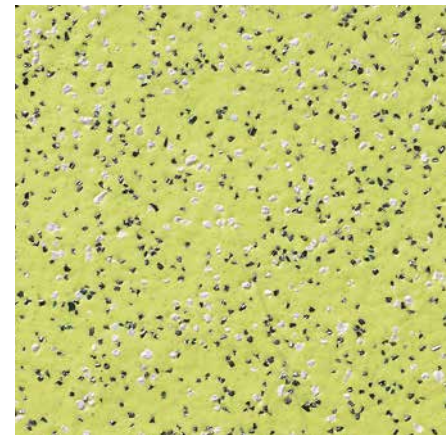

Color name → Lime
SKU # → K3086
WR = Weldrod
AM = Mastic

LRV 42

LRV
Light
reflectance
value



LRV = Light reflectance value

Please keep LRVs in mind when selecting flooring for areas with dementia and Alzheimer's patients, seniors or individuals with poor vision.



Color matched weldrods (WR) and mastics (AM) are available. You'll find their product codes under product SKUs.



6'7" x 49' 2m x 15m
Format SHEET
Thickness 3mm .12"

Altro Classic™ 25

1 in a
million
for Life.90D
1.0W
SCoF.60
DCoFPendulum test
PTV
≥45R₁₁

Düsseldorf Exhibition Center Cafeteria



Classic by name, classic by nature – Altro Classic 25 was the first ever safety flooring. It has been tried and trusted for over 60 years, and its traditional, industrial look is still popular today.

Altro Classic 25 provides lasting slip resistance, durability and abrasion resistance, making it ideal for use in heavy traffic areas – particularly commercial kitchens.

Altro Classic 25 is easy to clean and maintain and is available in practical, dirt-hiding shades. It achieves an R11 slip resistance rating. Altro Stronghold 30 and Altro Atlas 40 are also great flooring options for commercial kitchens depending on your individual needs.

Typical applications

Food preparation and service areas, walk-in coolers, areas with heavy traffic



Looks great with

- Altro Puraguard
- Altro Stronghold 30
- Altro Atlas 40
- Altro Walkway 20
- Altro Lavencia
- Altro Wood Comfort
- All Altro wall options



Sustainability

- 10% post-consumer recycled content
- O-phthalate free
- Contains bio-based content
- FloorScore certified and low VOC compliant
- Contributes to LEED

More content online www.altro.com




Samples

Experience has shown that printing cannot reproduce colors accurately. If color choice is critical, please request a sample of the material.


Samples are available on altro.com or through Material Bank.

Featured in image left



Mushroom
X2542R11
WR24 / AM27

LRV 32




Truffle
X2545R11
WR153 / AM239

LRV 17




Walnut
X2586R11
WR62 / AM62

LRV 10




Quarry Red
X2560R11
WR42 / AM42

LRV 13




Pewter Grey
X2539R11
WR81 / AM81

LRV 26



Graphite
X2546R11
WR86 / AM86

LRV 21




Whisper
X2548R11
WR354 / AM84

LRV 24




Blackberry
X2547R11
WR100 / AM100

LRV 7




Blue
X2541R11
WR71 / AM71

LRV 20




Aster
X2549R11
WR286 / AM286

LRV 17



Legend
X2544R11
WR231 / AM73

LRV 10

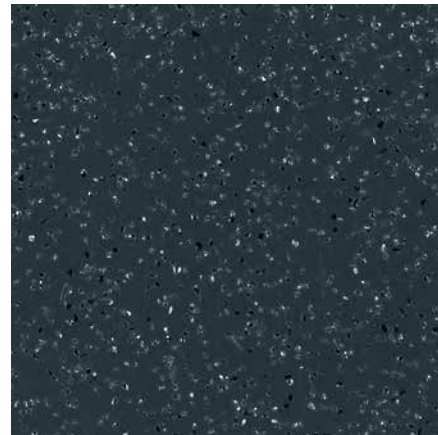

Anvil
X2594R11
WR101 / AM72

LRV 11



LRV = Light reflectance value

Please keep LRVs in mind when selecting flooring for areas with dementia and Alzheimer's patients, seniors or individuals with poor vision.



Color matched weldrods (WR) and mastics (AM) are available. You'll find their product codes under product SKUs.



CEPHEUS BY
SCS Global Services

6'7" x 65'5"
2m x 20m
Format SHEET
Thickness 2.5mm .10"

Altro Atlas™ 40

Fox Meadows Creamery



Altro Atlas 40 is our most robust safety flooring, maintaining its integrity even when superficially punctured by studs or spikes. It's well suited to heavy-duty industrial use and sports changing rooms that see cleat traffic regularly.

Hard-wearing, stable and resistant to mechanical damage and chemicals, Altro Atlas 40 provides long-term durability and slip resistance, and is easy to clean and maintain.

Typical applications

Industrial areas exposed to heavy wheeled traffic, pallet trucks, forklifts, chemical processing, manufacturing, 24/7 commercial kitchens

Features + benefits

- Extremely durable
- Maintains surface integrity even when superficially punctured
- Well suited for commercial kitchen and industrial applications
- Resistant to mechanical damage and chemicals
- 4.0mm thickness provides ample underfoot comfort
- Easy to clean and maintain
- FloorScore Certified / Low VOCs



Looks great with

- Altro Puraguard
- Altro Stronghold 30
- Altro Classic 25
- Altro Reliance 25
- Altro Wood Acoustic
- All Altro wall options



Sustainability

- 10% post-consumer recycled content
- O-phthalate free
- Contains bio-based content
- FloorScore certified and low VOC compliant
- Contributes to LEED


More content online www.altro.com



Samples


Experience has shown that printing cannot reproduce colors accurately. If color choice is critical, please request a sample of the material.

Samples are available on altro.com or through Material Bank.

1 in a
million
for life.70D
.70W
SCOF.57
DCOFPendulum test
PTV
≥36R₁₀

Anvil
X4094
WR101 / AM72

LRV 11



Quarry Red
X4060
WR42 / AM42


LRV 13



Walnut
X4086
WR62 / AM62

LRV 10

Featured in image above

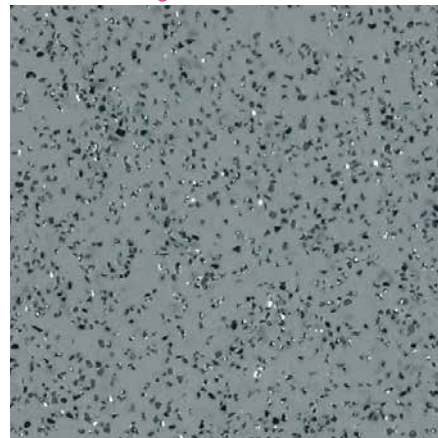

Pewter Grey
X4039
WR81 / AM81

LRV 26



LRV = Light reflectance value

Please keep LRVs in mind when selecting flooring for areas with dementia and Alzheimer's patients, seniors or individuals with poor vision.



Color matched weldrods (WR) and mastics (AM) are available. You'll find their product codes under product SKUs.


CERTIFIED BY
SGS Global Services

6'7" x 40' 2m x 12.2m
Format SHEET
Thickness 4mm .16"

Altro Aquarius™

1 in a
million
for life.88D
1.03W
SCoF.65
DCoFPendulum test
PTV
≥50

R11

Nethercrest Nursing Home



Altro Aquarius was developed for lasting performance in wet and dry environments, shoes or barefoot. This 2mm safety floor has been extensively tested on a variety of shoe types (and bare feet) to ensure peak performance in a host of environments – bathrooms, changing areas, hydrotherapy pool surrounds. Anywhere you can expect a combination of wet and dry floors.

Altro Easyclean technology puts this range at the forefront of safety floor cleanability.

Typical applications

Bathrooms, showers, changing rooms, hydrotherapy pool surrounds, saunas

Features + benefits

- Optimum slip resistance in wet and dry environments, shoes or barefoot
- Achieves R11 slip resistance rating and SCoF of .88 dry, 1.03 wet
- Extensively tested on a variety of shoe types to ensure top performance
- Ideal for bathrooms, showers, changing areas and hydrotherapy pool surrounds
- Pairs with select Altro Walkway 20 colors for seamless coordination from wet rooms to general areas
- FloorScore Certified / Low VOCs



Looks great with

- Altro Whiterock
- Altro Wood
- Altro Walkway 20
- Altro Symphonia
- Altro Orchestra
- Altro Operetta
- All Altro wall options



Sustainability

- 10% post-consumer recycled content
- O-phthalate free
- Contains bio-based content
- FloorScore certified and low VOC compliant
- Contributes to LEED


More content online www.altro.com



Samples


Experience has shown that printing cannot reproduce colors accurately. If color choice is critical, please request a sample of the material.

Samples are available on altro.com or through Material Bank.




Puffin
AQI2005
WR287 / AM79

LRV 46




Cygnet
AQ2004
WR287 / AM79

LRV 46



Walrus
AQ2007
WR261 / AM81

LRV 29



Tern
AQI2008
WR261 / AM81

LRV 31



Hippo
AQI2013
WR301 / AM82


LRV 11

Featured in image left



Lighthouse
PX2001
WR291 / AM01

LRV 70




Swan
AQI2012
WR291 / AM01

LRV 75




Gosling
AQI2023
WR369 / AM369

LRV 59




Sea Snail
AQI2024
WR370 / AM370

LRV 50



Curlew
AQI2019
WR364 / AM335

LRV 50



Terrapin
AQI2009
WR289 / AM265

LRV 40



Sealion
AQI2018
WR363 / AM265

LRV 37



Sandpiper
AQI2017
WR362 / AM20

LRV 41

Additional colors of Altro Aquarius on next pages



LRV = Light reflectance value

Please keep LRVs in mind when selecting flooring for areas with dementia and Alzheimer's patients, seniors or individuals with poor vision.



Color matched weldrods (WR) and mastics (AM) are available. You'll find their product codes under product SKUs.



CERTIFIED BY
FSC Global Services

6'7" x 65'5"
2m x 20m

Format
SHEET

Thickness
2mm | .08"



Abalone
AQI2028
WR554 / AM484

LRV 48



Anchovy
AQI2026
WR554 / AM484

LRV 48




Barnacle
AQ2030
WR552 / AM20

LRV 48



Grouper
AQI2029
WR553 / AM347

LRV 32



Trumpetfish
AQI2027
WR553 / AM347

LRV 32




Iguana
AQ2021
WR297 / AM20

LRV 41




Otter
AQI2006
WR290 / AM239

LRV 26




Blue Tang
AQI2025
WR551 / AM396

LRV 59



Treefrog
AQI2003
WR293 / AM271

LRV 33




Blue Penguin
AQI2002
WR288 / AM71

LRV 24



Newt
AQ2022
WR368 / AM368

LRV 10



Anchor
PX2008
WR391 / AM82

LRV 16



Shower Transition Trims

Available in four colors that were selected to complement and contrast most of the colors within the Altro Aquarius palette.



Cream



Light gray



Medium gray



Light brown



Looks great with

- Altro Whiterock
- Altro Wood
- Altro Walkway 20
- Altro Symphonia
- Altro Orchestra
- Altro Operetta
- All Altro wall options



Sustainability

- 10% post-consumer recycled content
- O-phthalate free
- Contains bio-based content
- FloorScore certified and low VOC compliant
- Contributes to LEED


More content online www.altro.com



Samples

Experience has shown that printing cannot reproduce colors accurately. If color choice is critical, please request a sample of the material.

Samples are available on altro.com or through Material Bank.



**Cuttlefish
PX2002**
WR385 / AM385

LRV 50




**Breakwater
PX2003**
WR386 / AM20

LRV 42




**Shoreline
PX2006**
WR389 / AM389

LRV 38



**Windbreak
PX2016**
WR399 / AM399

LRV 38



**Sea Urchin
PX2014**
WR397 / AM397

LRV 34



**Fisherman
PX2009**
WR392 / AM392

LRV 48




**Driftwood
PX2004**
WR387 / AM387

LRV 32




**Jetty
SB2017**
WR418 / AM239

LRV 23




**Deckchair
PX2013**
WR396 / AM396

LRV 50



**Houseboat
PX2015**
WR398 / AM398

LRV 25




**Starfish
PX2010**
WR393 / AM393

LRV 21



**Jellyfish
PX2005**
WR388 / AM388

LRV 46



**Porthole
PX2007**
WR390 / AM390

LRV 30



LRV = Light reflectance value

Please keep LRVs in mind when selecting flooring for areas with dementia and Alzheimer's patients, seniors or individuals with poor vision.



Color matched weldrods (WR) and mastics (AM) are available. You'll find their product codes under product SKUs.



CERTIFIED BY
FSC Global Services

6'7" x 65'5"
2m x 20m

Format
SHEET

Thickness
2mm | .08"



800.377.5597 USA 800.565.4658 CAN



support@altro.com



www.altro.com

Altro Marine™ 20

Racing Santander



Make a splash with Altro Marine 20! Whether you're playing poolside or stepping into the shower, enjoy peace of mind knowing that the risk of slipping is minimized with Altro Marine 20 safety flooring underfoot.

Its dimpled surface ensures durable, long-term slip resistance and comfort in barefoot areas like showers, pool surrounds, spa decks, and more.

Altro Marine 20 is recommended in wet barefoot environments. For areas that have a combination of wet and dry surfaces and receive both barefoot and shoe traffic, Altro recommends the use of Altro Aquarius.

Typical applications

Wet barefoot environments, showers, pool surrounds, spa decks, locker rooms

Features + benefits

- Optimal slip-resistance for bare feet in wet areas
- Maintains safety even with contaminants present
- Underfoot comfort
- Durable, hard-wearing construction
- Create an integrated, watertight solution with our wall systems
- FloorScore Certified / Low VOCs
- ICC-ES Product Certified



Looks great with

- Altro Walkway 20
- Altro Whiterock
- Altro Whiterock Matte
- Altro Whiterock Chameleon
- Altro Whiterock wall designs



Sustainability

- 10% post-consumer recycled content
- O-phthalate free
- Contains bio-based content
- FloorScore certified and low VOC compliant
- Contributes to LEED

More content online www.altro.com



Samples

Experience has shown that printing cannot reproduce colors accurately. If color choice is critical, please request a sample of the material.

Samples are available on altro.com or through Material Bank.

1 in a
million
for life

.88D
1.03W
SCOF

.55
DCOF

R₁₀




Featured in image above




Cascade
IPT20809
WR105 / AM01

LRV 71



Reef
T20801
WR20 / AM20

LRV 41




Seagrass
IPT20814
WR137 / AM137

LRV 37



Rainfall
IPT20810
WR135 / AM135

LRV 43



Tide
IPT20808
WR71 / AM71

LRV 21



LRV = Light reflectance value

Please keep LRVs in mind when selecting flooring for areas with dementia and Alzheimer's patients, seniors or individuals with poor vision.



Color matched weldrods (WR) and mastics (AM) are available. You'll find their product codes under product SKUs.



CERTIFIED BY
SCS Global Services

6'7" x 65'5"
2m x 20m
Format SHEET
Thickness 2mm .08"



	Altro Stronghold 30	Altro Classic 25	Altro Atlas 40	Altro Aquarius	Altro Marine 20
Format	sheet	sheet	sheet	sheet	sheet
Thickness	3mm .12"	2.5mm .10"	4mm .16"	2mm .08"	2mm .08"
Width	2m 6'7"	2m 6'7"	2m 6'7"	2m 6'7"	2m 6'7"
Length	15m 49'	20m 65'5"	12.2m 40'	20m 65'5"	20m 65'5"
Weight	7.19 lbs /yd ²	5.89 lbs /yd ²	9.95 lbs /yd ²	4.79 lbs /yd ²	5.16 lbs /yd ²
Warranty	12 years	12 years	15 years	10 years	10 years
Slip resistance					
ANSI/NFSI B101.3	.74 DCoF	.60 DCoF	.57 DCoF	.65 DCoF	.55 DCoF
ASTM D2047 dry / wet	.92/.88	.9/1.0	.70/.70	.88/1.03	.88/1.03
DIN 51130	R12	R11	R10	R11	R10
BS 7976 TRRL ASTM E303	55+	45+	36+	50+	
Sound insulation					
ISO 10140	10dB	5dB	7dB	5dB	13dB
Test results					
Static load limit ASTM F970	2000psi	1000psi	500psi	1500psi	500psi
Surface burning CAN/ULC - S102.2	Tested	Tested	Tested	Tested	Tested
Critical radiant flux ASTM E648	Class 1	Class 1	Class 1	Class 1	Class 1
Smoke generation ASTM E662	Pass	Pass	Pass	Pass	Pass
Cleaning technology					
Altro Easyclean	✓	✓	✓	✓	✓
Sustainable attributes					
Recycled content % (pre /post)	0/10	0/10	0/10	0/10	0/10
O-phthalate-free	✓	✓	✓	✓	✓
Low VOC	✓	✓	✓	✓	✓
FloorScore certified	✓	✓	✓	✓	✓
Bio-based content	✓	✓	✓	✓	✓



Altro Promenade in Turks shown




slip- resistant flooring

In many commercial areas, your slip risk is not as high as specialized area types like commercial kitchens and other wet environments. But your patrons, patients, students and employees still deserve to be secure on their feet — and you deserve peace of mind. We offer slip-resistant flooring that meets and exceeds safety standards. It reduces the risk of slips and falls and looks good doing so. It has become a practical and durable commercial flooring solution in a variety of application areas.


Slip-resistant flooring

Why choose slip-resistant flooring?	32
Measuring durability, stain and chemical resistance	33
Slip-resistant product offerings	34
Technical chart	47

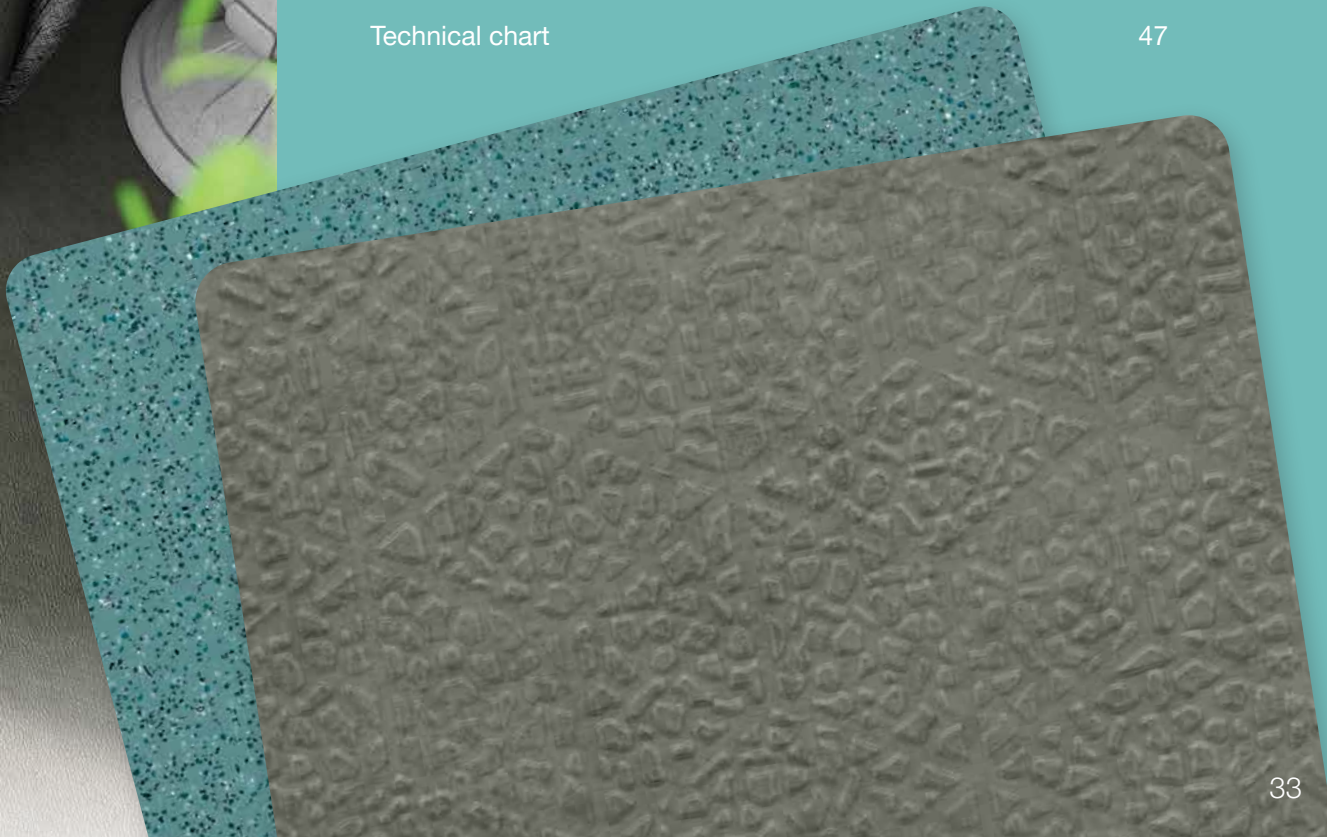

Why slip-resistant flooring?

Slip-resistant flooring is a practical solution to blending safety flooring properties with modern, less industrial, commercial flooring looks. It delivers peace of mind and looks good doing so. Slip-resistant offers customers durable flooring with enhanced stain protection and chemical resistance. It withstands heavy pedestrian traffic, heavy rolling loads and high PSI demands. Slip-resistant floors are a robust commercial flooring option for areas requiring heavy-duty flooring without an increased slip risk due to contaminants like oils, fats and soaps.

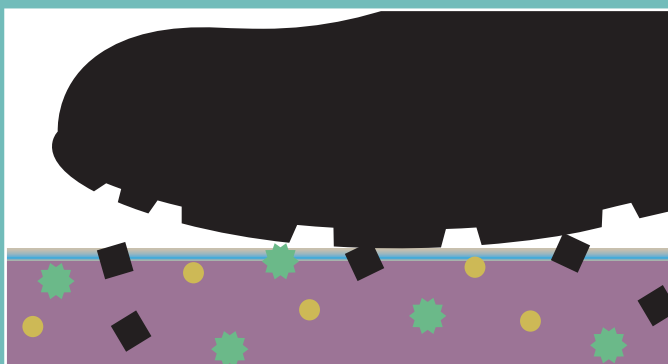

The pressure created by walking over slip-resistant flooring causes aggregates in the flooring to push up and rub against the shoe, creating friction. Because of this, Altro slip-resistant flooring remains safe, even when the surface profile is wet.

Typical slip-resistant applications

- Healthcare
- Education
- Back-of-house
- High-traffic areas
- Manufacturing and industrial areas
- Chemical processing
- Laboratories
- Veterinary
- Retail and public spaces
- Any location with moderate slip-risk or durability concerns

Measuring durability



Busy environments with various demands on the floors from foot traffic and rolling loads of heavy equipment require durable flooring. Our heavy-duty slip-resistant solutions are developed to meet your needs in these tough, working environments.

But how can durability be quantified? One way is through PSI testing. PSI testing (called static load limit testing) is a way of measuring flooring to see if it will indent under pressure.

While the industry standard only calls for tests up to 250 pounds per square inch, Altro tests beyond that. We understand that the demands of today's facilities call for products that can withstand greater amounts of weight.

For instance, a bariatric bed with a patient can weigh as much as 1,500 lbs and is only supported by four castor wheels. That is intense point loading and a competitor's floor with a 250lb/psi would fail. The floor would break or indent, leaving not only a safety and hygiene hazard, but an expensive repair and facility downtime as well.

Altro has products that are tested and proven to withstand weights of over 2,000 psi.

Chemical and stain resistance



Floors in heavy-duty application areas are often subjected to a barrage of aggressive chemicals. These surfaces see everything from decontaminants to germicidal cleaners and disinfectants on a regular basis. It is important your facility is furnished with materials that will stand up to these powerful agents.

Our slip-resistant flooring offers a high level of resistance against stains and resists many common chemicals such as sodium hypochlorite, phenolic disinfectants, and germicidal cleaners like Preempt and Simple Green D.

Regardless, it is still very important that steps are taken to ensure a long-lasting floor:

- Specify colors appropriate for the application area
- Use manufactured recommended cleaners
- Train maintenance staff on proper care and regular cleaning procedures
- Make critical staining areas in a darker color

Altro Reliance™ 25

The Deep Aquarium



Looking for a robust, heavy-duty solution for your back-of-house or front-of-house areas? With both traditional and modern looks in one slip-resistant range, it's easier than ever.

Confidence, trust and assurance – Altro Reliance 25 is a premium choice in heavy-duty commercial flooring. At 2.5mm thick, it is highly durable and can cope with high levels of foot and wheeled traffic without compromising on performance.

Combine Altro Reliance 25 with Altro wall protection for your toughest areas.

Typical applications

Healthcare, laboratories, kitchens, bars, cafeterias, veterinaries, industrial areas, manufacturing, machine shops, chemical processing, arenas and more



Looks great with

- Altro Walkway 20
- Altro Symphonia
- Altro Orchestra
- Altro Wood Comfort
- Altro Lavencia
- All Altro wall options



Sustainability

- 10% post-consumer recycled content
- O-phthalate free
- Contains bio-based content
- FloorScore certified and low VOC compliant
- Contributes to LEED

More content online www.altro.com



Samples

Experience has shown that printing cannot reproduce colors accurately. If color choice is critical, please request a sample of the material.


Samples are available on altro.com or through Material Bank.

Features + benefits

- Highly durable and robust at 2.5mm thick
- Both traditional and modern looks available
- Able to endure high levels of foot and wheeled traffic
- Withstands 2000psi
- Achieves high slip resistance levels
- Highly chemical and stain-resistant
- FloorScore Certified / Low VOCs

1 in a
million
for life>.8D
.9W
SCOF.56
DCOFPendulum test
PTV
≥40R₁₀

Featured in image above




Jet
D2501
WR100 / AM100

LRV 6




Midnight
D25421
WR72 / AM72

LRV 11




Storm
D25903
WR82 / AM82

LRV 16




Fog
D25153
WR81 / AM81

LRV 27




Skyline
D25332
WR52 / AM52

LRV 25




Biscuit
D25904
WR146 / AM20

LRV 30



Bone
D25215
WR20 / AM20

LRV 37



Rust
D25907
WR150 / AM238

LRV 10

**LRV = Light reflectance value**

Please keep LRVs in mind when selecting flooring for areas with dementia and Alzheimer's patients, seniors or individuals with poor vision.




Color matched weldrods (WR) and mastics (AM) are available. You'll find their product codes under product SKUs.


**Additional, modern-look colors of
Altro Reliance 25 on reverse**

CERTIFIED BY
FSC Global Services


6'7" x 65'5"
2m x 20m
Format SHEET
Thickness 2.5mm .10"




Roof Garden
D2500
WR262 / AM154



Vault
D2517
WR277 / AM100




Ice Rink
D2514
WR291 / AM01




Statue
D2513
WR304 / AM12




Arena
D2510
WR297 / AM20



Forge
D2515
WR248 / AM238




Signal
D2516
WR300 / AM42




Plaza
D2512
WR27 / AM27



Monument
D2508
WR305 / AM239




Gallery
D2511
WR62 / AM62




Pavement
D2507
WR83 / AM83




Runway
D2506
WR72 / AM72




Temple
D2509
WR261 / AM81




Rock
D2504
WR84 / AM84



Fountain
D2502
WR306 / AM71




Stream
D2518
WR288 / AM71



Pool
D2503
WR307 / AM73

Featured in image to the right

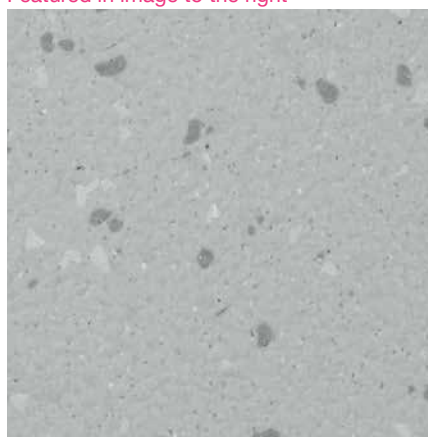

Streetlight
D2505
WR287 / AM79



Altro Walkway™ 20

1 in a
million
for life.78D
.80W
SCOF.66
DCOFPendulum test
PTV
≥36R₁₀

Triton Systems Inc.



Altro Walkway 20 is our hugely popular hard-wearing 2mm slip-resistant flooring. The range boasts many colors and shares its palette with Altro XpressLay. This enables you to combine both ranges when you need traditionally adhered and adhesive-free flooring in adjacent areas while maintaining a consistent look.

What's even better is Altro Walkway 20 offers you two distinct looks traditional and modern. Both looks come with Altro EasyClean technology for superior cleanability and stain resistance.

A static-dissipative version is available, specifically designed for locations where static buildup must be avoided.

Features + benefits

- Hard-wearing 2mm safety flooring
- Shares some colors with Altro XpressLay and Altro Aquarius for cross-product coordination
- Static-dissipative version available*
- Achieves high slip resistance ratings
- Exceeds 1000psi
- Excellent chemical and stain resistance
- FloorScore Certified / Low VOCs

Typical applications

General purpose



Looks great with

- Altro XpressLay
- Altro Aquarius
- Altro Wood
- Altro Operetta
- Altro Symphonia
- All Altro wall options



Sustainability

- 10% post and 10% pre-consumer recycled content
- O-phthalate free
- Contains bio-based content
- FloorScore certified and low VOC compliant
- Contributes to LEED

More content online www.altro.com



Samples


Experience has shown that printing cannot reproduce colors accurately. If color choice is critical, please request a sample of the material.

Samples are available on altro.com or through Material Bank.




Black
VM20892
WR100 / AM100

LRV 6




Coal
VMI2058
WR100 / AM100

LRV 6




Nightfall
VMI2056
WR72 / AM72

LRV 10




Midnight
VM20421
WR72 / AM72

LRV 11




Runway
VM2006P
WR72 / AM72

LRV 9




Pavement
VMI2007P
WR83 / AM83

LRV 14




Dolphin
VMI2010
WR86 / AM86

LRV 21



Whale
VMI2054
WR86 / AM86


LRV 20



Fog*
VM20153
WR81 / AM81


LRV 27

Also in static-dissipative




Rock
VMI2004P
WR84 / AM84

LRV 23




Nickel
VMI2019P
WR81 / AM81

LRV 29




Streetlight
VMI2005P
WR287 / AM79

LRV 45




Cloud
VM2014
WR79 / AM191

LRV 41



Blizzard
VMI2055
WR79 / AM191

LRV 44



Temple
VM2009P
WR261 / AM81

LRV 27

Featured in image left



Icon indicates quick ship colors | Additional colors of Altro Walkway 20 on reverse



LRV = Light reflectance value

Please keep LRVs in mind when selecting flooring for areas with dementia and Alzheimer's patients, seniors or individuals with poor vision.




Color matched weldrods (WR) and mastics (AM) are available. You'll find their product codes under product SKUs.



CERTIFIED BY
FSC Global Services


6'7" x 65'5"
2m x 20m
Format SHEET
Thickness 2mm .08"






Tarragon
VM2052
WR52 / AM52

LRV 26



Skyline
VM20332
WR52 / AM52

LRV 24




Tango
VM2031
WR42 / AM42

LRV 14



Tundra
VM20910
WR153 / AM239

LRV 17




Savannah
VM2050
WR153 / AM239

LRV 19



Tan
VM2018P
WR362 / AM20

LRV 41



Bisque
VM2021P
WR364 / AM335

LRV 50




Rodeo
VM2020P
WR363 / AM265

LRV 37




Biscuit
VM20907
WR146 / AM20

LRV 30




Bone
VM20215
WR20 / AM20

LRV 37




Sand
VM2051
WR20 / AM20

LRV 40




Minster
VM2018P
WR289 / AM265

LRV 40




Winter
VM2053
WR105 / AM01

LRV 61




Swan
VM2012P
WR291 / AM01

LRV 75




Lupin
VM2059
WR286 / AM286

LRV 17



Blue
VM20412
WR71 / AM71

LRV 22



River
VM2057
WR71 / AM71

LRV 22



LRV = Light reflectance value

Please keep LRVs in mind when selecting flooring for areas with dementia and Alzheimer's patients, seniors or individuals with poor vision.



Color matched weldrods (WR) and mastics (AM) are available. You'll find their codes under product SKUs.



CERTIFIED BY
FSC Global Services

6'7" x 65'5"
2m x 20m
Format SHEET
Thickness 2mm .08"

Altro Illustra™

.8
SCOF.65
DCOF.77D
.67W
DCOFPendulum test
PTV
≥36R₁₀

Looking for a slip-resistant floor that also provides aesthetic appeal? Altro Illustra offers a range of attractive possibilities, from nature-inspired stone to modern textile designs.

Whether you're creating a calming patient room, a cozy residential care home, an inspiring classroom, or a welcoming retail space, Altro Illustra is the ideal choice to bring your vision to life.

With its integrated Altro Easyclean™ technology, cleaning and maintenance is a breeze. You'll also enjoy maintenance cost savings while preserving the integrity of the slip-resistant surface.

Typical applications

Healthcare, senior living, education, retail, offices, and recreational areas



Looks great with

- Altro Operetta
- Altro Wood
- Altro Cantata
- Altro Symphonia
- Altro Walkway 20
- All Altro wall options



Sustainability

- O-phthalate free
- Contains bio-based content
- FloorScore certified and low VOC compliant
- HPD + EPD available
- Contributes to LEED

More content online www.altro.com




Samples

Experience has shown that printing cannot reproduce colors accurately. If color choice is critical, please request a sample of the material.

Samples are available on altro.com or through Material Bank.

Featured in image left




Soapstone
LU2417
WR497 / AM369

LRV 55




Ammonite
LU2416
WR567 / AM369

LRV 55




Keystone
LU2414
WR560 / AM79

LRV 41




Jurassic Slab
LU2418
WR566 / AM81

LRV 36




Canyon Clay
LU2413
WR565 / AM387

LRV 26




Sand Castle
LU2401
WR552 / AM20

LRV 43




Clay Bed
LU2402
WR61 / AM239

LRV 27




Highway
LU2403
WR561 / AM518

LRV 17



Skyfall
LU2415
WR501 / AM487

LRV 20




Bedrock
LU2412
WR562 / AM83

LRV 13




Hazy Twist
LU2409
WR446 / AM347

LRV 38



Gentle Twist
LU2410
WR479 / AM361

LRV 25



Midnight Twist
LU2411
WR301 / AM82

LRV 12

**LRV = Light reflectance value**

Please keep LRVs in mind when selecting flooring for areas with dementia and Alzheimer's patients, seniors or individuals with poor vision.



Color matched weldrods (WRP) and mastics (AM) are available. You'll find their product codes under product SKUs.



CEPHEUS BY
PCS Global Services

6'7" x 65'5"
2m x 20m

Format
SHEET

Thickness
2mm | .08"

Altro Promenade™

>.7D
>.8W
SCOF

.38
DCOF

Pendulum test
**PTV
≥45**

Suitable for exterior use!

Morgan's on Fulton

Designed for exterior use, Altro Promenade sheet vinyl flooring provides essential slip resistance in areas exposed year-round to changing weather conditions. This range is ideal for indoor applications as well as patios, decks and pool surrounds that prioritize both safety and aesthetic appeal.

Altro Promenade's impervious surface prevents rainwater and excess moisture accumulation that can damage subfloors over time. It is capable of enduring harsh sunlight and fluctuating temperatures without cracking, fading, or falling apart, making it a practical solution for outdoor areas.

Altro Promenade offers a low-depth stepped embossing for smooth underfoot comfort and enhanced cleanability while still providing slip resistance.

Typical applications

Patios, decks, pool surrounds, spas, balconies, outdoor spaces



Looks great with

- Altro Reliance 25
- Altro Orchestra
- Altro Wood Comfort
- All Altro wall options



Sustainability

- Low VOCs
- Contributes to LEED


More content online www.altro.com



Samples


Experience has shown that printing cannot reproduce colors accurately. If color choice is critical, please request a sample of the material.

Samples are available on altro.com or through Material Bank.




**Antigua
P404**
WRP404 / AM82

LRV 11



**Nevis
P402**
WRP402 / AM239


LRV 16



**Kitts
P401**
WRP401 / AM265

LRV 30

Featured in image left



**Turks
P643**
WRP643 / AM239

LRV 17



**Barbuda
P640**
WRP640 / AM239

LRV 17




**Grenada
P642**
WRP642 / AM200

LRV 23




**Trinidad
P807**
WRP807 / AM200

LRV 51




**Tobago
P603**
WRP603 / AM100

LRV 7



**Martinique
P801**
WRP801 / AM272

LRV 35



**Curacao
P802**
WRP802 / AM71

LRV 25



Altro Promenade Trims

New trims engineered for Altro Promenade are now available.



LRV = Light reflectance value

Please keep LRVs in mind when selecting flooring for areas with dementia and Alzheimer's patients, seniors or individuals with poor vision.



Color matched weldrods (WRP) and mastics (AM) are available. You'll find their product codes under product SKUs.



5'11" x 32'9"
1.82m x 10m
Format SHEET
Thickness 2.5mm .10"



Gulf Coast Veterinary Clinic - Altro Walkway 20

	Altro Reliance 25	Altro Walkway 20	Altro Illustra	Altro Promenade
Format	sheet	sheet	sheet	sheet
Thickness	2.5mm .10"	2mm .08"	2mm .08"	2.5mm .10"
Width	2m 6'7"	2m 6'7"	2m 6'7"	1.82m 5'11"
Length	20m 65' 5"	20m 65' 5"	20m 65' 5"	10m 32'9"
Weight	6.27 lbs /yd ²	4.79 lbs /yd ²	4.9 lbs /yd ²	120 lbs (roll weight)
Warranty	15 years	10 years	10 years	10 years
Slip resistance				
ANSI/NFSI B101.3	.56 DCoF	.66 DCoF	.65 / .77 DCoF	.38 DCoF
ASTM D2047 dry / wet	≥.8 /.9	.78/.80	.8	.7/.8
DIN 51130	R10	R10	R10	
BS 7976 TRRL ASTM E303	40+	36+	36+	45+
Sound insulation				
ISO 10140	7dB	5dB	4dB	
Test results				
Static load limit ASTM F970	2000psi	1000psi	2000psi	1000psi
Surface burning CAN/ULC - S102.2	Tested	Tested	Tested	Tested
Critical radiant flux ASTM E648	Class 1	Class 1	Class 1	Class 1
Smoke generation ASTM E662	Pass	Pass	Pass	Pass
Cleaning technology				
Altro Easyclean	✓	✓	✓	
Sustainable attributes				
Recycled content % (pre /post)	0/10	10/10	0/0	0/0
O-phthalate-free	✓	✓	✓	
Low VOC	✓	✓	✓	✓
FloorScore certified	✓	✓	✓	
Bio-based content	✓	✓	✓	





adhesive-free flooring

Our award-winning adhesive-free flooring has expanded to include three unique ranges with differing aesthetics and physical attributes. Each of these solutions offer unique advantages that make them adaptable to your design's specific needs.

Adhesive-free flooring

Why adhesive-free flooring?	50
Benefits of Altro adhesive-free	51
Adhesive-free sheet product offerings	52
Technical chart	63



Why adhesive-free sheet flooring?

Altro's award-winning, adhesive-free floors now feature new ranges offering you enhanced comfort underfoot and greater impact sound reduction. With more color and wood-look options, these solutions provide complete flexibility for different application areas and aesthetic appeal.

Teamed with the benefits of reduced installation time, cost savings and sustainable attributes, we invite you to discover how Altro adhesive-free is the next step in the evolution of commercial flooring.

- Smooth and slip-resistant options
- Classic, modern and wood-look visuals
- Underfoot comfort and sound reduction - 14dB (Altro Cantata and Altro Wood adhesive-free)
- Quickly installs with tape for minimal downtime
- Can be welded and walked on same day
- Install in areas up to 98% relative humidity*
* A fully intact and efficient sub slab vapor barrier/retardant must be in place.
- Embossed backing allows subfloor moisture to dissipate
- No adhesive odors
- Easy removal allows it to be uplifted, reused and recycled
- Contains rapidly renewable bio-based content
- Emits low VOCs
- Many match and/or coordinate with glue-down counterparts

Typical adhesive-free applications

- General purpose use throughout all sectors
- Fast track projects
- Temporary and modular building
- Healthcare
- Education
- Historical buildings



PiggleFairy Puppies - Altro Cantata



Less downtime

With Altro adhesive-free sheet flooring, surface damp-proof membranes and adhesives are a thing of the past. Your installation can be up and ready in half the time of a traditional adhered sheet floor, letting you get back to business with minimal interruption to your schedule.

Install over existing flooring


Altro adhesive-free flooring can be installed over existing intact substrates without applying adhesive. This can save you thousands in expensive flooring removal and asbestos abatement.



Heavy rolling loads

Altro adhesive-free sheet flooring holds effectively. In fact, it has been tested with a 1,975lbs (900kg) drilling rig with caterpillar tracks. A patient on a hospital bed, utility carts, or heavy equipment is no problem at all!

Adhesive-free sheet flooring holds as effectively as Altro glue-down sheet flooring; no rucks, no movement. They achieve optimum installation results and conformity to our 10-year warranty!

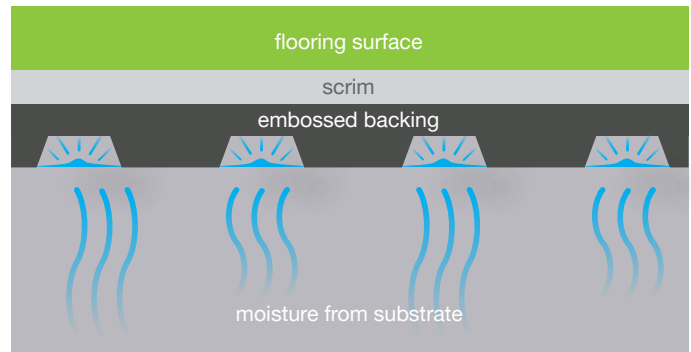

Moisture problem? Not anymore!

The specially formulated studded underside emboss allows Altro adhesive-free sheet flooring to sit off the subfloor, letting the floor breathe, resulting in any moisture dissipating.

Fresh slab? No problem!

The revolutionary underside emboss means that Altro adhesive-free sheet flooring can be used on fresh concrete subfloors up to 98% relative humidity (RH)*.

There is no need to wait for new concrete to reach 90% RH, allowing you to install flooring quickly and easily without having to wait for the substrate to dry.

** A fully intact and efficient sub slab vapor barrier/retardant must be in place.*



Remove, reuse, recycle

Altro adhesive-free sheet flooring is 100% recyclable post-consumer and can be reused in other installations.

We have numerous success stories of re-purposing large format installations in which the floor is installed temporarily, lifted and used again.

At its end of life, Altro adhesive-free sheet flooring can be removed quickly and reused or recycled; there's no flooring covered with adhesive and bits of substrate to deal with.

Altro XpressLay™



University of Sheffield Heartspace



The world's first adhesive-free safety floor that can save you money on materials and time on installation. Altro XpressLay is the next step in the evolution of safety flooring. It's installed using a tape system instead of adhesive - so it can be installed without a surface DPM. This means that you can weld the same day it is installed, greatly reducing installation time. It can be easily removed post-installation, reused elsewhere and then recycled at the end of its life.

Altro XpressLay includes a wide range of colors featuring bright and subtle, sparkle-free designs and decorative chipped options. We know how important it is that your floor stays looking good year after year, so we've added Altro Easyclean for superior chemical and stain resistance.

Typical applications

General purpose, fast-track, retrofits, education, temporary healthcare, modular and historical buildings

Features + benefits

- One-in-a-million slip resistance reassurance
- Quickly installs with tape
- Can be welded and walked on same day
- Install in areas up to 98% relative humidity
- Embossed backing allows moisture to dissipate
- No adhesive odors
- Easy removal - uplift, reuse and recycle
- Contains rapidly renewable bio-based content
- Emits low VOCs
- Coordinates with popular Altro Walkway 20



Looks great with

- Altro Walkway 20
- Altro Cantata
- Altro Wood adhesive-free
- Altro Lavencia
- All Altro wall options



Sustainability

- 5% post-consumer recycled content
- O-phthalate free
- Contains bio-based content
- FloorScore certified and low VOC compliant
- Contributes to LEED


More content online www.altro.com



Samples


Experience has shown that printing cannot reproduce colors accurately. If color choice is critical, please request a sample of the material.

Samples are available on altro.com or through Material Bank.




Blizzard
XL12255
WR79 / AM191

LRV 44




Streetlight
XL12205P
WR287 / AM79

LRV 45




Whale
XL12254
WR86 / AM86

LRV 20




Fog
XL22153
WR81 / AM81

LRV 27




Dolphin
XL2210
WR86 / AM86

LRV 21




Pavement
XL12207P
WR83 / AM83

LRV 14




Runway
XL2206P
WR72 / AM72

LRV 9




Nightfall
XL12256
WR72 / AM72

LRV 10



Black
XL22892
WR100 / AM100


LRV 6



Coal
XL12258
WR100 / AM100

LRV 6

Featured in image left

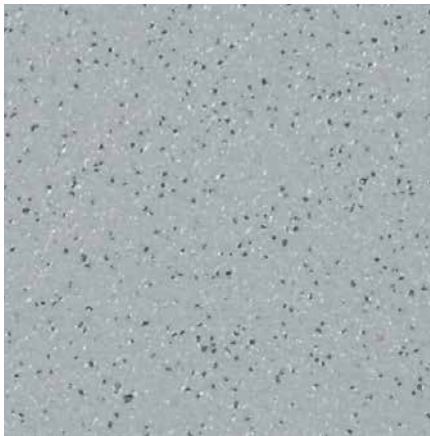

Temple
XL2209P
WR261 / AM81

LRV 27



Icon indicates quick ship colors | Additional colors of Altro XpressLay on reverse



LRV = Light reflectance value

Please keep LRVs in mind when selecting flooring for areas with dementia and Alzheimer's patients, seniors or individuals with poor vision.




Color matched weldrods (WR) and mastics (AM) are available. You'll find their product codes under product SKUs.




CERTIFIED BY
FSC Global Services

6'7" x 65'5"
2m x 20m
Format
SHEET
Thickness
2.2mm 0.87"




Swan
XL12212P
 WR291 / AM01

LRV 75




Minster
XL2218P
 WR289 / AM265

LRV 40




Sand
XL12251
 WR20 / AM20

LRV 40




Bone
XL22215
 WR20 / AM20

LRV 37




Biscuit
XL22907
 WR146 / AM20

LRV 30




Tundra
XL22910
 WR153 / AM239

LRV 17



Tarragon
XL12252
 WR52 / AM52



LRV 26



River
XL12257
 WR71 / AM71

LRV 22

What do the codes under swatches mean?

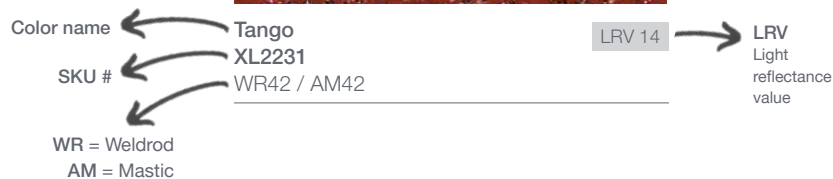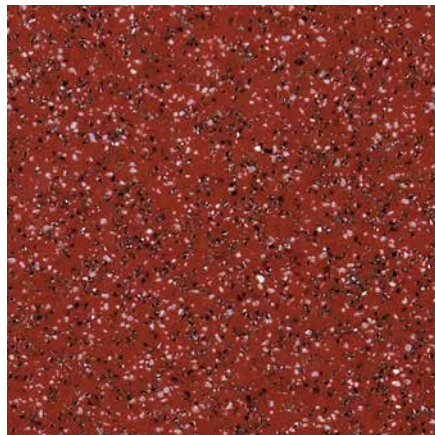

Looks great with

- Altro Walkway 20
- Altro Cantata
- Altro Wood adhesive-free
- Altro Lavencia
- All Altro wall options



Sustainability

- 5% post-consumer recycled content
- O-phthalate free
- Contains bio-based content
- FloorScore certified and low VOC compliant
- Contributes to LEED

More content online www.altro.com



Samples

Experience has shown that printing cannot reproduce colors accurately. If color choice is critical, please request a sample of the material.

Samples are available on altro.com or through Material Bank.



Altro Stronghold™ 30 adhesive-free

University of Sheffield Heartspace



Get your kitchen up and running in record time with the new Altro Stronghold™ 30 adhesive-free flooring. Specifically designed for commercial kitchens and back-of-house areas, this revolutionary flooring can be welded and walked on the same day, slashing kitchen downtime.

Altro Stronghold 30 adhesive-free flooring is built to last, engineered to handle tough kitchen environments. It's a breeze to install, maintain, and repair, with exceptional scratch and scuff resistance for enduring performance. Featuring Altro's highest slip resistance rating and a comfortable 3mm thickness, it also reduces noise by up to 10dB..

Typical applications

Small commercial kitchens, food preparation, back-of-house service areas, temporary kitchens

Features + benefits

- Adhesive-free installation for minimum downtime
- Achieves highest level of slip resistance
- Risk of slipping is 1 in a million even with contaminants present
- Heat-welded seams for better hygiene
- FDA / USDA / CFIA / HACCP compliant
- FloorScore Certified / Low VOCs
- Independent Halo tests indicate 10x lower bacteria count than quarry tile
- Fungi and mold-resistant, achieves zero growth after 21 days



Looks great with

- Altro Puraguard
- Altro Classic 25
- Altro Atlas 40
- Altro Lavencia
- Altro Wood Acoustic
- All Altro wall options



Sustainability

- 10% post-consumer recycled content
- O-phthalate free
- Contains bio-based content
- FloorScore certified and low VOC compliant
- Contributes to LEED


More content online www.altro.com



Samples


Experience has shown that printing cannot reproduce colors accurately. If color choice is critical, please request a sample of the material.

Samples are available on altro.com or through Material Bank.




Tundra AF
AFK30500
WR153 / AM239

LRV 17



Abyss AF
AFK3001
WR100 / AM100


LRV 7



Midnight AF
AFK30421
WR72 / AM72

LRV 11

Featured in image above

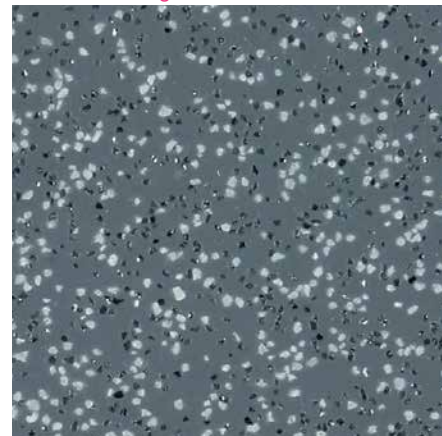

Dolphin AF
AFK3010
WR86 / AM86

LRV 21



LRV = Light reflectance value

Please keep LRVs in mind when selecting flooring for areas with dementia and Alzheimer's patients, seniors or individuals with poor vision.



Color matched weldrods (WR) and mastics (AM) are available. You'll find their product codes under product SKUs.



6'7" x 49"
2m x 15m
Format
SHEET
Thickness
3mm .12"



Altro Illustra™ adhesive-free

.8
SCOF.65
DCOF.77D
.67W
DCOFPendulum test
PTV
≥36R₁₀

Looking for a slip-resistant floor that also provides aesthetic appeal? Altro Illustra offers a range of attractive possibilities, from nature-inspired stone to modern textile designs.

Whether you're creating a calming patient room, a cozy residential care home, an inspiring classroom, or a welcoming retail space, Altro Illustra is the ideal choice to bring your vision to life.

With its integrated Altro Easyclean™ technology, cleaning and maintenance is a breeze. You'll also enjoy maintenance cost savings while preserving the integrity of the slip-resistant surface.

Typical applications

Healthcare, senior living, education, retail, offices, and recreational areas

Features + benefits

- Attractive visuals including stone and textiles
- Slip-resistance reassurance – R10, PTV > 36
- Easy to clean and maintain with Altro Easyclean Technology
- Highly durable - resists up to 2,000psi
- 10-year warranty
- HPD + EPD available
- FloorScore Certified / Low VOCs



Looks great with

- Altro Operetta
- Altro Wood
- Altro Cantata
- Altro Symphonia
- Altro Walkway 20
- All Altro wall options



Sustainability

- O-phthalate free
- Contains bio-based content
- FloorScore certified and low VOC compliant
- HPD + EPD available
- Contributes to LEED

More content online www.altro.com



Samples

Experience has shown that printing cannot reproduce colors accurately. If color choice is critical, please request a sample of the material.

Samples are available on altro.com or through Material Bank.

Featured in image left




Soapstone
LUAF2417
WR497 / AM369

LRV 55




Ammonite
LUAF2416
WR567 / AM369

LRV 55




Keystone
LUAF2414
WR560 / AM79

LRV 41




Jurassic Slab
LUAF2418
WR566 / AM81

LRV 36




Canyon Clay
LUAF2413
WR565 / AM387

LRV 26




Sand Castle
LUAF2401
WR552 / AM20

LRV 43




Clay Bed
LUAF2402
WR61 / AM239

LRV 27




Highway
LUAF2403
WR561 / AM518

LRV 17



Skyfall
LUAF2415
WR501 / AM487

LRV 20




Bedrock
LUAF2412
WR562 / AM83

LRV 13


Featured in image left

Featured in image left




Hazy Twist
LUAF2409
WR446 / AM347

LRV 38



Gentle Twist
LUAF2410
WR479 / AM361

LRV 25




Midnight Twist
LUAF2411
WR301 / AM82

LRV 12



Winter Sky
LUAF2407
WR542 / AM516

LRV 38




Green Tea
LUAF2406
WR242 / AM154

LRV 20




Warm White
LUAF2408
WR570 / AM11

LRV 57



Palest Pink
LUAF2405
WR535 / AM149

LRV 29



Citrine
LUAF2404
WR529 / AM42

LRV 26

Featured in image left

**LRV = Light reflectance value**

Please keep LRVs in mind when selecting flooring for areas with dementia and Alzheimer's patients, seniors or individuals with poor vision.



Color matched weldrods (WR) and mastics (AM) are available. You'll find their codes under product SKUs.

CERTIFIED BY
FSC Global Services

6'7" x 65'5"
2m x 20m
Format SHEET
Thickness 2mm .08"

Altro Wood™ adhesive-free



**1 in a
million**
for Life

Broomhills Primary School



Altro Wood adhesive-free creates maximum impact with minimum downtime. With a wide variety of color choices, 14dB sound reduction, a 10-year warranty and our Altro one-in-a-million slip resistance reassurance, Altro Wood adhesive-free offers high levels of comfort underfoot providing a safe, durable and decorative solution for busy spaces.

Using our award-winning adhesive-free installation method, it can be welded and walked on the same day, and at the end of its life can be removed easily, allowing it to be reused or recycled. Using Altro adhesive-free floors, you can halve installation time compared with a traditional adhered installation. It is ideal for busy public spaces where disruption needs to be minimal, plus there are no associated adhesive odors.

Typical applications

Healthcare, temporary healthcare, modular buildings, historical buildings, senior living, education, retail and offices, hallways, general circulation areas



Looks great with

- Altro Cantata
- Altro Wood Comfort
- Altro XpressLay
- All Altro wall options



Sustainability

- O-phthalate free
- Contains bio-based content
- FloorScore certified and low VOC compliant
- Contributes to LEED

More content online www.altro.com

Features + benefits

- One-in-a-million slip resistance reassurance
- Underfoot comfort
- Sound reduction - 14dB
- Quickly installs with tape - weld and walk
- Install in areas up to 98% relative humidity
- Embossed backing allows moisture to dissipate
- No adhesive odors
- Easy removal - uplift, reuse and recycle
- Authentic looking wood-grain visuals
- Has coordinating looks in 2mm, 2.85mm and 3.9mm



Samples

Experience has shown that printing cannot reproduce colors accurately. If color choice is critical, please request a sample of the material.

Samples are available on altro.com or through Material Bank.




AF Bleach. Oak LRV 52
AFW280001
 WR335 / AM335



AF Castle Oak LRV 51
AFW280013
 WR335 / AM335



AF Wash. Oak LRV 38
AFW280007
 WR347 / AM347



AF Worn Oak LRV 19
AFW280012
 WR322 / AM239



AF Manor Oak LRV 7
AFW280008
 WR348 / AM348

Featured in image left



AF Farm. Oak LRV 38
AFW280010
 WR338 / AM338



AF Oak Trad. LRV 25
AFW280006
 WR353 / AM225



AF Rustic Oak LRV 37
AFW280005
 WR340 / AM340



AF Spg. Maple LRV 27
AFW280011
 WR352 / AM352



AF Ant. Walnut LRV 15
AFW280009
 WR341 / AM160



AF Aut. Maple LRV 24
AFW280002
 WR339 / AM339



AF Urb. Cherry LRV 17
AFW280004
 WR337 / AM337



AF Vint. Cherry LRV 25
AFW280003
 WR336 / AM239



AF Bav. Oak LRV 27
AFW280015
 WR514 / AM514



AF Slate Oak LRV 26
AFW280018
 WR478 / AM390



AF Great Oak LRV 22
AFW280014
 WR339 / AM339



AF Honey Oak LRV 21
AFW280017
 WR352 / AM352



AF Sessile Oak LRV 30
AFW280016
 WR350 / AM483



LRV = Light reflectance value

Please keep LRVs in mind when selecting flooring for areas with dementia and Alzheimer's patients, seniors or individuals with poor vision.



Color matched weldrods (WR) and mastics (AM) are available. You'll find their codes under product SKUs.



CERTIFIED BY
FSC Global Services

6'7" x 65'5"
2m x 20m

Format
SHEET

Thickness
2.4mm | .09"



Altro Cantata™



Altro Cantata is a tonal and modernist, adhesive-free floor. It is ideal for busy public spaces where disruption needs to be minimal and has no associated adhesive odors. Using our award-winning adhesive-free installation method, it can be welded and walked on the same day, and at the end of its life can be removed easily, allowing it to be reused or recycled.

Altro Cantata also looks great paired with other adhesive-free ranges or may be used alongside a traditional glue-down flooring.

Typical applications

Healthcare, temporary healthcare, modular buildings, historical buildings, senior living, education, retail and offices, hallways, general circulation areas

Features + benefits

- Underfoot comfort
- Sound reduction - 14dB
- Quickly installs with tape - weld and walk on the same day
- Install in areas up to 98% relative humidity
- Embossed backing allows moisture to dissipate
- No adhesive odors
- Easy removal - uplift, reuse and recycle
- Contains rapidly renewable bio-based content
- Emits low VOCs



Looks great with

- Altro Wood adhesive-free
- Altro XpressLay
- Altro Wood Comfort
- Altro Orchestra
- All Altro wall options



Sustainability

- O-phthalate free
- Contains bio-based content
- FloorScore certified and low VOC compliant
- Contributes to LEED

More content online www.altro.com




Samples

Experience has shown that printing cannot reproduce colors accurately. If color choice is critical, please request a sample of the material.

Samples are available on altro.com or through Material Bank.




Crème Caramel LRV 50
AFP282006
 WR385 / AM385




Mocha LRV 40
AFP282003
 WR389 / AM389



Treviso LRV 44
AFT284003
 WR483 / AM483



Hazelnut LRV 18
AFP282009
 WR418 / AM239




Sunrise LRV 19
AFP282008
 WR393 / AM393


Featured in image left




Bluefin LRV 26
AFC281001
 WR438 / AM486



Bluebell LRV 26
AFP282004
 WR398 / AM398



Milan LRV 15
AFT284002
 WR482 / AM482



Venice LRV 40
AFT284004
 WR484 / AM484



Frosted Glass LRV 52
AFP282005
 WR388 / AM388

Additional colors of Altro Cantata on reverse



LRV = Light reflectance value

Please keep LRVs in mind when selecting flooring for areas with dementia and Alzheimer's patients, seniors or individuals with poor vision.



Color matched weldrods (WR) and mastics (AM) are available. You'll find their product codes under product SKUs.




CERTIFIED BY
 SGS Global Services

6'7" x 65'5"
2m x 20m
Format SHEET
Thickness 2.4mm .09"



Seal Gray
AFC281002
WR435 / AM390

LRV 26




Graphite
AFP282002
WR390 / AM390

LRV 30



Elephant Gray
AFC281003
WR436 / AM487

LRV 17



True Grit
AFP282001
WR391 / AM82

LRV 17



Rome
AFT284001
WR481 / AM83


LRV 16



Black Sand
AFP282010
WR485 / AM485

LRV 7

Featured in image right

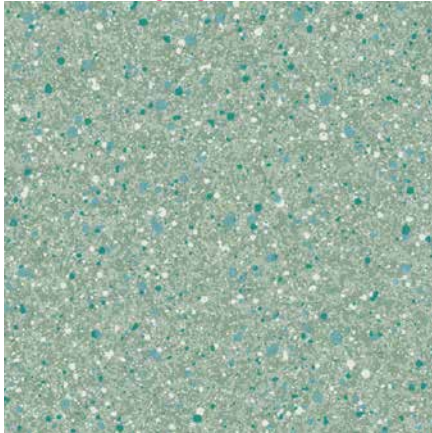

Willow Tree
AFP282007
WR399 / AM399

LRV 41



Looks great with

- Altro Wood adhesive-free
- Altro Wood Comfort
- Altro Orchestra
- Altro XpressLay
- All Altro wall options



Bärenwiese Veterinary Practice - Altro Cantata





Altro Wood adhesive-free shown in Farmhouse Oak and Altro Whiterock wall designs in Cool Mineral

	Altro XpressLay	Altro Stronghold 30 A.F.	Altro Illustra A.F.	Altro Wood A.F.	Altro Cantata
Format	sheet	sheet	sheet	sheet	sheet
Thickness	2.2mm .087"	3mm .12"	2.4mm .09"	2.4mm .09"	2.4mm .09"
Width	2m 6'7"	2m 6'7"	2m 6'7"	2m 6'7"	2m 6'7"
Length	20m 65' 5"	15m 49'	20m 65' 5"	20m 65' 5"	20m 65' 5"
Weight	4.79lbs /yd ²	7.19 lbs /yd ²	4.9 lbs /yd ²	4.42 lbs /yd ²	4.42 lbs /yd ²
Warranty	10 years	12 years	10 years	10 years	10 years
Slip resistance					
Dynamic Coefficient of Friction	.66 DCoF	.74 DCoF	.65 / .77 DCoF	.78 DCoF	.70 DCoF
ASTM D2047 dry / wet	.78/.80 SCoF	.92/.88 SCoF	.8 SCoF	.79/.94 SCoF	.79/.94 SCoF
DIN 51130	R10	R12	R10	R10	R10
BS 7976 TRRL ASTM E303	36+	55+	36+	36+	36+
Sound insulation					
ISO 10140	7dB	10dB	4dB	14dB	14dB
Test results					
Static load limit ASTM F970	2000psi	2000psi	2000psi	1000psi	1000 psi
Surface burning CAN/ULC - S102.2	Tested	Tested	Tested	Tested	Tested
Critical radiant flux ASTM E648	Class 1	Class 1	Class 1	Class 1	Class 1
Smoke generation ASTM E662	Pass	Pass	Pass	Pass	Pass
Cleaning technology					
Altro Easyclean	✓	✓	✓	✓	✓
Sustainable attributes					
Recycled content % (pre /post)	0/5	0/10	0/0	0/0	0/0
O-phthalate-free	✓	✓	✓	✓	✓
Low VOC	✓	✓	✓	✓	✓
FloorScore certified	✓	✓	✓	✓	✓
Bio-based content	✓	✓	✓	✓	✓







smooth flooring

Altro smooth flooring provides attractive designs that are easy to maintain and install. Whether it's looks, durability or life cycle costs that concern you most, smooth flooring delivers on every count. Our smooth flooring ranges are suitable for a wide array of application areas.

Smooth flooring

Why smooth flooring?	66
Smooth sheet product offerings	68
Smooth tile and LVT product offerings	90
Technical chart	106

Why smooth flooring?

Smooth flooring from Altro gives you what you want - an economical and attractive look that's easy to install and maintain. Better yet, our smooth flooring has had a significant makeover. This collection of practical design options blends an expansive color palette with integrated acoustic and hygiene benefits as well as ample comfort underfoot.

From realistic wood and linen visuals to stylish, low-maintenance LVT and even durable rubber tiles, our smooth flooring can easily adapt to fit the unique needs of your design.



Altro Lavencia in Armor shown. Also featuring Altro Whiterock wall designs and Altro Whiterock Chameleon.

What type of smooth flooring do you need?

- Smooth slip resistance - Altro Symphonia
- Underfoot comfort and noise reduction - Altro Serenade, Altro Wood Acoustic, Altro Orchestra, Altro Wood Comfort
- Budget friendly, contract sheet - Altro Wood, Altro Operetta
- Adhesive-free - Please see previous chapter on adhesive-free flooring
- Luxury vinyl tile/plank - Altro Lavencia LVT
- Robust, durable tiles - Altro Quartz Tile, Altro Ollero
- Homogeneous tile - Altro Dolce

Typical smooth applications

- Healthcare
- Senior living
- Retail
- Offices
- Education
- Hospitality
- Housing



Altro Symphonia in Agave and Ayana shown. Also featuring Altro Whiterock.

Better together

In commercial areas of frequent spills, hygiene and durability concerns, it's best to let our robust collection of safety and slip-resistant flooring join the team.

Install smooth flooring in the dining room and public areas and bring safety (or slip-resistant) flooring and wall protection into the kitchen, bar, service areas and restrooms.

You will rest easy knowing your patrons will have an exquisite experience while the most dangerous areas in your facility are well equipped to handle the tolls of the day.



Altro Symphonia™



Industry-leading commercial performance is now yours with Altro Symphonia. Reengineered with Altro ShieldTec and Altro EasyClean for revolutionary stain, chemical and abrasion resistance. Ideal floor for healthcare and meets ISO Class 4 cleanroom requirements.

Our palette now features a range of stylish colors reflecting contemporary trends and diverse interior design needs from across the globe. But don't let Altro Symphonia's delightfully smooth appearance fool you! It delivers all the performance you would expect from Altro including exceptional sustained slip resistance, industry-leading durability and a 10-year warranty.

Typical applications

Hospitals, operating rooms, patient rooms, lobbies, senior living communities, education, retail, cafés, offices, general front-of-house and multi-purpose areas

Features + benefits

- Bridges the gap between smooth and slip-resistant flooring
- Industry leading stain, chemical and abrasion resistance - ideal for healthcare applications
- Achieves R10 slip resistance rating and SCoF of .8 dry, .9 wet
- Meets ISO Class 4 cleanroom requirements
- Resists up to 2,000 psi indentation
- FloorScore Certified / Low VOCs



Looks great with

- Altro Wood
- Altro Operetta
- Altro Walkway 20
- All Altro wall options



Sustainability

- 5% post-consumer recycled content
- O-phthalate free
- Contains bio-based content
- FloorScore certified and low VOC compliant
- Contributes to LEED

More content online www.altro.com




Samples

Experience has shown that printing cannot reproduce colors accurately. If color choice is critical, please request a sample of the material.

Samples are available on altro.com or through Material Bank.

Featured in image left



Pampas
SY20009
WR569 / AM01

LRV 62



Ayana
SYI20034
WR105 / AM01

LRV 62



Snapdragon
SYD20036
WR105 / AM01

LRV 57




Ornella
SY20024
WR534 / AM11

LRV 49



Roselle
SYI20025
WR534 / AM11

LRV 49



Hibiscus
SY20005
WR79 / AM191

LRV 42




Peony
SYI20035
WR79 / AM79

LRV 41



Cicely
SY20006
WR81 / AM81

LRV 28



Oleander
SY20037
WR354 / AM84

LRV 25




Daylily
SYI20039
WR532 / AM84

LRV 23




Agave
SY20002
WR525 / AM86

LRV 19



Festuca
SYI20010
WR528 / AM82

LRV 15



Cardoon
SYI20003
WR301 / AM82

LRV 11



Italicum
SY20001
WR301 / AM82

LRV 12



Altro Symphonia reengineered

Altro Symphonia now features our new Altro ShieldTec technology. Learn more on the next page.



LRV = Light reflectance value

Please keep LRVs in mind when selecting flooring for areas with dementia and Alzheimer's patients, seniors or individuals with poor vision.



Color matched weldrods (WR) and mastics (AM) are available. You'll find their product codes under product SKUs.



6'7" x 65'5"
2m x 20m

Format
SHEET

Thickness
2mm | .08"

Featured in image right



Calla
SY20030
WR538 / AM515

LRV 37



Begonia
SYD20038
WR527 / AM265

LRV 42



Evora
SYI20017
WR538 / AM515

LRV 37



Primula
SY20023
WR543 / AM335

LRV 50




Diantha
SY20007
WR527 / AM265

LRV 37



Dicentra
SYI20022
WR543 / AM335

LRV 50




Hazel
SY20008
WR526 / AM239

LRV 22




Coleus
SYI20004
WR526 / AM239

LRV 22



Dahlia
SY20019
WR540 / AM303

LRV 14



Cranebill
SY20011
WR529 / AM238

LRV 9



Acer
SY20027
WR544 / AM396

LRV 52



Wildier
SY20021
WR542 / AM516

LRV 37




Kolibri
SY20014
WR533 / AM399

LRV 35



Gerbera
SY20031
WR547 / AM154

LRV 20



Sorrel
SY20028
WR545 / AM517

LRV 11

**Looks great with**

- Altro Wood
- Altro Operetta
- Altro Walkway 20
- All Altro wall options

**Sustainability**


- 5% post-consumer recycled content
- O-phthalate free
- Contains bio-based content
- FloorScore certified and low VOC compliant
- Contributes to LEED

More content online www.altro.com

**Samples**


Experience has shown that printing cannot reproduce colors accurately. If color choice is critical, please request a sample of the material.

Samples are available on altro.com or through Material Bank.




Clematis
SYI20029
WR546 / AM228

LRV 27




Madara
SY20032
WR548 / AM56

LRV 19



Lotus
SY20015
WR536 / AM71

LRV 14



Orrin
SY20040
WR550 / AM223

LRV 9




Salvia
SY20012
WR530 / AM73

LRV 9



Freesia
SY20018
WR539 / AM42

LRV 26



Senna
SY20033
WR549 / AM152

LRV 31



Scan the QR above to see
Altro Symphonia's stain
resistance and cleaning
performance in action!



Introducing Altro ShieldTec technology



Revolutionary advancements in the manufacturing process of Altro Symphonia have now allowed us to produce our most stain-resistant technology to date. Altro ShieldTec delivers industry-leading commercial performance in key attribute areas like stain resistance, chemical resistance, and abrasion resistance.

Altro ShieldTec, teamed with our tried-and-true Altro Easyclean Technology, will provide you with industry-leading commercial flooring performance. All backed by *third-party independent test houses.

- Revolutionary stain resistance
- Betadine-resistant even after 24 hours
- Industry-leading cleanability
- Exceptional chemical + abrasion resistance
- Long-term durability and color retention
- Lifetime maintenance cost savings
- Sustained long-term slip resistance

*For third party testing data please refer to Altro ShieldTec flyer available on our website at altro.com

Please note: Altro suggests that customers perform a comprehensive stain evaluation using anticipated cleaning products and cleaning procedures used within their facilities prior to choosing and installing Altro Symphonia.



LRV = Light reflectance value

Please keep LRVs in mind when selecting flooring for areas with dementia and Alzheimer's patients, seniors or individuals with poor vision.



Color matched weldrods (WR) and mastics (AM) are available. You'll find their product codes under product SKUs.



6'7" x 65'5"
2m x 20m
Format SHEET
Thickness 2mm .08"

Altro Operetta™

Veterinary Specialty Center



Altro Operetta is a robust floor perfect for medium to high-traffic areas. It is easy to clean and maintain and can withstand up to 2,000psi indentation. It has many attractive natural and contemporary colors and finishes to fit your interior design scheme. It matches and coordinates with Altro Orchestra and Altro Serenade to create a complete look throughout.

Combine with our extensive range of Altro wall panels for an attractive and durable floor and wall system.

Typical applications

Healthcare, senior living, education, retail, offices and recreational areas

Features + benefits

- Smooth surface is easy to clean and maintain
- Colors coordinate with Altro Orchestra and Altro Serenade ranges for a complete look throughout
- Meets ISO Class 4 cleanroom requirements
- Resists up to 2,000 psi indentation
- FloorScore Certified / Low VOCs



Looks great with

- Altro Serenade
- Altro Orchestra
- Altro Wood
- Altro Cantata
- Altro Walkway 20
- All Altro wall options



Sustainability

- O-phthalate free
- Contains bio-based content
- FloorScore certified and low VOC compliant
- Contributes to LEED

More content online www.altro.com



Samples


Experience has shown that printing cannot reproduce colors accurately. If color choice is critical, please request a sample of the material.

Samples are available on altro.com or through Material Bank.




Tutti
OP2157U
WR500 / AM136

LRV 60



Iris
OP2174U
WR513 / AM85

LRV 39



Beethoven
OP2159U
WR502 / AM390

LRV 23



Black Forest
OP2158U
WR501 / AM82

LRV 13




Hurdy Gurdy
OP2173U
WR512 / AM84

LRV 24



Vivo
OP2162U
WR494 / AM494

LRV 23



Fife
OP2167U
WR508 / AM11

LRV 57




Allegra
OP2169U
WR510 / AM347

LRV 38



Quintet
OP2114U
WR435 / AM390

LRV 26



Tempo
OP2115U
WR436 / AM487

LRV 17




Pulse
OP2118U
WR439 / AM84

LRV 16




Jig
OP2148U
WR62 / AM62

LRV 9




Baron
OP2145U
WR485 / AM485

LRV 8



Sonatina
OP2147U
WR482 / AM482

LRV 15



Vagabond
OP2141U
WR484 / AM484

LRV 40



Rondo
OP2142U
WR483 / AM483

LRV 44



Icon indicates quick ship colors

Additional colors of Altro Operetta on reverse

Altro recommends conducting a risk assessment to determine if you should install safety, slip-resistant or smooth flooring. Smooth flooring is not recommended in areas with prolonged contaminants present on floor.



LRV = Light reflectance value

Please keep LRVs in mind when selecting flooring for areas with dementia and Alzheimer's patients, seniors or individuals with poor vision.



Color matched weldrods (WR) and mastics (AM) are available. You'll find their product codes under product SKUs.




CERTIFIED BY
FSC Global Services

6'7" x 65'5"
2m x 20m


Format
SHEET

Thickness
2mm | .08"



Beat
OP2155U
WR499 / AM136

LRV 56



Penzance
OP2153U
WR497 / AM369

LRV 48




Loco
OP2152U
WR496 / AM136

LRV 49



Vamp
OP2144U
WR490 / AM86

LRV 18



Lulu
OP2128U
WR449 / AM137

LRV 29



Clef
OP2125U
WR446 / AM347

LRV 37



Samson
OP2176U
WR519 / AM392

LRV 34



Shell Shack
OP2177U
WR520 / AM338

LRV 28



Drop
OP2127U
WR448 / AM361

LRV 23




Canon
OP2129U
WR450 / AM81

LRV 24



Glee
OP2136U
WR457 / AM335

LRV 52



Yeoman
OP2139U
WR460 / AM484

LRV 39




Acapella
OP2135U
WR456 / AM338

LRV 34




Madrigal
OP2134U
WR455 / AM361

LRV 31



Baroque
OP2133U
WR454 / AM86

LRV 22



Lola
OP2178U
WR391 / AM82

LRV 17

Altro recommends conducting a risk assessment to determine if you should install safety, slip-resistant or smooth flooring. Smooth flooring is not recommended in areas with prolonged contaminants present on floor.



Looks great with

- Altro Serenade
- Altro Orchestra
- Altro Wood
- Altro Cantata
- Altro Walkway 20
- All Altro wall options



Sustainability

- O-phthalate free
- Contains bio-based content
- FloorScore certified and low VOC compliant
- Contributes to LEED

More content online www.altro.com



Samples


Experience has shown that printing cannot reproduce colors accurately. If color choice is critical, please request a sample of the material.

Samples are available on altro.com or through Material Bank.



Altro Orchestra™

15dB

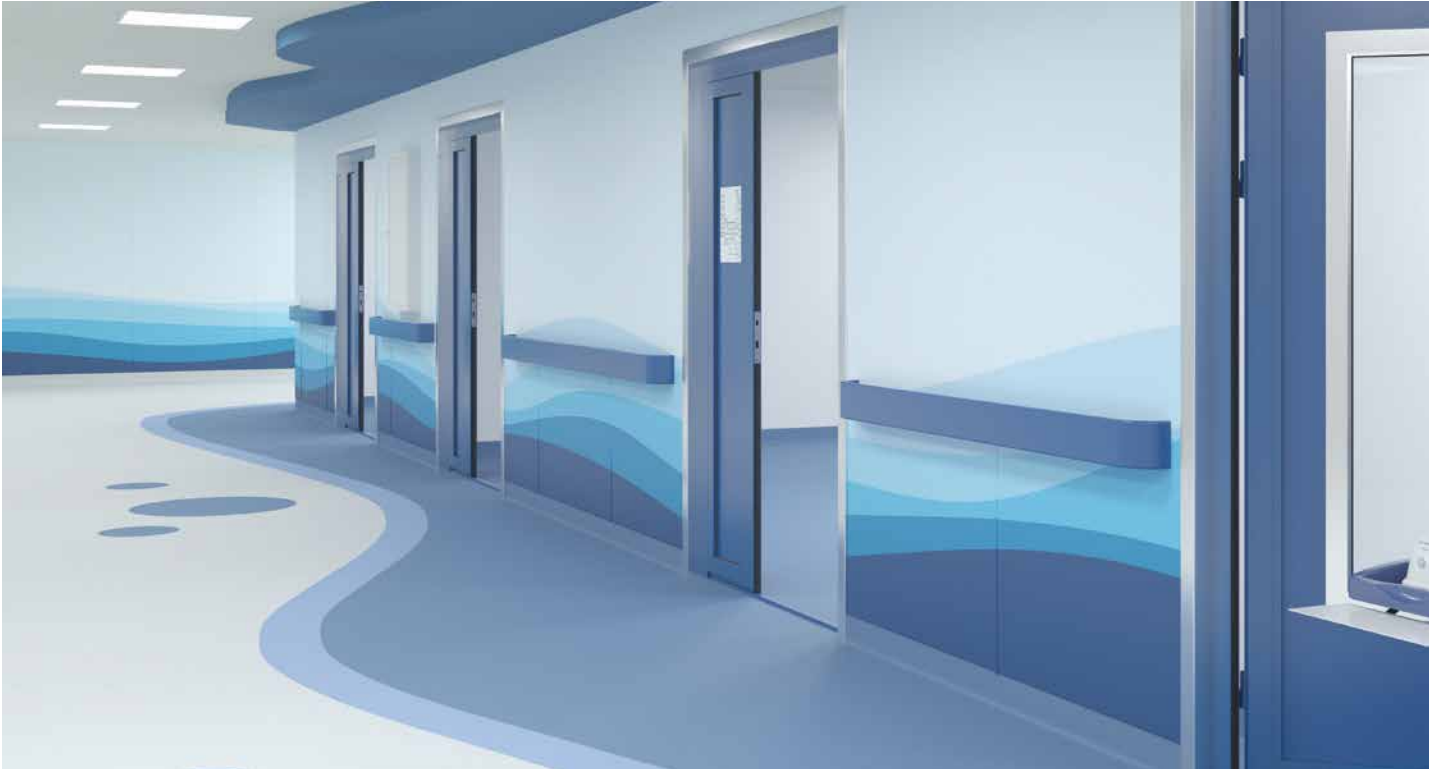

For areas where comfort and sound reduction are important, 2.85mm Altro Orchestra has been engineered to create the ideal environment to learn and live. At the same time, the integrated impact sound insulation system cuts impact sound by up to 15dB.

Altro Orchestra offers comfort underfoot, making life easier on the feet of students, patients and particularly hard-working staff who spend countless hours on the move.

With a palette full of colors and designs varying from calming neutrals reflecting tones of nature, to vibrant shades, Altro Orchestra allows you to create the right atmosphere every time.

Typical applications

Healthcare, senior living, education, retail, offices, light gym and recreational areas

Features + benefits

- Provides ample comfort underfoot
- 15dB sound reduction
- Resists up to 1,000 psi indentation
- Colors coordinate with Altro Operetta and Altro Serenade ranges for a complete look throughout
- FloorScore Certified / Low VOCs



Looks great with

- Altro Serenade
- Altro Operetta
- Altro Wood Comfort
- Altro Cantata
- Altro Reliance 25
- All Altro wall options



Sustainability

- O-phthalate free
- Contains bio-based content
- FloorScore certified and low VOC compliant
- Contributes to LEED

More content online www.altro.com



Samples

Experience has shown that printing cannot reproduce colors accurately. If color choice is critical, please request a sample of the material.

Samples are available on altro.com or through Material Bank.




Aurora
CH2857U
WR500 / AM136

LRV 60




Reed
CH2874U
WR513 / AM85

LRV 39



Polka
CH2859U
WR502 / AM390

LRV 23



Cornet
CH2864U
WR506 / AM82

LRV 20



Figaro
CH2858U
WR501 / AM82

LRV 13




Macavity
CH2867U
WR508 / AM11

LRV 57



Seville
CH2860U
WR503 / AM79

LRV 45



Sitar
CH2869U
WR510 / AM347

LRV 38



Tosca
CH2862U
WR494 / AM494


LRV 23



Nabucco
CH2873U
WR512 / AM84

LRV 24

Featured in image left



Cool Cat
CH2880U
WR500 / AM136

LRV 60




Kora
CH2871U
WR495 / AM495

LRV 8




Chant
CH2814U
WR435 / AM390

LRV 26



Club
CH2815U
WR436 / AM487

LRV 17



Metal
CH2818U
WR439 / AM84

LRV 16

Altro recommends conducting a risk assessment to determine if you should install safety, slip-resistant or smooth flooring. Smooth flooring is not recommended in areas with prolonged contaminants present on floor.



LRV = Light reflectance value

Please keep LRVs in mind when selecting flooring for areas with dementia and Alzheimer's patients, seniors or individuals with poor vision.



Color matched weldrods (WR) and mastics (AM) are available. You'll find their product codes under product SKUs.



Altro Orchestra achieves 15dB in sound reduction - ISO 10140.



CERTIFIED BY
FSC Global Services

6'7" x 65'5"
2m x 20m

Format
SHEET

Thickness
2.85mm | .11"



800.377.5597 USA 800.565.4658 CAN




support@altro.com



www.altro.com

Featured in image right




Cello
CH2829U
WR450 / AM81

LRV 24




Glockenspiel
CH2827U
WR448 / AM361

LRV 23



Trumpet
CH2825U
WR446 / AM347

LRV 37



Guitar
CH2828U
WR449 / AM137

LRV 29




Rigoletto
CH2876U
WR519 / AM392

LRV 34




Traviata
CH2877U
WR520 / AM338

LRV 28



Turnadot
CH2847U
WR482 / AM482

LRV 15




Orfeo
CH2849U
WR41 / AM41

LRV 9




Othello
CH2848U
WR62 / AM62

LRV 9




Maraca
CH2855U
WR499 / AM136

LRV 56




Serpent
CH2850U
WR517 / AM136

LRV 56




Brass
CH2842U
WR483 / AM483

LRV 44




Nottuna
CH2853U
WR497 / AM369

LRV 48



Chromatic
CH2852U
WR496 / AM136

LRV 49



String
CH2841U
WR484 / AM484

LRV 40

**Looks great with**

- Altro Serenade
- Altro Operetta
- Altro Wood Comfort
- Altro Cantata
- Altro Reliance 25
- All Altro wall options

**Sustainability**


- O-phthalate free
- Contains bio-based content
- FloorScore certified and low VOC compliant
- Contributes to LEED

More content online www.altro.com

**Samples**


Experience has shown that printing cannot reproduce colors accurately. If color choice is critical, please request a sample of the material.

Samples are available on altro.com or through Material Bank.



Percussion
CH2844U
WR490 / AM86

LRV 18




Montezuma
CH2845U
WR485 / AM485

LRV 8



Bongo
CH2840U
WR461 / AM152

LRV 27



Drum
CH2837U
WR458 / AM74

LRV 18



Oboe
CH2835U
WR456 / AM338

LRV 34




Chimes
CH2836U
WR457 / AM335

LRV 52




Violin
CH2834U
WR455 / AM361

LRV 31




Trombone
CH2839U
WR460 / AM484

LRV 39




Conga
CH2879U
WR390 / AM390

LRV 30



Flute
CH2833U
WR454 / AM86

LRV 22

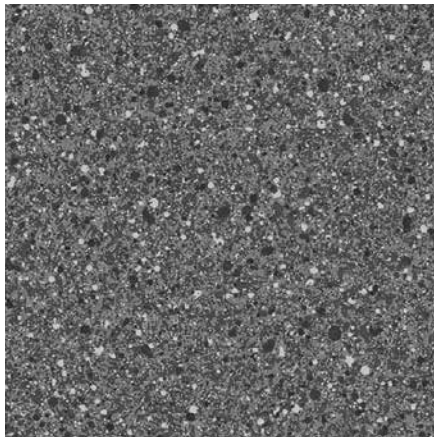

Manon
CH2878U
WR391 / AM82

LRV 17



The Barony Campus

Altro recommends conducting a risk assessment to determine if you should install safety, slip-resistant or smooth flooring. Smooth flooring is not recommended in areas with contaminants on the floor.



LRV = Light reflectance value

Please keep LRVs in mind when selecting flooring for areas with dementia and Alzheimer's patients, seniors or individuals with poor vision.



Color matched weldrods (WR) and mastics (AM) are available. You'll find their product codes under product SKUs.



Altro Orchestra achieves 15dB in sound reduction - ISO 10140.



CERTIFIED BY
FSC Global Services

6'7" x 65'5"
2m x 20m
Format SHEET
Thickness 2.85mm .11"



Fusion
CH2813U
WR434 / AM200

LRV 49



House
CH2811U
WR432 / AM200

LRV 26



Soul
CH2817U
WR438 / AM200

LRV 29



Rap
CH2820U
WR441 / AM200

LRV 30



Gospel
CH2821U
WR442 / AM200

LRV 17



Reggae
CH2801U
WR422 / AM200

LRV 48



Salsa
CH2802U
WR423 / AM200

LRV 20



Flamenco
CH2806U
WR427 / AM200


LRV 12



Jazz
CH2824U
WR445 / AM200


LRV 15

Featured in image right



Banjo
CH2826U
WR447 / AM200

LRV 38



Harp
CH2830U
WR451 / AM200

LRV 28



Creative Minds International



Looks great with

- Altro Serenade
- Altro Operetta
- Altro Wood Comfort
- Altro Cantata
- Altro Reliance 25
- All Altro wall options



Sustainability

- O-phthalate free
- Contains bio-based content
- FloorScore certified and low VOC compliant
- Contributes to LEED

More content online www.altro.com



Samples

Experience has shown that printing cannot reproduce colors accurately. If color choice is critical, please request a sample of the material.

Samples are available on altro.com or through Material Bank.

Altro Orchestra special order colors

The following colors of Altro Orchestra are also available by special order only. We do not guarantee local stock availability and orders must meet minimum material requirements. Contact an Altro representative for details.




Falstaff
CH2846U
WR493 / AM493

LRV 9



Volta
CH2851U
WR518 / AM335

LRV 48



Porter
CH2854U
WR498 / AM483

LRV 43



Woodwind
CH2843U
WR489 / AM385

LRV 45



Musette
CH2856U
WR515 / AM136

LRV 49




Timpani
CH2861U
WR504 / AM417

LRV 20




Marimba
CH2863U
WR505 / AM390

LRV 30



Carlotta
CH2865U
WR507 / AM337

LRV 26




Fidelio
CH2868U
WR509 / AM85

LRV 35



Elektra
CH2870U
WR511 / AM392

LRV 58



Bassoon
CH2831U
WR452 / AM84

LRV 17

PLEASE NOTE: These colors are available as a special order with additional lead times. Inquire with your local Altro representative.



800.377.5597 USA 800.565.4658 CAN



support@altro.com



www.altro.com



Altro Serenade™

The Glen at Willow Valley



Silence is golden. Whether softening the sounds of little feet or maximizing privacy at work or leisure, acoustic Altro Serenade is more than up to the task. At 3.9mm thick with 19dB impact sound insulation and an IIC rating of 54, not only does it reduce noise, it provides a high level of comfort underfoot, making it a great solution for well-used spaces.

All Altro Serenade color and design options have a match in the Altro Orchestra and Altro Operetta ranges.

Typical applications

Healthcare, senior living, education, retail, offices, light gym and recreational areas

Features + benefits

- Smooth surface is easy to clean and maintain
- Provides ample comfort underfoot
- 19dB sound reduction and an IIC rating of 54
- Colors coordinate with Altro Orchestra and Altro Operetta ranges for a complete look throughout
- FloorScore Certified / Low VOCs



Looks great with

- Altro Operetta
- Altro Orchestra
- Altro Wood Acoustic
- Altro Cantata
- Altro Lavencia LVT
- All Altro wall options



Sustainability

- O-phthalate free
- Contains bio-based content
- FloorScore certified and low VOC compliant
- Contributes to LEED


More content online www.altro.com



Samples


Experience has shown that printing cannot reproduce colors accurately. If color choice is critical, please request a sample of the material.

Samples are available on altro.com or through Material Bank.



Bohemia
SE3942U
WR483 / AM483

LRV 44




Romeo
SE3952U
WR496 / AM136

LRV 49



Scarlatti
SE3944U
WR490 / AM86

LRV 18




Bandola
SE3945U
WR485 / AM485

LRV 8



Torch
SE3974U
WR513 / AM85

LRV 39



Bolero
SE3959U
WR502 / AM390

LRV 23



Charm
SE3969U
WR510 / AM347

LRV 38




Elgar
SE3962U
WR494 / AM494

LRV 23



Scale
SE3977U
WR520 / AM338

LRV 28



Encore
SE3929U
WR450 / AM81


LRV 24

Featured in image left



March
SE3925U
WR446 / AM347

LRV 37



Caldara
SE3939U
WR460 / AM484

LRV 39




Adagio
SE3935U
WR456 / AM338

LRV 34



Chord
SE3934U
WR455 / AM361

LRV 31



Anthem
SE3933U
WR454 / AM86

LRV 22



Metronome
SE3914U
WR435 / AM390

LRV 26



Octave
SE3915U
WR436 / AM487

LRV 17



LRV = Light reflectance value

Please keep LRVs in mind when selecting flooring for areas with dementia and Alzheimer's patients, seniors or individuals with poor vision.



Color matched weldrods (WR) and mastics (AM) are available. You'll find their product codes under product SKUs.



Altro Serenade achieves 19dB in sound reduction (ISO 10140) and an IIC rating of 54.



CERTIFIED BY
FSC Global Services

6'7" x 65'5"
2m x 20m

Format
SHEET

Thickness
3.9mm | .15"



800.377.5597 USA 800.565.4658 CAN



support@altro.com



www.altro.com

Altro Wood™

Nethercrest Nursing Home



Altro Wood is an attractive, general purpose 2mm wood-look flooring available in a range of designs with different plank sizes and shades. These include a fine-line design, a classic wide plank and rustic designs, which help create the right look for areas where people live and work.

It's not just about looks though: Altro Wood is designed to cope with the medium to heavy traffic you would expect in busy environments. It is also a perfect partner for a variety of wall shades and finishes, from wall cladding to metal and glass, making design coordination simpler.

Typical applications

Healthcare, senior living, education, retail, offices and recreational areas

Features + benefits

- Smooth surface is easy to clean and maintain
- Authentic wood visual creates warm and inviting setting
- Impressive range of designs with different planks and shades available
- Resists up to 2,500 psi indentation
- Allows coordination with Altro Wood Comfort and Altro Wood Acoustic ranges for smooth transition between areas requiring different levels of slip resistance and sound absorption
- FloorScore Certified / Low VOCs



Looks great with

- Altro Wood Comfort
- Altro Wood Acoustic
- Altro Wood adhesive-free
- Altro Operetta
- Altro Symphonia
- Altro Walkway 20
- All Altro wall options



Sustainability

- O-phthalate free
- Contains bio-based content
- FloorScore certified and low VOC compliant
- Contributes to LEED

More content online www.altro.com



Samples

Experience has shown that printing cannot reproduce colors accurately. If color choice is critical, please request a sample of the material.

Samples are available on altro.com or through Material Bank.




Bleached Oak
WSA2001
WR335 / AM335



Castle Oak
WSA2021
WR335 / AM335



Washed Oak
WSA2015
WR347 / AM347



Worn Oak
WSA2023
WR322 / AM239



Manor Oak
WSA2016
WR348 / AM348



Farmhouse Oak
WSA2004
WR338 / AM338




Honey Beech
WSA2017
WR462 / AM462



Oak Traditions
WSA2013
WR353 / AM225



Rustic Oak
WSA2006
WR340 / AM340



Vintage Cherry
WSA2002
WR336 / AM239



Autumn Maple
WSA2005
WR339 / AM339



Spring Maple
WSA2018
WR352 / AM352



Urban Cherry
WSA2003
WR337 / AM337



Honey Oak
WSA2028
WR467 / AM467

Additional colors of Altro Wood on reverse

Altro recommends conducting a risk assessment to determine if you should install safety, slip-resistant or smooth flooring. Smooth flooring is not recommended in areas with prolonged contaminants present on floor.



LRV = Light reflectance value

Please keep LRVs in mind when selecting flooring for areas with dementia and Alzheimer's patients, seniors or individuals with poor vision.



Color matched weldrods (WR) and mastics (AM) are available. You'll find their product codes under product SKUs.



6'7" x 65'5"
2m x 20m
Format SHEET
Thickness 2mm .08"





Bavarian Oak
WSA2026
WR514 / AM514

LRV 21



Sessile Oak
WSA2027
WR350 / AM483

LRV 30

Featured in image right



Slate Oak
WSA2029
WR478 / AM390

LRV 26



Antique Walnut
WSA2007
WR341 / AM160

LRV 15



Great Oak
WSA2022
WR339 / AM339

LRV 22

i Plank and film repeat info for Altro Wood, Altro Wood Comfort, Altro Wood Acoustic and Altro Wood adhesive-free

Film	Plank length	Plank width	Repeat
Bleached Oak	2 x 500mm	100mm	1m
Rustic Oak			
Oak Traditions			
Washed Oak			
Manor Oak			
Farmhouse Oak			
Honey Oak			
Sessile Oak			
Autumn Maple	1 x 550mm, 1 x 450mm (Alternating)	100mm	1m
Vintage Cherry			
Seasoned Cherry			
Urban Cherry			
Bavarian Oak			
Antique Walnut			
Spring Maple			
Slate Oak			
Honey Beech	3 x 333.3mm	62.5mm	1m
Castle Oak	1000mm	125mm	1m
Great Oak			
Worn Oak			

Altro recommends conducting a risk assessment to determine if you should install safety, slip-resistant or smooth flooring. Smooth flooring is not recommended in areas with prolonged contaminants present on floor.



Looks great with

- Altro Wood Comfort
- Altro Wood Acoustic
- Altro Wood adhesive-free
- Altro Operetta
- Altro Symphonia
- Altro Walkway 20
- All Altro wall options



Sustainability

- O-phthalate free
- Contains bio-based content
- FloorScore certified and low VOC compliant
- Contributes to LEED

More content online www.altro.com



Samples

Experience has shown that printing cannot reproduce colors accurately. If color choice is critical, please request a sample of the material.

Samples are available on altro.com or through Material Bank.



Altro Wood shown in Slate Oak



800.377.5597 USA 800.565.4658 CAN



support@altro.com



www.altro.com



Altro Wood™ Comfort

Creative Minds International



Altro Wood Comfort is an ideal choice for areas that need to look good while providing comfort underfoot. This 2.85mm thick option offers 15dB sound reduction, which is great for noisy environments such as healthcare and education settings. For an acoustic option, please see Altro Wood Acoustic.

With matching design and color options across this range as well as two other wood-look ranges, you can achieve a consistent look throughout with technical performance tailored to each area's specific needs.

Typical applications

Healthcare, senior living, education, retail, offices, light gym and recreational areas

Features + benefits

- 2.85mm thick
- Provides ample comfort underfoot
- 15dB sound reduction, ideal for noisy environments such as healthcare and educational settings
- Allows coordination with Altro Wood and Altro Wood Acoustic ranges for smooth transition between areas requiring different levels of slip resistance and sound absorption
- Resists up to 1,000 psi indentation
- FloorScore Certified / Low VOCs



Looks great with

- Altro Wood
- Altro Wood Acoustic
- Altro Wood adhesive-free
- Altro Orchestra
- Altro Reliance 25
- All Altro wall options



Sustainability

- O-phthalate free
- Contains bio-based content
- FloorScore certified and low VOC compliant
- Contributes to LEED

More content online www.altro.com



Samples

Experience has shown that printing cannot reproduce colors accurately. If color choice is critical, please request a sample of the material.

Samples are available on altro.com or through Material Bank.



Castle Oak Comfort
WSMSC2816

WR335 / AM335

LRV 51



Washed Oak Comfort
WSMSC2808

WR347 / AM347

LRV 38



Honey Beech Comfort
WSMSC2829

WR462 / AM462

LRV 43



Rustic Oak Comfort
WSMSC2805

WR340 / AM340

LRV 27



Vintage Cherry Comfort
WSMSC2803

WR336 / AM239

LRV 22



Urban Cherry Comfort
WSMSC2804

WR337 / AM337

LRV 17



Autumn Maple Comfort
WSMSC2802

WR339 / AM339

LRV 24

Featured in image left



Antique Walnut Comfort
WSMSC2810

WR341 / AM160

LRV 15



Great Oak Comfort
WSMSC2817

WR339 / AM339

LRV 22



Farmhouse Oak Comf.
WSMSC2811

WR338 / AM338

LRV 38

Altro recommends conducting a risk assessment to determine if you should install safety, slip-resistant or smooth flooring.
Smooth flooring is not recommended in areas with prolonged contaminants present on floor.



LRV = Light reflectance value

Please keep LRVs in mind when selecting flooring for areas with dementia and Alzheimer's patients, seniors or individuals with poor vision.



Color matched weldrods (WR) and mastics (AM) are available. You'll find their product codes under product SKUs.



Altro Wood Comfort achieves 15dB in sound reduction - ISO 10140.



CERTIFIED BY
FSC Global Services

6'7" x 65'5"
2m x 20m

Format
SHEET

Thickness
2.85mm | .11"



Bleached Oak Comfort
WSMSC2801

WR335 / AM335


LRV 52



Slate Oak Comfort
WSMSC2826

WR478 / AM390

LRV 26



Worn Oak Comfort
WSMSC2818

WR322 / AM239

LRV 19



Manor Oak Comfort
WSMSC2809

WR348 / AM348

LRV 7



Oak Traditions Comfort
WSMSC2807

WR353 / AM225

LRV 25



Bavarian Oak Comfort
WSMSC2822

WR514 / AM514

LRV 21



Sessile Oak Comfort
WSMSC2823

WR350 / AM483

LRV 30



Honey Oak Comfort
WSMSC2825

WR352 / AM352

LRV 21

Altro recommends conducting a risk assessment to determine if you should install safety, slip-resistant or smooth flooring.
Smooth flooring is not recommended in areas with prolonged contaminants present on floor.



Looks great with

- Altro Wood
- Altro Wood Acoustic
- Altro Wood adhesive-free
- Altro Orchestra
- Altro Reliance 25
- All Altro wall options



Sustainability

- O-phthalate free
- Contains bio-based content
- FloorScore certified and low VOC compliant
- Contributes to LEED

More content online www.altro.com



Samples

Experience has shown that printing cannot reproduce colors accurately. If color choice is critical, please request a sample of the material.

Samples are available on altro.com or through Material Bank.



Altro Wood Comfort in Farmhouse Oak.



Altro Wood™ Acoustic

Prestonfield Nursery School



Altro Wood Acoustic provides a warm and homey aesthetic with the additional benefit of 19dB sound reduction and an IIC rating of 54, ideal for multi-level construction. At 3.9mm thick, it can tolerate medium to heavy duty traffic and is perfect for environments where people are on their feet often and need comfort underfoot.

With matching design and color options across this range as well as two other wood-look ranges, you can achieve a consistent look throughout with technical performance tailored to each area's specific needs.

Typical applications

Healthcare, senior living, education, retail, offices, light gym and recreational areas

Features + benefits

- Provides ample comfort underfoot
- 3.9mm thick
- 19dB sound reduction
- IIC rating of 54
- Ideal for multi-level construction with medium to heavy traffic between floors
- Allows coordination with Altro Wood and Altro Wood Comfort ranges for smooth transition between areas requiring different levels of slip resistance and sound absorption
- FloorScore Certified / Low VOCs



Looks great with

- Altro Wood
- Altro Wood Comfort
- Altro Wood adhesive-free
- Altro Serenade
- Altro Stronghold 30
- All Altro wall options



Sustainability

- O-phthalate free
- Contains bio-based content
- FloorScore certified and low VOC compliant
- Contributes to LEED

More content online www.altro.com



Samples

Experience has shown that printing cannot reproduce colors accurately. If color choice is critical, please request a sample of the material.

Samples are available on altro.com or through Material Bank.



Slate Oak Acoustic
WSMA37108
WR322 / AM390 LRV 26



Castle Oak Acoustic
WSMA3798
WR335 / AM335 LRV 51

Featured in image left



Farmhouse Oak Acoustic
WSMA3781
WR338 / AM338 LRV 38



Bavarian Oak Acoustic
WSMA37104
WR514 / AM514 LRV 21



Antique Walnut Acoustic
WSMA3782
WR341 / AM160 LRV 15

Altro recommends conducting a risk assessment to determine if you should install safety, slip-resistant or smooth flooring. Smooth flooring is not recommended in areas with prolonged contaminants present on floor.



LRV = Light reflectance value

Please keep LRVs in mind when selecting flooring for areas with dementia and Alzheimer's patients, seniors or individuals with poor vision.



Color matched weldrods (WR) and mastics (AM) are available. You'll find their product codes under product SKUs.



Altro Wood Acoustic achieves 19dB in sound reduction (ISO 10140) and an IIC rating of 54.



6'7" x 65'5"
2m x 20m
Format SHEET
Thickness 3.9mm .15"

Altro Lavencia™



Eagleview Hospital



Attractive looks and lasting durability are not the only traits that make Altro Lavencia the premier LVT for commercial applications — Altro Lavencia is now proudly manufactured in the USA!

Available in an assortment of updated films ranging from classic wood tones, coordinating stones, brights and even modern organic looks, Altro Lavencia is a stylish, low-maintenance option for a host of application areas.

Peak beauty and performance will last through its lifetime, even in areas with consistently heavy traffic, thanks to the commercial-grade UV-cured ceramic reinforced urethane finish and 28 mil wear layer.

Typical applications

Schools, colleges, offices, government buildings, senior living, public housing, apartment communities, retail, dining rooms



Looks great with

- Altro Classic 25
- Altro Reliance 25
- Altro Wood Comfort
- Altro Orchestra
- All Altro wall options



Sustainability

- 100% recyclable
- O-phthalate free
- FloorScore certified and low VOC compliant
- Contributes to LEED

More content online www.altro.com




Samples

Experience has shown that printing cannot reproduce colors accurately. If color choice is critical, please request a sample of the material.

Samples are available on altro.com or through Material Bank.

Features + benefits

- 3mm thick, 28 mil wear layer
- Select SKUs in our budget build (2.5mm/12 mil) - look for the **BB** to see the selections
- UV-cured, ceramic reinforced finish
- Glue-down installation
- Resists up to 2000psi of indentation
- Easy-to-clean, no finish required
- Square edge construction - means no bevel for dirt to hide in
- FloorScore Certified + Ortho-phthalate-free
- Made in the USA
- Custom build options available

				
Pale Persimmon LAV55044	Chateau Nordic LAV13011	Hampton Greige LAV23066	Ansel Oak LAV14044	Persimmon LAV55077
6" x 48"	9.25" x 59.25"	6" x 48" BB	6" x 48"	6" x 48"
				
Barnboard LAV99099	Farm. Heritage LAV66099	Tavern Bourbon LAV99088	Blk. Persimmon LAV55055	Tavern Mesquite LAV55088
9.25" x 59.25"	6" x 48"	9.25" x 59.25"	6" x 48"	9.25" x 59.25"
				
Blonde Oak LAV14033	Scandi Timber LAV99044	Ash Oak LAV14022	Malmo Timber LAV99011	Classic Oak LAV14011
6" x 48"	9.25" x 59.25" BB	6" x 48"	9.25" x 59.25"	6" x 48"

Featured in image left

Plank length	Amount per carton
6" x 48"	18 pieces per carton 36 ft ² per carton
9.25" x 59.25"	10 pieces per carton 38.07 ft ² per carton
12" x 24"	18 pieces per carton 36 ft ² per carton
Grasscloth Linen and Grasscloth Tweed only	16 pieces per carton 32 ft ² per carton



These select colors, up to 20,000 square feet, will process and ship within 3 business days.



These select colors are available in our standard and budget build (2.5mm, 12 mil)

Additional colors of Altro Lavencia LVT on reverse

Altro recommends conducting a risk assessment to determine if you should install safety, slip-resistant or smooth flooring. Smooth flooring is not recommended in areas with prolonged contaminants present on floor.

CERTIFIED BY
FSC Global Services

Format PLANK + TILE
Thickness 3mm .12"





Farm. Smoke
LAV13077

6" x 48"

LRV 26

BB



Oak Butternut
LAV88077

9.25" x 59.25"

LRV 26



Laurel Oak
LAV88011

6" x 48"

LRV 21

BB



Chateau Saddle
LAV13033

6" x 48"

LRV 26



Farm. Whiskey
LAV13066

6" x 48"

LRV 31

BB



Chateau Cellar
LAV13022

6" x 48"

LRV 21



Newfound Oak
LAV14055

6" x 48"

LRV 21



Country Hickory
LAV88033

6" x 48"

LRV 38



Warm Walnut
LAV55022

6" x 48"

LRV 21



Spalted Cherry
LAV88088

6" x 48"

LRV 17



Colonial Oak
LAV14066

6" x 48"

LRV 20



Sienna
LAV88055

6" x 48"


LRV 19



Rosewood
LAV88099

6" x 48"

LRV 12



Afr. Mahogany
LAV88044

6" x 48"

LRV 12



These select colors, up to 20,000 square feet, will process and ship within 3 business days.



These select colors are available in our standard and budget build (2.5mm, 12 mil)



Looks great with

- Altro Classic 25
- Altro Reliance 25
- Altro Wood Comfort
- Altro Orchestra
- All Altro wall options



Sustainability

- 100% recyclable
- O-phthalate free
- FloorScore certified and low VOC compliant
- Contributes to LEED

More content online www.altro.com



Samples

Experience has shown that printing cannot reproduce colors accurately. If color choice is critical, please request a sample of the material.

Samples are available on altro.com or through Material Bank.



Tavern Tobacco
LAV99055

6" x 48"

LRV 17



Vintage Walnut
LAV99077

9.25" x 59.25"

BB

LRV 10



Frontier
LAV23088

6" x 48"

LRV 15



Ant. Burled Oak
LAV88066

6" x 48"

LRV 12



Amer. Redwood
LAV55099

9.25" x 59.25"

LRV 10



Pear
LAV44044

6" x 48"

LRV 37



Amber
LAV44011

6" x 48"

LRV 51



Marmalade
LAV44022

6" x 48"

LRV 24



Crimson
LAV44033

6" x 48"

LRV 12



Cobalt
LAV44055

6" x 48"

LRV 10



Dove
LAV17011

6" x 48"

LRV 37



Tweed
LAV17022

6" x 48"

LRV 22



Alabaster
LAV16033

12" x 24"

LRV 48



Sterling
LAV16022

12" x 24"

LRV 24



Asher
LAV16044

12" x 24"

LRV 10

Plank length	Amount per carton
6" x 48"	18 pieces per carton 36 ft ² per carton
9.25" x 59.25"	10 pieces per carton 38.07 ft ² per carton
12" x 24"	18 pieces per carton 36 ft ² per carton
<i>Grasscloth Linen and Grasscloth Tweed only</i>	16 pieces per carton 32 ft ² per carton

Additional colors of Altro Lavencia LVT on reverse

Altro recommends conducting a risk assessment to determine if you should install safety, slip-resistant or smooth flooring. Smooth flooring is not recommended in areas with prolonged contaminants present on floor.



CEPITRO BY
RCS Global Services

Format
PLANK + TILE
Thickness
3mm | .12"



Grasscloth. Linen
LAV33022

LRV 38

12" x 24"



Grasscloth. Tweed
LAV33033

LRV 34

12" x 24"



Interlace
LAV16099

LRV 26

12" x 24"



Weave
LAV33011

LRV 19

12" x 24"



Weft
LAV33044

LRV 17

12" x 24"



Monterey
LAV16088

LRV 42

12" x 24"



Armor
LAV16077

LRV 34

12" x 24"



Umber
LAV16066

LRV 29

12" x 24"



Cordova
LAV16055

LRV 18

12" x 24"

Plank length	Amount per carton
6" x 48"	18 pieces per carton 36 ft ² per carton
9.25" x 59.25"	10 pieces per carton 38.07 ft ² per carton
12" x 24"	18 pieces per carton 36 ft ² per carton
<i>Grasscloth Linen and Grasscloth Tweed only</i>	16 pieces per carton 32 ft ² per carton



These select colors, up to 20,000 square feet, will process and ship within 3 business days.



These select colors are available in our standard and budget build (2.5mm, 12 mil)



Looks great with

- Altro Classic 25
- Altro Reliance 25
- Altro Wood Comfort
- Altro Orchestra
- All Altro wall options



Sustainability

- 100% recyclable
- O-phthalate free
- FloorScore certified and low VOC compliant
- Contributes to LEED

More content online www.altro.com



Samples

Experience has shown that printing cannot reproduce colors accurately. If color choice is critical, please request a sample of the material.

Samples are available on altro.com or through Material Bank.



Altro Lavencia in Hampton Greige shown.

Altro Quartz Tile™

Winslow Junior High School



Altro Quartz Tile is a homogeneous tile available in chip and marble patterns, providing endless design options for commercial, industrial or public sector applications. Static load testing that exceeds 3000 psi proves Altro Quartz Tile is ideal for heavy pedestrian traffic areas. These tiles are occupancy ready, eliminating the need for initial application of floor finish.

Generate school spirit by pairing logos and colors or improve company morale with vibrant hues that inspire vitality throughout the office.

Typical applications

Schools, hallways, classrooms, cafeterias, lobbies, waiting rooms, retail, supermarkets, cafes, office buildings, general circulation areas, warehouse and industrial areas, forklift trafficked areas

Features + benefits

- Homogeneous construction, available in chip and striated patterns
- Static load limit of 3,000 psi
- Easier and faster to install than VCT
- Occupancy ready, no finish required
- 70% quartz content for extreme durability
- PUR coating – easy to maintain and better cleanability compared to non PUR treated products
- Low VOCs



Looks great with

- Altro Lavencia LVT
- Altro Walkway 20
- Altro Operetta
- Altro Wood
- All Altro wall options



Sustainability

- O-phthalate free
- Contains bio-based content
- Low VOC compliant
- Contributes to LEED

More content online www.altro.com



Samples

Experience has shown that printing cannot reproduce colors accurately. If color choice is critical, please request a sample of the material.

Samples are available on altro.com or through Material Bank.




Sand CD
9322

LRV 46



Sand
9722

LRV 47



Celery CD
9361

LRV 37



Shale CD
9324

LRV 32



Shale
9724

LRV 33



Cream CD
9321

LRV 54



Cream
9721

LRV 54



Latte CD
9323

LRV 30



Latte
9723

LRV 27



Espresso CD
9328

LRV 12

Featured in image left



Chalk CD
9301

LRV 60



Chalk
9701

LRV 58

Featured in image left



Rock Salt CD
9302

LRV 41



Rock Salt
9702

LRV 45



Ice CD
9351

LRV 40

Additional colors of Altro Quartz Tile on reverse

Altro recommends conducting a risk assessment to determine if you should install safety, slip-resistant or smooth flooring. Smooth flooring is not recommended in areas with prolonged contaminants present on floor.


Carton weight	Amount per carton
48 lbs 21.8kg	15 pieces per carton 60 ft² per carton



24" x 24" 61cm x 61cm
Format TILE
Thickness 2mm .08"



Featured in image right



Lemongrass CD 9363 LRV 34




Sunglow CD 9329 LRV 49



Curry CD 9325 LRV 38



Terracotta CD 9344 LRV 21



Firecracker CD 9349 LRV 12



Slate CD 9353 LRV 29



Slate 9753 LRV 22




Ash CD 9303 LRV 26




Ash 9703 LRV 27




Platinum CD 9317 LRV 30



Thunder CD 9318 LRV 20




Steel CD 9304 LRV 17



Charcoal CD 9306 LRV 13



Onyx 9719 LRV 7



Onyx CD 9319 LRV 7

Carton weight	Amount per carton
48 lbs 21.8kg	15 pieces per carton 60 ft² per carton



Looks great with

- Altro Lavencia LVT
- Altro Walkway 20
- Altro Operetta
- Altro Wood
- All Altro wall options



Sustainability

- O-phthalate free
- Contains bio-based content
- Low VOC compliant
- Contributes to LEED

More content online www.altro.com



Samples

Experience has shown that printing cannot reproduce colors accurately. If color choice is critical, please request a sample of the material.

Samples are available on altro.com or through Material Bank.



Fern CD
9367

LRV 25




Moss CD
9366

LRV 21



Ocean CD
9359

LRV 11



Garnet
9770

LRV 13



Emerald
9772

LRV 10



Citrine
9773

LRV 55



Coral
9774


LRV 18



Lapis
9775


LRV 12

Featured in image below



Amethyst
9771

LRV 11



Brick CD
9320

LRV 13

Upper Moreland High School - water jet logo with Altro Quartz Tile



24" x 24" 61cm x 61cm
Format TILE
Thickness 2mm .08"

Altro Ollero™



Altro Ollero is a versatile, durable and eco-friendly rubber flooring solution designed to provide the look of more traditional commercial surfaces such as carpet, stone and even cork. Available in a range of 22 colors with a mixture of solid, speckled, neutral and vibrant tones, these tiles are guaranteed not to curl, harden or crack over time. Their integrated impact and sound absorption properties can help reduce fatigue and excess noise in high traffic areas.

With no need for additional finishes or wax, Altro Ollero is easy to clean and maintain without the use of harsh chemicals, making it a cost efficient option for retail, education and recreational areas. These precision water-jet cut tiles are easy to install and come in a square-edge glue-down format or an adhesive-free interlocking format with four different thickness options.

Typical applications

Retail, leisure, fitness centers, sporting arenas, education, childcare, gymnasiums, museums, libraries, amusement centers

Features + benefits

- Easy-to-clean
- Reduces fatigue
- Impact and sound absorbing
- High SCoF values wet or dry
- Long life expectancy + 10-year warranty
- Guaranteed not to curl
- High traction and durability



Looks great with

- Altro Lavencia
- Altro Reliance 25
- Altro Serenade
- Altro Wood Acoustic
- All Altro wall options



Sustainability

- Up to 90% post-consumer recycled content
- Phthalate-free
- FloorScore certified and low VOC compliant
- Contributes to LEED

More content online www.altro.com



Samples

Experience has shown that printing cannot reproduce colors accurately. If color choice is critical, please request a sample of the material.

Samples are available on altro.com or through Material Bank.




**Piazza
10**

Square - 4 / 8 / 10 / 12mm
Interlocking - 8 / 10 / 12mm



**Arctic
02**

Square - 4 / 8 / 10 / 12mm
Interlocking - 8 / 10 / 12mm




**Mineral
19**

Square - 4 / 8 / 10 / 12mm
Interlocking - 8 / 10 / 12mm



**Ebony
01**

Square - 4 / 8 / 12mm
Interlocking - 8 / 10 / 12mm



**Adobe
20**

Square - 4 / 8 / 10 / 12mm
Interlocking - 8 / 10 / 12mm




**Canvas
04**

Square - 4 / 8 / 10 / 12mm
Interlocking - 8 / 10 / 12mm



**Lunar
12**

Square - 4 / 8 / 10 / 12mm
Interlocking - 8 / 10 / 12mm



**Zeal
22**

Square - 4 / 8 / 10 / 12mm
Interlocking - 8 / 10 / 12mm




**Zen
05**

Square - 4 / 8 / 10 / 12mm
Interlocking - 8 / 10 / 12mm



**Aqua
03**

Square - 4 / 8 / 10 / 12mm
Interlocking - 8 / 10 / 12mm



**Tranquil
16**

Square - 4 / 8 / 10 / 12mm
Interlocking - 8 / 10 / 12mm

Featured in image left



**Horizon
08**

Square - 4 / 8 / 10 / 12mm
Interlocking - 8 / 10 / 12mm

Additional colors of Altro Ollero on reverse

Altro recommends conducting a risk assessment to determine if you should install safety, slip-resistant or smooth flooring. Smooth flooring is not recommended in areas with prolonged contaminants present on floor.



Square tiles

38" x 38"

Glue-down installation



Interlocking tiles

37" x 37"

Adhesive-free installation




37" x 37"
38" x 38"
Format TILE
Thickness 4 / 8 / 10 / 12mm




Electra
18

Square - 4 / 8 / 10 / 12mm
Interlocking - 8 / 10 / 12mm




Aura
21

Square - 4 / 8 / 10 / 12mm
Interlocking - 8 / 10 / 12mm




Wave
14

Square - 4 / 8 / 10 / 12mm
Interlocking - 8 / 10 / 12mm




Astro
17

Square - 4 / 8 / 10 / 12mm
Interlocking - 8 / 10 / 12mm



Pantile
15

Square - 4 / 8 / 10 / 12mm
Interlocking - 8 / 10 / 12mm




Flame
13

Square - 4 / 8 / 10 / 12mm
Interlocking - 8 / 10 / 12mm



Kiln
11

Square - 4 / 8 / 10 / 12mm
Interlocking - 8 / 10 / 12mm

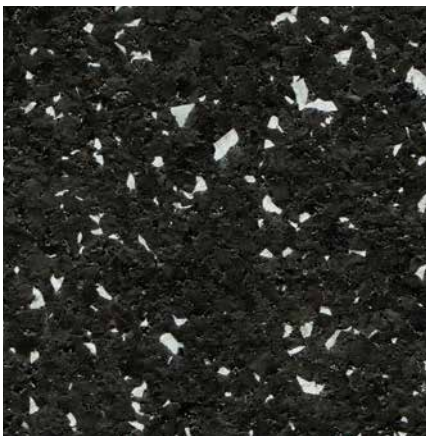

Ore
06

Square - 4 / 8 / 10 / 12mm
Interlocking - 8 / 10 / 12mm



Oasis
09

Square - 4 / 8 / 10 / 12mm
Interlocking - 8 / 10 / 12mm



Serene
07

Square - 4 / 8 / 10 / 12mm
Interlocking - 8 / 10 / 12mm



Looks great with

- Altro Lavencia
- Altro Reliance 25
- Altro Serenade
- Altro Wood Acoustic
- All Altro wall options



Sustainability

- Up to 90% post-consumer recycled content
- Phthalate-free
- FloorScore certified and low VOC compliant
- Contributes to LEED

More content online www.altro.com



Samples

Experience has shown that printing cannot reproduce colors accurately. If color choice is critical, please request a sample of the material.

Samples are available on altro.com or through Material Bank.





Altro Ollero shown in Wave

Altro Dolce™ Tile



Altro Dolce tile combines the natural beauty of stone with the durability and resilience of enhanced vinyl. With its homogeneous pattern construction and a factory-finished PU coating, Altro Dolce will maintain its look throughout the life of the floor.

Altro Dolce is a sustainable flooring option containing 72% pre-consumer recycled content, helping construction projects achieve LEED certification. Installing Altro Dolce in front-of-house areas and Altro safety flooring in heavy duty/back-of-house areas is a very practical decision.

Typical applications

Schools, hallways, classrooms, cafeterias, lobbies, waiting rooms, retail, supermarkets, cafes, office buildings, general circulation areas

Features + benefits

- Homogeneous construction, pattern appears throughout thickness of product
- Balanced color palette with soft marbled looks
- Factory-finished PU coating for easy cleaning and maintenance
- Contains 72% pre-consumer recycled content
- Phthalate-free
- Contains bio-based content
- Tested to withstand 2500 psi
- Low VOCs



Looks great with

- Altro Lavencia LVT
- Altro Walkway 20
- Altro Operetta
- All Altro wall options



Sustainability

- 72% pre-consumer recycled content
- Phthalate-free
- Contains bio-based content
- Low VOC compliant
- Contributes to LEED

More content online www.altro.com



Samples

Experience has shown that printing cannot reproduce colors accurately. If color choice is critical, please request a sample of the material.

Samples are available on altro.com or through Material Bank.



Heilo
AD1101

LRV 70



Taza
AD1113

LRV 59



Castillo
AD1105

LRV 48



Lobo
AD1110


LRV 27



Piedra
AD502

LRV 52

Featured in image left



Dia
AD501

LRV 68



Cemento
AD503

LRV 28



Madrid
AD505

LRV 51



Marmol
AD507

LRV 52



Barcelona
AD508

LRV 56



Playa
AD526

LRV 60



Tierra
AD514

LRV 36




Pastel
AD527

LRV 57



Granito
AD509

LRV 49



Tabaco
AD515

LRV 19

Additional colors of Altro Dolce on reverse

Altro recommends conducting a risk assessment to determine if you should install safety, slip-resistant or smooth flooring. Smooth flooring is not recommended in areas with prolonged contaminants present on floor.

Carton weight	Amount per carton
44.35 lbs 20.12kg	15 pieces per carton 33.75 ft² per carton




18" x 18" 45.7cm x 45.7cm
Format TILE
Thickness 3mm .12"



Murciélago
AD915

LRV 6

Featured in image right



Cielo
AD532

LRV 59

Featured in image right



Agua
AD523


LRV 35



Oceano
AD609

LRV 30

Featured in image right



Rio
AD524

LRV 15

Featured in image right



Lima
AD939

LRV 43



Cilantro
AD605

LRV 38



Árbol
AD941

LRV 12



Plátano
AD933

LRV 52



Mariposa
AD934

LRV 43



Ladrillo
AD511

LRV 19



Picante
AD950

LRV 18



Sangría
AD611

LRV 13



Lavanda
AD952

LRV 10



Noche
AD504

LRV 10

Like vinyl tile?

Check our Altro Dolce's sister product, Altro Dolce Essentials, on altro.com or by scanning the QR code using your smartphone's camera application.



Carton weight	Amount per carton
44.35 lbs 20.12kg	15 pieces per carton 33.75 ft² per carton



Looks great with

- Altro Lavencia LVT
- Altro Walkway 20
- Altro Operetta
- All Altro wall options



Sustainability

- 72% pre-consumer recycled content
- Phthalate-free
- Contains bio-based content
- Low VOC compliant
- Contributes to LEED

More content online www.altro.com



Samples

Experience has shown that printing cannot reproduce colors accurately. If color choice is critical, please request a sample of the material.

Samples are available on altro.com or through Material Bank.



	Altro Symphonia	Altro Operetta	Altro Orchestra	Altro Serenade	Altro Wood
Format	roll	roll	roll	roll	roll
Thickness	2mm .08"	2mm .08"	2.85mm .11"	3.9mm .15"	2mm .08"
Width	2m 6'7"	2m 6'7"	2m 6'7"	2m 6'7"	2m 6'7"
Length	20m 65'5"	20m 65'5"	20m 65'5"	20m 65'5"	20m 65'5"
Weight	4.6 lbs /yd ²	4.9lbs /yd ²	4.79 lbs /yd ²	5.34 lbs /yd ²	4.9 lbs /yd ²
Warranty	10 years	10 years	10 years	10 years	10 years
Slip resistance					
Dynamic Coefficient of Friction	.38 DCoF	.49 DCoF	.49 DCoF	.49 DCoF	.49 DCoF
ASTM D2047 dry / wet	.8 / .9	.7 / .8	.7 / .8	.7 / .8	.79 / .94
DIN 51130	R10	R10	R10	R10	R10
Sound insulation					
ISO 10140	5dB	4dB	15dB	19dB	4dB
IIC rating				54	
Test results					
Static load limit ASTM F970	2000psi	2000psi	1000psi	500psi	2500psi
Surface burning CAN/ULC - S102.2	Tested	Tested	Tested	Tested	Tested
Critical radiant flux ASTM E648	Class 1	Class 1	Class 1	Class 1	Class 1
Smoke generation ASTM E662	Pass	Pass	Pass	Pass	Pass
Cleaning technology					
Altro Easyclean	✓	✓	✓	✓	✓
PU / PUR					
Sustainable attributes					
Recycled content % (pre /post)	0/5	0/0	0/0	0/0	0/0
O-phthalate-free	✓	✓	✓	✓	✓
Low VOC	✓	✓	✓	✓	✓
FloorScore certified	✓	✓	✓	✓	✓
Bio-based content	✓	✓	✓	✓	✓

Altro Wood Comfort	Altro Wood Acoustic	Altro Lavencia LVT	Altro Quartz Tile	Altro Ollero	Altro Dolce
roll	roll	plank/tile	tile	tile	tile
2.85mm .11"	3.9mm .15"	3mm .12"	2mm .08"	4 / 8 / 10 / 12mm	3mm .12"
2m 6'7"	2m 6'7"	varies	24" 61cm	varies	18" 45.7cm
20m 65'5"	20m 65'5"	varies	24" 61cm	varies	18" 45.7cm
4.79 lbs /yd ²	5.34 lbs /yd ²	varies	53 lbs/carton	varies	44.35 lbs/carton
10 years	10 years	20 years	15 years	10 years	10 years
.49 DCoF	.49 DCoF	.22 DCoF	.27 DCoF		.59 DCoF
.79 / .94	.79 / .94	.6	> .6	.85 / 1.01	> .6
R10	R10				
15dB	19dB				
	54			4mm 57 8,10, 12mm 59	
1000psi	500psi	2000psi	3000psi	1000psi	2500psi
Tested	Tested	Tested	Tested	Tested	Tested
Class 1	Class 1	Class 1	Class 1	Class 1	Class 1
Pass	Pass	Pass	Pass	Pass	Pass
✓	✓				
		✓	✓	✓	✓
0/0	0/0	0/0	0/0	0/<90	72/0
✓	✓	✓	✓	✓	✓
✓	✓	✓	✓	✓	✓
✓	✓	✓		✓	
✓	✓		✓		✓



John Coxall Court - Altro Whiterock PopArt digitally printed walls

wall systems

Choosing your wall system solution is simple; it's all about where you need to use it. Will it be a functional, hygienic, watertight installation? Are you looking to protect against scuffs and scratches? Or are aesthetics more important? We have wall systems that suit all of these credentials and more, including digitally printed wall panels to create interiors that are truly spectacular and can be customized to suit your specific design goals.

Wall systems

Why choose walls from Altro?	116
Our wall portfolio	117
Wall products	118
Integrated floor + wall solutions	120
Technical chart	142



Why choose walls from Altro?

Our wall systems were introduced over 35 years ago and have been a market leader ever since. Providing creative freedom to designers, specifiers and end users, our effective, impervious walls systems deliver a safe, hygienic, decorative and fire-compliant wall solution.

Our portfolio includes functional, performance-driven wall protection as well as more decorative options. With a wide range of solutions, we can provide you with complete design flexibility for any environment.



A complete system

What makes us different from our competition? Our system! We don't just supply wall panels - we supply the whole system including accessories, adhesives, tools, installer training classes and the support staff to back them all up.

With multiple methods of joining panels and transitioning from floor to wall, Altro has a wall solution for every application area.

Typical wall system applications

- Shower enclosures and wet areas
- Operating rooms and sterile areas
- Cleanrooms and laboratories
- Commercial kitchens and back-of-house
- Manufacturing and production
- High-traffic areas
- Receptions, lobbies and front-of-house
- Retail and corporate
- Wainscoting, backsplashes and headboards

Functional wall products



Altro Whiterock White + Satins



Altro Whiterock Matte



Altro Puresentials

Decorative wall products



Altro Whiterock Chameleon



Altro Whiterock wall designs



Altro Tegulis

Wall protection



Altro Puraguard

Wall covering



Altro Whiterock PopArt



Altro Whiterock Digiclad



AW Whiteboard



Altro Fortis Titanium 15

Altro Whiterock™

White and Satins

Geisinger Pittston Healthplex



Altro Whiterock provides continuously smooth, impact-resistant wall protection without gaps or grout. It is ideally suited for areas in which hygiene and cleanability are critical, as well as those that require a water-resistant finish.

Designed to integrate with Altro flooring using a seamless, watertight joint, Altro Whiterock panels are capable of being heat formed and bent around corners, pipes and other extrusions. This eliminates the threat of bacteria hiding in accessories, cracks, gaps and inadequate seam treatments that are common with other wall products.

This versatile wall protection provides unmatched durability that can help reduce maintenance costs, avoiding common repairs associated with tile, drywall and paint alternatives.

Typical applications

Wet areas, operating rooms, pharmaceuticals, cleanrooms, sterile areas, manufacturing and production facilities



Looks great with

- Safety flooring
- Slip-resistant flooring
- Adhesive-free flooring
- Smooth flooring



Sustainability

- Phthalate-free
- Emits no VOCs
- Contributes to LEED
- EPD available

More content online www.altro.com



Samples

Experience has shown that printing cannot reproduce colors accurately. If color choice is critical, please request a sample of the material.






Samples are available on altro.com or through Material Bank.

Features + benefits

- Impact-resistant
- Prevents water ingress to substrate
- Heat-weldable and thermoformable on site
- Easy-to-clean, low maintenance costs
- Extremely hygienic
- Emits no VOCs
- Class A fire-rated, CAN/ULC tested
- HACCP approved
- Meets ISO Class 2
- Create an integrated floor and wall solution
- Color matched accessories and trims
- Product specific EPD available



Featured in image left

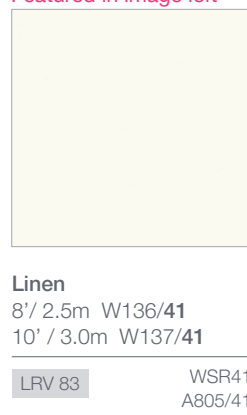**LRV = Light reflectance value**

Please keep LRVs in mind when selecting walls for areas with dementia and Alzheimer's patients, seniors or individuals with poor vision.



Color matched weldrod (WSR) and sanitary sealants (A802 / A805) are available.




Altro Whiterock White and Altro Whiterock Satins are different prices. Satins refers to all colors except Standard White.



4' x 8'2" (2.5m)
4' x 9'10" (3m)

Format
PANEL


Thickness
2.5mm | .10"

**Hessian**

8' / 2.5m W136/**233**
10' / 3.0m W137/**233**

LRV 68


WSR233
A805/233

**Silk**

8' / 2.5m W136/**229**
10' / 3.0m W137/**229**

LRV 68

WSR229
A805/229


**Spa**

8' / 2.5m W136/**232**
10' / 3.0m W137/**232**

LRV 81

WSR232
A805/232

Featured in image right


**Serenity**

8' / 2.5m W136/**227**
10' / 3.0m W137/**227**

LRV 56

WSR227
A805/227


Featured in image right

**Breeze**

8' / 2.5m W136/**228**
10' / 3.0m W137/**228**

LRV 63

WSR228
A805/228


**Blossom**

8' / 2.5m W136/**44**
10' / 3.0m W137/**44**

LRV 78

WSR230
A805/230

Featured in image right

**Blush**

8' / 2.5m W136/**231**
10' / 3.0m W137/**231**

LRV 30

WSR231
A805/231

Featured in image right

**Clay**

8' / 2.5m W136/**224**
10' / 3.0m W137/**224**

LRV 30

WSR224
A805/224

Featured in image right

**Honeydew**

8' / 2.5m W136/**225**
10' / 3.0m W137/**225**

LRV 59

WSR225
A805/225

**Twilight**

8' / 2.5m W136/**226**
10' / 3.0m W137/**226**

LRV 12

WSR226
A805/226

**Looks great with**

- Safety flooring
- Slip-resistant flooring
- Adhesive-free flooring
- Smooth flooring

**Sustainability**

- Phthalate-free
- Emits no VOCs
- Contributes to LEED
- EPD available

More content online www.altro.com

**Samples**

Experience has shown that printing cannot reproduce colors accurately. If color choice is critical, please request a sample of the material.

Samples are available on altro.com or through Material Bank.





An integrated floor and wall solution

Altro Whiterock is an integrated solution, meaning it fits together perfectly to provide a hygienic, watertight surface that's ideal for designing a sterile field. This doesn't just offer the best possible protection against bacteria and contamination; it makes cleaning easy too.

Easy-to-clean

Effective detailing + accessories

Fully sealed

Thermoformed on-site

Heat-welded joints

High impact resistance

Easy to keep clean

Together, our products provide a robust, hard-wearing surface that resists stains, odors and chemicals. PVC is non-porous, non-shedding, and has very high impact resistance, preventing damage that can trap bacteria compared to traditional surfaces.

Fully sealed

Altro Whiterock is a fully-bonded system with hygienic sealed edges, abutments and joints. It can even be sealed around fixtures and fittings.

When joined together with Altro flooring, our wall panels form a watertight covering - from floor to ceiling.

Thermoforming

Because our wall panels can be molded around corners on-site, they form an uninterrupted surface that's resistant to impact and damage. There's no need for unsightly corner trims which can form potential dirt traps that are difficult to access and clean.

Joint forces

Joints and junctions are a key part of system integrity. For instance, did you know that traditional flooring cap trims used with resilient flooring forms a ledge that is not USP 797/800 compliant?

While we have multiple joining methods, we recommend heat welding for all wall joints and overlapping for wall-to-floor transitions in hygienic areas.



Thermoformed corners
No unsightly trims

Heat-welded joints
Fully-sealed, seamless joining



Cove stick
For a smooth transition
up the wall

Wall overlaps floor
Typical installation



Rockville General Hospital's behavioral and mental health ward chose Altro Whiterock, Altro Aquarius and Altro Walkway 20

Altro Whiterock™ Matte

Livability Spinal Injury Center



Doors and plaster board walls can easily be damaged, whether by scrapes and knocks as people pass, or more serious dents and holes caused by wheeled traffic. Altro Whiterock Matte has been specifically designed to protect these surfaces. Altro Whiterock Matte is dense, impervious and resistant to bumps. It features a lightly-textured surface and homogeneous color which camouflages scuffs and scratches, keeping the wall area looking better longer.

With an impervious, easy-to-wipe surface, Altro Whiterock Matte improves cleanability, which is a major advantage within its recommended application areas.

Typical applications

High-traffic areas, corridors, food manufacturing, back-of-house, showers and spas



Looks great with

- Safety flooring
- Slip-resistant flooring
- Adhesive-free flooring
- Smooth flooring



Sustainability

- Phthalate-free
- Emits no VOCs
- Contributes to LEED
- EPD available

More content online www.altro.com



Samples

Experience has shown that printing cannot reproduce colors accurately. If color choice is critical, please request a sample of the material.

Samples are available on altro.com or through Material Bank.

Features + benefits


- Impact-resistant
- Lightly textured, matte finish camouflages superficial scuffs and scratches
- Prevents water ingress to substrate
- Heat-weldable and thermoformable on site
- Easy-to-clean, low maintenance costs
- Extremely hygienic
- Emits no VOCs
- Class A fire-rated, CAN/ULC tested
- Create an integrated floor and wall solution
- Color matched accessories and trims
- Product specific EPD available




Featured in image above




Battleship
10' / 3.0m W151/FT208
LRV 43 WSR208
A805/208




Tan
10' / 3.0m W151/FT206
LRV 41 WSR206
A805/206



Almond
10' / 3.0m W151/FT32
LRV 70 WSR32
A805/32



Pearl
10' / 3.0m W151/FT41
LRV 83 WSR41
A805/41



Denim
10' / 3.0m W151/FT201
LRV 32 WSR201
A805/201



LRV = Light reflectance value

Please keep LRVs in mind when selecting walls for areas with dementia and Alzheimer's patients, seniors or individuals with poor vision.



Color matched weldrod (WSR) and sanitary sealants (A805) are available.



Our wall portfolio varies greatly in pricing from product to product. Please ask your local sales representative for accurate pricing.



4' x 9'10" (3m)
Format PANEL
Thickness 2.5mm .10"

Altro Puressentials



Introducing Altro Puressentials - the innovative wall cladding system that meets your commercial durability, cleanability, and hygiene needs yet is a game-changer in terms of sustainability. It is the ideal solution for areas that require PVC-free wall cladding options.

Altro Puressentials has a smooth, matte surface that emulates the appearance of paint. Alternatively, you can choose to install the reverse side of the panels for a high-sheen, polished aesthetic. Whichever finish you select, you can be sure that Altro Puressentials will create a durable and long-lasting surface that's easy to clean and maintain while protecting against scuffs, stains, and fungal growth.

Typical applications

Critical hygiene and healthcare areas, operating rooms, central sterile, laboratories, cleanrooms, medical device rooms, pharmacies, any application that requires a PVC-free wall panel

Features + benefits

- PVC-free, PETG construction
- Halogen-free
- BPA-free
- Low VOC, meets CA 01350
- Meets UL safety certification requirements
- Easy-to-clean
- Resists stains, chemicals and fungi
- Thermoformable on-site
- Joins with heat-welding or instant glue stick methods
- Double sided product* - choose matte or high-sheen



Looks great with

- Safety flooring
- Slip-resistant flooring
- Adhesive-free flooring
- Smooth flooring



Sustainability

- PVC-free
- Halogen-free
- BPA-free
- Low VOCs
- Contributes to LEED

More content online www.altro.com



Samples

Experience has shown that printing cannot reproduce colors accurately. If color choice is critical, please request a sample of the material.


Samples are available on altro.com

**Chiffon**

8' / 2.5m W110/**8253**
 10' / 3.0m W111/**8253**

LRV 71

WSR53
 A805/53


**Organza**

8' / 2.5m W110/**8643**
 10' / 3.0m W111/**8643**

LRV 81

WSR43
 A805/43


Featured in image left

**Modal**

8' / 2.5m W110/**8341**
 10' / 3.0m W111/**8341**

LRV 83


WSR41
 A805/41

**Chenille**

8' / 2.5m W110/**8432**
 10' / 3.0m W111/**8432**

LRV 70

WSR32
 A805/32

**Twill**

8' / 2.5m W110/**85206**
 10' / 3.0m W111/**85206**

LRV 41

WSR206
 A805/206

**LRV = Light reflectance value**

Please keep LRVs in mind when selecting walls for areas with dementia and Alzheimer's patients, seniors or individuals with poor vision.



Color matched weldrod (WSR), sanitary sealant (A805) and glue sticks are available.



Our wall portfolio varies greatly in pricing from product to product. Please ask your local sales representative for accurate pricing.



4' x 8' (2.44m)
 4' x 10' (3.05m)

Format
 PANEL

Thickness
 2mm | .08"



Altro Whiterock Chameleon

Mayim Aquatic Centre



Make a bold statement with Altro Whiterock Chameleon – the glossy, vibrant and vividly colorful wall cladding. Altro Whiterock Chameleon is available in 13 high-impact, high-design shades to add a little bit of affordable luxury to a range of environments.

Offering all the benefits of Altro Whiterock, Altro Whiterock Chameleon is durable with a smooth, watertight, wipe-clean surface.

Typical applications

High-end bathrooms, showers and changing areas, reception, lobbies, serveries, retail, backsplashes

Features + benefits

- Glossy, vibrant looks
- Create striking aesthetic appeal
- Impact-resistant
- Prevents water ingress to substrate
- Heat-weldable and thermoformable on site
- Easy-to-clean, low maintenance costs
- Extremely hygienic
- Class A fire-rated, CAN/ULC tested
- Emits no VOCs
- Create an integrated floor and wall solution
- Color matched accessories and trims



Looks great with

- Safety flooring
- Slip-resistant flooring
- Adhesive-free flooring
- Smooth flooring



Sustainability

- Phthalate-free
- Emits no VOCs
- Contributes to LEED

More content online www.altro.com



Samples

Experience has shown that printing cannot reproduce colors accurately. If color choice is critical, please request a sample of the material.

Samples are available on altro.com or through Material Bank.



Liquorice
10' / 3.0m W161/6612

LRV 5	WSR6612 A805/6612
-------	----------------------



Distant Thunder
10' / 3.0m W161/6634

LRV 18	WSR6634 A805/6634
--------	----------------------



Pure Innocence
10' / 3.0m W161/6601

LRV 92	WSR01 A802
--------	---------------

Featured in image left



Eau De Chic
10' / 3.0m W161/6605

LRV 48	WSR6605 A805/6605
--------	----------------------



Sheer Glass
10' / 3.0m W161/6609


LRV 40	WSR6609 A805/6609
--------	----------------------



Nightfall
10' / 3.0m W161/6622

LRV 15	WSR6622 A805/6622
--------	----------------------

Featured in image left



Slip Stream
10' / 3.0m W161/6611

LRV 36	WSR6611 A805/6611
--------	----------------------



Hawaiian Palm
10' / 3.0m W161/6638

LRV 22	WSR6638 A805/6638
--------	----------------------

Featured in image left



Taxi Cab
10' / 3.0m W161/6636

LRV 58	WSR6636 A805/6636
--------	----------------------



Juicy Lucy
10' / 3.0m W161/6620

LRV 20	WSR6620 A805/6620
--------	----------------------



Moulin Rouge
10' / 3.0m W161/6618

LRV 12	WSR6618 A805/6618
--------	----------------------



Feng Shui
10' / 3.0m W161/6617

LRV 9	WSR6617 A805/6617
-------	----------------------

Featured in image left



Shocking Pink
10' / 3.0m W161/6616

LRV 15	WSR6616 A805/6616
--------	----------------------

8'2" panels are available with minimum quantity orders - speak to your local Altro representative for details.



LRV = Light reflectance value

Please keep LRVs in mind when selecting walls for areas with dementia and Alzheimer's patients, seniors or individuals with poor vision.



Color matched weldrod (WSR) and sanitary sealants (A802 / A805) are available.



Our wall portfolio varies greatly in pricing from product to product. Please ask your local sales representative for accurate pricing.



4' x 9'10" (3m)
Format PANEL
Thickness 2.5mm .10"



Altro Whiterock™ wall designs

Holy Name Medical Center



Altro Whiterock wall designs combine the durability, hygiene and resilience of Altro Whiterock wall panels with striking patterns sure to enhance today's contemporary, commercial interiors.

The attractive palette of wood, linen, and concrete visuals ensure these decorative wall panels will shine in even in the most inspirational front-of-house settings.

Altro Whiterock wall designs coordinate exceptionally well with our flooring, providing designers, specifiers and end users an extensive suite of creative options all under the Altro name.

Typical applications

Front-of-house, healthcare, senior living, hospitality, education, lobbies, reception, leisure, headboards, backsplashes



Looks great with

- Safety flooring
- Slip-resistant flooring
- Adhesive-free flooring
- Smooth flooring



Sustainability

- Phthalate-free
- Emits no VOCs
- Contributes to LEED

More content online www.altro.com




Samples

Experience has shown that printing cannot reproduce colors accurately. If color choice is critical, please request a sample of the material.

Samples are available on altro.com or through Material Bank.

Features + benefits


- Modern pattern looks
- Create striking aesthetic appeal
- Impact-resistant
- Prevents water ingress to substrate
- Heat-weldable and thermoformable on site
- Easy-to-clean, low maintenance costs
- Extremely hygienic
- Emits no VOCs
- Class A fire-rated, CAN/ULC tested
- Create an integrated floor and wall solution
- Contrasting accessories and trims

**Winter Weave**

8' / 2.5m WDS25/9909
10' / 3.0m WDS30/9909

LRV 58


WSR9909
A805/9909

**Autumn Weave**

8' / 2.5m WDS25/9910
10' / 3.0m WDS30/9910

LRV 43

WSR9910
A805/9910

**Summer Weave**

8' / 2.5m WDS25/9908
10' / 3.0m WDS30/9908

LRV 36

WSR9908
A805/9908

**White Mineral**

8' / 2.5m WDS25/9905
10' / 3.0m WDS30/9905

LRV 61

WSR9905
A805/9905

**Cool Mineral**

8' / 2.5m WDS25/9906
10' / 3.0m WDS30/9906

LRV 48

WSR9906
A805/9906

**Urban Mineral**

8' / 2.5m WDS25/9907
10' / 3.0m WDS30/9907

LRV 28

WSR9907
A805/9907

**Soft Woodgrain**

8' / 2.5m WDS25/9901
10' / 3.0m WDS30/9901

LRV 52

WSR9901
A805/9901

**Warm Woodgrain**

8' / 2.5m WDS25/9904
10' / 3.0m WDS30/9904

LRV 38

WSR9904
A805/9904

Featured in image left

**Rich Woodgrain**

8' / 2.5m WDS25/9902
10' / 3.0m WDS30/9902

LRV 14

WSR9902
A805/9902

*Look out for new
visuals coming soon!*

For product information and
inspirational imagery please read
our brochure or visit altro.com

**LRV = Light reflectance value**

Please keep LRVs in mind when selecting walls for areas with dementia and Alzheimer's patients, seniors or individuals with poor vision.



Color matched weldrod (WSR) and sanitary sealants (A802 / A805) are available.



Our wall portfolio varies greatly in pricing from product to product. Please ask your local sales representative for accurate pricing.



4' x 8'2" (2.5m)
4' x 9'10" (3m)

Format
PANEL

Thickness
2.5mm | .10"

Altro Tegulis™



Stonehill College



For a sophisticated space, create your own style with ease. Altro Tegulis is an innovative wall solution available in an extensive color and design palette. With a chic look and feel of tile, the custom-etched grout lines offer a hygienic solution eliminating scrubbing and repair issues. This easy-to-install system is available in interlocking and straight-edge formats with a variety of tile sizes capable of adapting to different designs.

Unlike traditional porous grout used in ceramic tile installations, the grout lines embedded into Altro Tegulis' surface are impervious to moisture. Using our half lap installation method combined with our sanitary sealant, Altro Tegulis prevents water and bacteria from penetrating below the surface, allowing for thorough cleaning and disinfecting. This provides an authentic tiled visual, without any of the unhygienic drawbacks.

Features + benefits

- Extensive color + pattern palette
- Etched grout lines maintain hygiene
- Resists bacterial growth
- Non-porous, hydrophobic
- Class A fire-rated, CAN/ULC tested
- Emits no VOCs
- Lead-free, phthalate-free

Typical applications

Residential healthcare, multi-family residential, shower enclosures, tub rooms, bathrooms, backsplash, focal walls, kitchenettes



Looks great with

- Safety flooring
- Slip-resistant flooring
- Adhesive-free flooring
- Smooth flooring



Sustainability

- Phthalate-free
- Emits no VOCs
- Contributes to LEED

More content online www.altro.com




Samples

Experience has shown that printing cannot reproduce colors accurately. If color choice is critical, please request a sample of the material.


Samples are available on altro.com




Chevron
2.9" x 5.325"




Hexagon
4.25" x 4.95"




1" Mosaic
1" x 1"




2" Mosaic
2" x 2"




4" Square Tile
4" x 4"




3" x 6" Subway Tile
3" x 6"




4" x 10" Subway Tile
4" x 10"




3" x 12" Subway Tile
3" x 12"



Stacked Tile
3" x 12"



Stacked Tile
8" x 12"



Create your own
Any size

Featured in image left



Herringbone
3" x 6" on the diagonal

For full product details and information please read our brochure or visit altro.com



LRV = Light reflectance value

Please keep LRVs in mind when selecting walls for areas with dementia and Alzheimer's patients, seniors or individuals with poor vision.



Color matched weldrods, sanitary sealants and accessories are available.



Our wall portfolio varies greatly in pricing from product to product. Please ask your local sales representative for accurate pricing.



*4' x 8'2" (2.5m)
*4' x 9'10" (3m)

Format
PANEL

Thickness
2.5mm | .10"



Altro Whiterock™ PopArt



Altro Whiterock PopArt allows you to reproduce custom images and artwork onto Altro Whiterock wall panels to create durable, vibrant design options for a variety of applications.

Available as a completely custom product, print with your own imagery or choose from a wide variety of preselected standard imagery that can easily adapt to your design's specific needs. From scenic landscapes and inspirational architecture to intricate geometric patterns, we have multiple looks that can help make a bold impact, impress clientele or even create calm, soothing settings for patients.

Altro Whiterock PopArt is manufactured locally in North America and has a lead-time upwards of 6 weeks.

Typical applications

Healthcare, senior living, pediatrics, education, athletics, hospitality, lobbies and reception, corporate and offices, leisure, general areas



Looks great with

- Safety flooring
- Slip-resistant flooring
- Adhesive-free flooring
- Smooth flooring



Sustainability

- Phthalate-free
- Emits no VOCs
- Contributes to LEED

More content online www.altro.com



Samples

Experience has shown that printing cannot reproduce colors accurately. If color choice is critical, please request a sample of the material.

Samples are available on altro.com

Choose your format

Altro Whiterock PopArt is available in three different formats, including two protective film options that can adapt to your design's specific needs.

- **Lite** - no protective film and is best used in low-traffic areas that do not require the use of disinfectants, 1-year warranty
- **Matte** - a protective matte film that resists common scuffs and scratches, 5-year warranty
- **Gloss+** - a graffiti and chemical-resistant, dry-erase film that offers a high level of surface protection, 10-year warranty, and coordinating accessories and trims


Altro Whiterock PopArt Lite

Your image is digitally printed onto Altro Whiterock™ without the use of any optional protective films, suitable for low-traffic areas where damage to the panel is unlikely.



Altro Whiterock PopArt Matte

After printing, a protective matte finish film is applied over the surface of the printed Altro Whiterock™ panel.

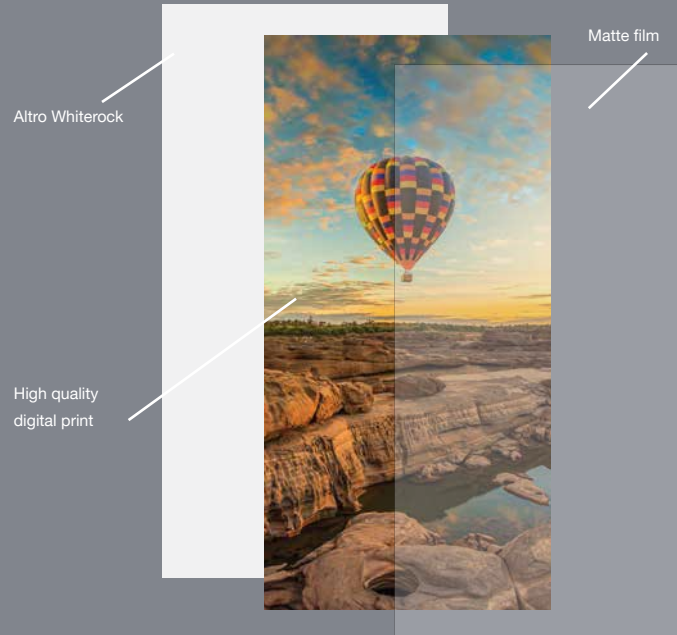

Altro Whiterock PopArt Gloss+

Our damage-resistant option - after printing, a high-gloss graffiti-resistant dry-erase film is applied over the panel. Your printed panels are also now usable as a writeable whiteboard surface.



For full product details, information and our standard image collection please read our brochure or visit altro.com



warranty
varies



4' x 8'2" (2.5m)
4' x 9'10" (3m)

Format
PANEL

Thickness
2.5mm | .10"

Altro Whiterock™ Digiclad

Calgary Cancer Center



Similar to our Altro Whiterock PopArt product, Altro Whiterock Digiclad allows you to create the right impression with a custom design on your wall. From a calming coastal landscape in a hospital ward to a bold company logo in a reception area, the only limit is your imagination.

Altro Whiterock Digiclad is created by reproducing vector artwork (or an extremely high-resolution photograph) onto Altro Whiterock wall panels. Hard-coat technology provides scratch-resistant properties for added surface protection.

Altro Whiterock Digiclad utilizes the same standard image gallery as Altro Whiterock PopArt. It has a lead-time upwards of 14 weeks following your initial order and ships from the UK.

Typical applications

Healthcare, senior living, pediatrics, education, athletics, hospitality, lobbies and reception, corporate and offices, leisure, general areas



Looks great with

- Safety flooring
- Slip-resistant flooring
- Adhesive-free flooring
- Smooth flooring



Sustainability

- Phthalate-free
- Emits no VOCs
- Contributes to LEED

More content online www.altro.com



Samples

Experience has shown that printing cannot reproduce colors accurately. If color choice is critical, please request a sample of the material.


Samples are available on altro.com

Features + benefits


- Liquid hard-coat protects image from scuffs
- Create striking aesthetic appeal
- Provide your own imagery or select from our standard image gallery
- Prevents water ingress to substrate
- Heat-weldable and thermoformable on site
- Easy-to-clean, low maintenance costs
- Extremely hygienic
- Emits no VOCs
- Class A fire-rated, CAN/ULC tested
- Create an integrated floor and wall solution
- Coordinating accessories and trims including printed joint strips

Altro Whiterock Digiclad

After printing, a protective liquid hard-coat is applied over the surface of the printed Altro Whiterock™ panel. Curing time and freight from the UK make for a longer overall production time.

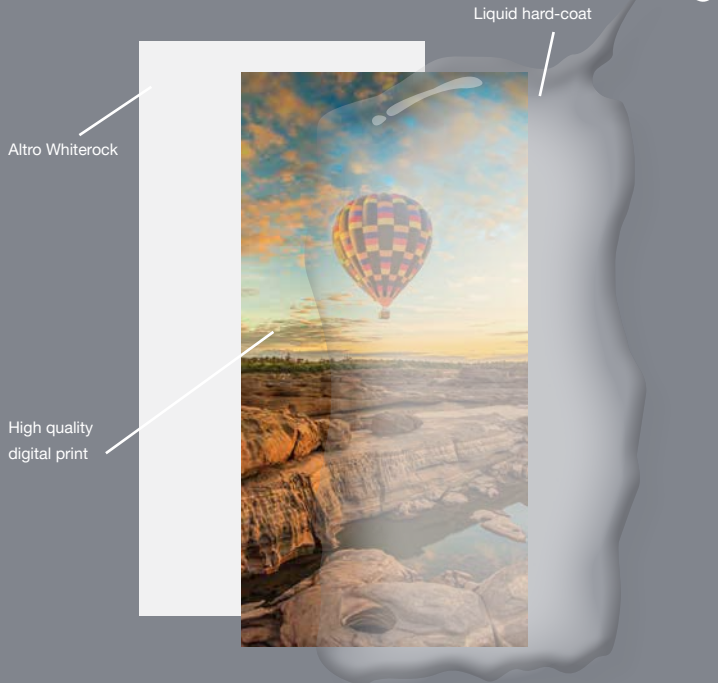

For full product details, information and our standard image collection please read our brochure or visit altro.com

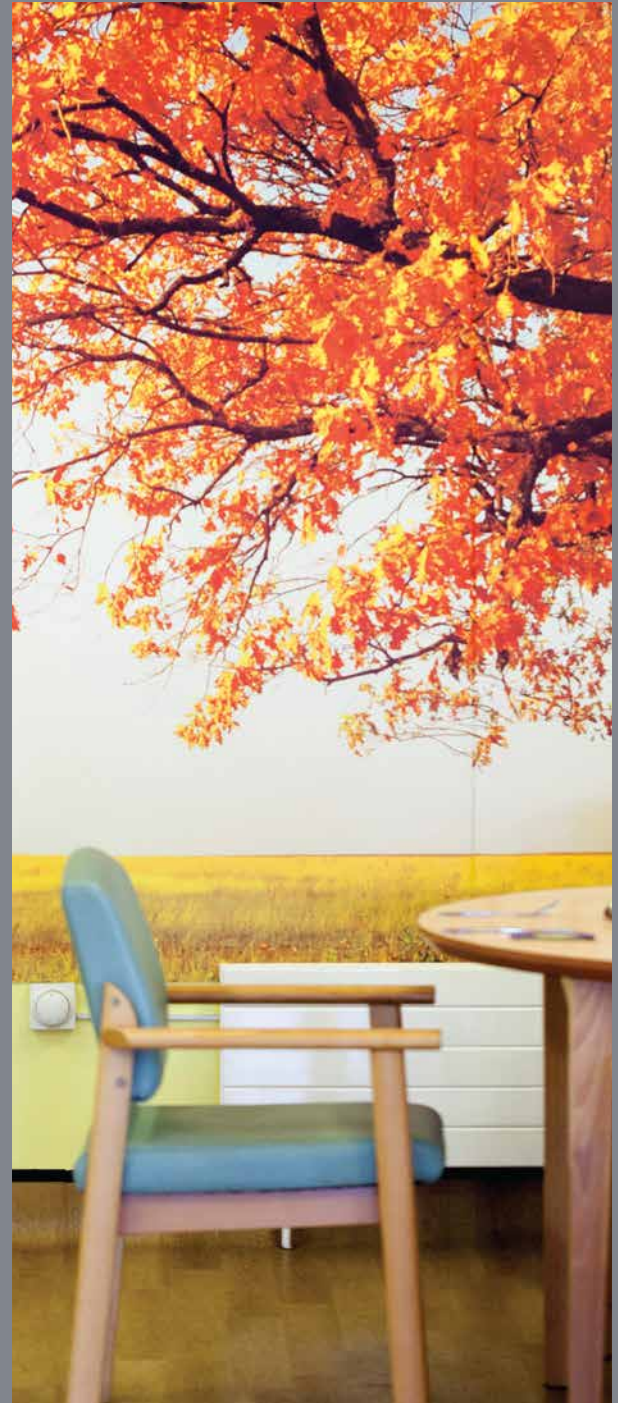

Gossoms End Hospital



4' x 8'2" (2.5m)
4' x 9'10" (3m)

Format
PANEL

Thickness
2.5mm | .10"

Altro Whiterock™ Whiteboard



Altro Whiterock Whiteboard is a premium clear dry-erase coating that allows for any Altro wall panel to be turned into a custom dry-erase board.

The chemical and scratch-resistant clear gloss surface safeguards against ghosting and staining from ink as well as graffiti. When compared to other dry-erase boards, Altro Whiterock Whiteboard is remarkably easier to erase.

Its anti-graffiti properties also allow for easy removal of permanent marker with rubbing alcohol.

Typical applications

Operating rooms, nurses' stations, patient rooms, boardrooms, chef boards, education, daycare

Features + benefits

- Durable overlamine film - 2mil thick
- 10-year warranty
- No ghosting
- Graffiti-resistant
- Class A fire-rated, CAN/ULC tested
- Resists scratches, abrasion, water damage, and corrosion from solvents, stains, and chemicals
- Blends the durability and hygiene of Altro Whiterock with versatility of dry-erase
- Integrates with other Altro Whiterock panels allowing for designated areas to be dry-erase capable



Sustainability

- Phthalate-free
- Emits no VOCs
- Contributes to LEED

More content online www.altro.com



Samples

Experience has shown that printing cannot reproduce colors accurately. If color choice is critical, please request a sample of the material.

Samples are available on altro.com



4' x 8'2" (2.5m)
4' x 9'10" (3m)

Format
PANEL

Thickness
2.5mm | .10"



Altro Whiterock™ Recessed Shelf

Shower installation featuring Altro Tegulis with Altro Whiterock Recessed Shelf



To complement Altro Whiterock in shower areas, we are now offering prefabricated, factory-formed, recessed shelf units. Made from the exact same material as Altro Whiterock wall panels, these shower units are ideally suited for mental health installations. They are recessed into the drywall and heat-welded flush to the adjoining wall panel, making them an extremely hygienic, smooth solution and ideal for use in healthcare, senior living, and mental health facilities.

Seamed flush to the wall with no ledges or lips to grab hold of, the system is tamper-resistant and free from potential ligature points.

Typical applications

Showers in healthcare, senior living, behavioral health and leisure areas



Please inquire with your local Altro representative about additional color availability with minimum order quantities.



Sustainability

- Phthalate-free
- Emits no VOCs
- Contributes to LEED

More content online www.altro.com

Features + benefits

- Integrates with Altro Whiterock panel
- Available in four colors that match Altro Whiterock - Standard White, Linen, Oyster and Fawn.
- Extremely hygienic
- Easy-to-clean
- Recessed into the wall
- Flush heat welding
- Tamper-resistant
- Free from ligature points



16" x 16" outside
10" x 10" inside
Format INSERT
Thickness 2.3mm .09"

Altro Puraguard™

Fox Meadows Creamery



Create a complete floor and wall solution for back-of-house areas by combining Altro Puraguard wall panels and accessories with Altro safety flooring. The easy-maintenance, hygienic PVC surface will help you assure that your kitchen is clean and that food is safe for consumption. Better yet, Altro Puraguard has become the in-demand, economically priced wall protection product for back-of-house areas and is a great alternative to FRP.

Say goodbye to cracked tiles! Altro Puraguard is durable and can prevent damage to walls from moving carts, bumps and dings. Its homogeneous throughout coloring camouflages scuffs so your kitchen stays looking new longer.

Typical applications

Commercial kitchens, food prep, service areas, back-of-house areas, janitorial closets

Features + benefits

- High stain and chemical resistance
- Durable system accessories
- Fully bonded to substrate
- No glass fibers
- Impervious to water ingress
- Withstands robust cleaning procedures including pressure washing
- Resists mold and fungi growth
- Meets USDA, FDA and CFIA standards
- Class A fire-rated, CAN/ULC tested
- Non-porous, non-shedding
- Product specific EPD available



Looks great with

- Safety flooring
- Slip-resistant flooring



Sustainability

- Phthalate-free
- Emits no VOCs
- Contributes to LEED
- EPD available

More content online www.altro.com



Samples

Experience has shown that printing cannot reproduce colors accurately. If color choice is critical, please request a sample of the material.

Samples are available on altro.com



Featured in image above



Salt
9' / 2.75m **W139**
10' / 3.0m **W135**

LRV 89

A802



Sea Salt
9' / 2.75m **W140/400**
10' / 3.0m **W141/400**

LRV 89

A802



Barley
9' / 2.75m **W140/300**
10' / 3.0m **W141/300**

LRV 55

A805/32

For full product details and
information please read our
brochure or visit altro.com



Pepper
9' / 2.75m **W140/301**
10' / 3.0m **W141/301**

LRV 36

A805/208

**LRV = Light reflectance value**

Please keep LRVs in mind when selecting walls for areas with dementia and Alzheimer's patients, seniors or individuals with poor vision.



Color matched sanitary sealants and accessories are available.



Our wall portfolio varies greatly in pricing from product to product. Please ask your local sales representative for accurate pricing.



4' x 9' (2.75m)
4' x 10' (3m)

Format
PANEL

Thickness
2mm | .08"

Altro Fortis Titanium™ 15



Walls in commercial buildings can easily be scraped and bumped as people pass, or more serious dents can occur from wheeled traffic such as hospital beds and moving carts. Altro Fortis Titanium 15 has been specifically designed to shield drywall in these busy spaces while offering a quick and simple installation that does not require any specialty training.

Altro Fortis Titanium 15 is a full system that includes durable panels, easy-to-apply adhesive, color-matched sealant, and prefabricated corners. You don't need to be a skilled wall cladding installer to perform a quality installation of Altro Fortis Titanium 15. In fact, skilled laborers, drywallers, and maintenance staff will find the system quick and easy - saving the end-user considerable time and money.

Typical applications

Corridors, utility areas, back-of-house, headwalls

Features + benefits

- Complete wall covering system with prefabricated corners, adhesives and color matched sealants
- Free of unsightly connector pieces for a clean, aesthetically pleasing appearance
- Reduces repair and maintenance time and costs while keeping commercial interiors looking new and fresh
- Thermoformable on-site by trained installers but is not required for install
- Twenty-year limited product warranty
- Class A fire-rated, CAN/ULC tested
- Non-porous, non-shedding
- Product specific EPD available



Looks great with

- Safety flooring
- Slip-resistant flooring



Sustainability

- Phthalate-free
- Emits no VOCs
- Contributes to LEED
- EPD available

More content online www.altro.com



Samples

Experience has shown that printing cannot reproduce colors accurately. If color choice is critical, please request a sample of the material.

Samples are available on altro.com



Candle
Panels W150/FT05
Sealant A805/05

LRV 85



Ivory
Panels W150/FT04
Sealant A805/04

LRV 78



Cotton
Panels W150/FT06
Sealant A805/06

LRV 83

Featured in image left




Smoke
Panels W150/FT02
Sealant A805/02

LRV 37



Granite
Panels W150/FT01
Sealant A805/01


LRV 20



Latte
Panels W150/FT03
Sealant A805/03

LRV 58

For full product details and information please read our brochure or visit altro.com

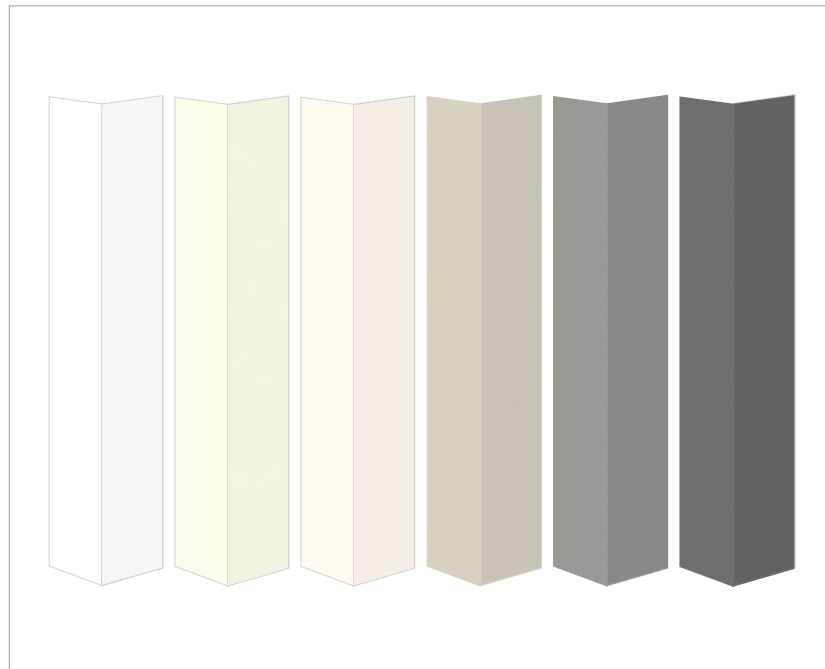

Prefabricated corners

External and internal options available.

6" x 6" x 48" or 6" x 6" x 118"

See SKU charts below.

48" prefabricated corners	Internal	External
Candle	A526/12/05	A539/12/05
Ivory	A526/12/04	A539/12/04
Cotton	A526/12/06	A539/12/06
Latte	A526/12/03	A539/12/03
Smoke	A526/12/02	A539/12/02
Granite	A526/12/01	A539/12/01

118" prefabricated corners	Internal	External
Candle	A526/30/05	A539/30/05
Ivory	A526/30/04	A539/30/04
Cotton	A526/30/06	A539/30/06
Latte	A526/30/03	A539/30/03
Smoke	A526/30/02	A539/30/02
Granite	A526/30/01	A539/30/01

118" options are available as a special order only. Please allow 4-6 weeks for fabrication turnaround time. Must order in increments of 4.



LRV = Light reflectance value

Please keep LRVs in mind when selecting walls for areas with dementia and Alzheimer's patients, seniors or individuals with poor vision.



Color matched sanitary sealants and accessories are available.



Our wall portfolio varies greatly in pricing from product to product. Please ask your local sales representative for accurate pricing.



4' x 9'10" (3m)
Format PANEL
Thickness 1.5mm .06"

	Altro Whiterock	Altro Whiterock Matte	Altro Puressentials	Altro Whiterock Chameleon	Altro Whiterock wall designs
Format	panel	panel	panel	panel	panel
Thickness	2.5mm	2.5mm	2mm	2.5mm	2.5mm
Width	4' / 1.22m	4' / 1.22m	4' / 1.22m	4' / 1.22m	4' / 1.22m
Height	8' 2" / 2.5m 9'10" / 3.0m	9'10" / 3.0m	8' / 2.44m 10' / 3.05m	9'10" / 3.0m	8' 2" / 2.5m 9'10" / 3.0m
Weight	8'2" - 23.59lbs 9'10" - 28.22lbs	9'10" - 28.22lbs	8' - 16.605lbs 10' - 20.757lbs	9'10" - 28.22lbs	8'2" - 24.20lbs 9'10" - 28.57lbs
Warranty	20 years	20 years	10 years	20 years	10 years

Test results

Surface burning CAN/ULC S102.1 + S102.2	Tested				
Surface burning ASTM E84-08	Class A	Class B	Class A		
Impact resistance ASTM D5420	Exceeds 198 inch pounds	Tested	Exceeds 198 inch pounds		
USDA	Compliant		Compliant		
FDA	Compliant		Compliant		
CFIA	Compliant		Compliant		

Sustainable attributes

Phthalate-free	✓	✓	✓	✓	✓
Low VOC	✓	✓	✓	✓	✓

Altro Tegulis	Altro Whiterock PopArt	Altro Whiterock Digiclad	Altro Whiterock Whiteboard	Altro Puraguard	Altro Fortis Titanium 15
panel	panel	panel	panel	panel	panel
2.5mm	2.5mm	2.5mm	2.5mm	2mm	1.5mm
4' / 1.22m	4' / 1.22m	4' / 1.22m	4' / 1.22m	4' / 1.22m	4' / 1.22m
8' 2" / 2.5m 9'10" / 3.0m	8' 2" / 2.5m 9'10" / 3.0m	8' 2" / 2.5m 9'10" / 3.0m	8' 2" / 2.5m 9'10" / 3.0m	9' / 2.75m 10' / 3.05m	9'10" / 3.0m
8'2" - 24.20lbs 9'10" - 28.57lbs	8'2" - 24.20lbs 9'10" - 28.57lbs	8'2" - 24.20lbs 9'10" - 28.57lbs	8'2" - 24.20lbs 9'10" - 28.57lbs	9' - 21.05lbs 10' - 23.4lbs	9'10" - 17.6 lbs
10 years	varies	10 years	10 years	5 years	20 years

Tested

Class A

Exceeds 198 inch pounds

Exceeds 64 inch pounds

52 inch pounds
tested as wall assembly

Compliant

Compliant

Compliant

✓

✓

✓

✓

✓

✓

✓

✓

✓

✓

✓

✓






even more Altro

We aren't just a floor and wall manufacturer - we are a partner in your project. We aim to deliver all the resources necessary for an exceptional experience.

Even more Altro

Floor accessories	146
Altro Whiterock accessories	151
Altro Fortis Titanium 15 accessories	154
Altro Puraguard accessories	155
Additional support	156
Installer training (floors + walls)	158
Your education path (CEUs)	160

Flooring accessories

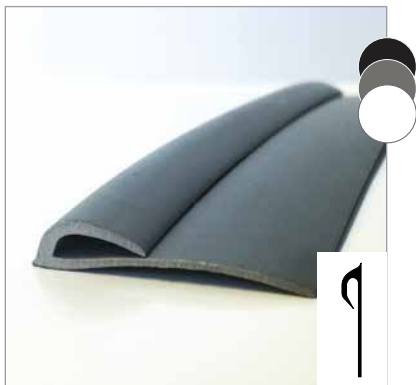

C7 Cap strip

C7BLK/DOVE/WHT

Pliable "J" shaped vinyl finishing cap used with flash cove sheet vinyl flooring. Available in Black, Gray and White.



20mm Cove stick

CF 20R


Used to create flash coving with resilient sheet flooring.



38mm Cove stick

CF 38R

Used to create flash coving with resilient sheet flooring.

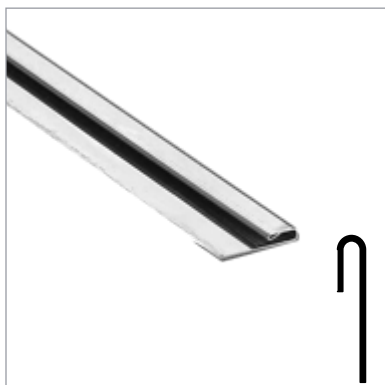

Stainless steel cap strip

SSCAP67

Stainless steel "J" shape finishing cap used with flash cove sheet vinyl flooring. Finish: 304 #4 stainless steel finish Gauge: 20



Stainless steel corner guard

3" and 5"


Protects external corners in high traffic areas.



C11 Cap tile strip

C11


Pliable vinyl finishing cap used at the top of quarry tile base or similar when flash coving over existing tile.

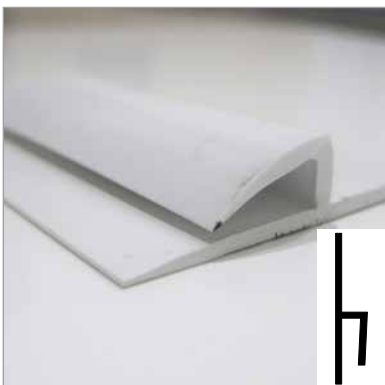

C8 Cap tile strip

C8


Rigid "h" shaped vinyl transition cap w/8mm shelf to be used between flash coved sheet flooring and wall tiles and/or wall cladding.

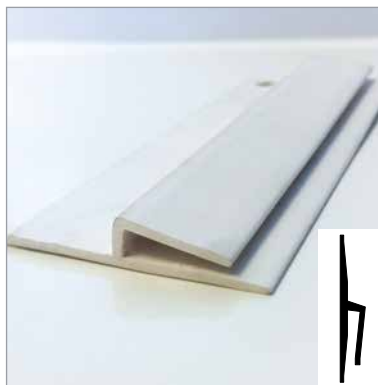

C4 Cap tile strip

C4Cap


Pliable "h" shaped vinyl transition cap w/4mm shelf to be used between flash coved sheet flooring and Altro wall panels.

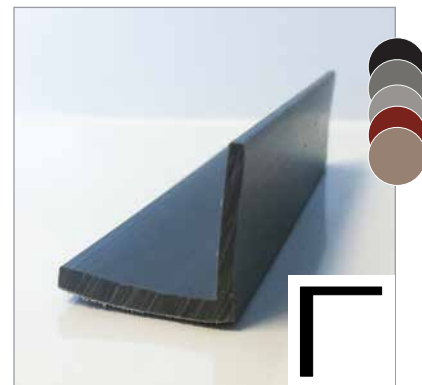

Gully angle

GA 25/35


Vinyl "L" shaped accessory to be heat welded to sheet vinyl and used with raised floor sinks that are higher than the finished floor level. Available in Black, Storm (Dark Gray), Fog (Light Gray), Russet (Quarry Red) and Tundra.

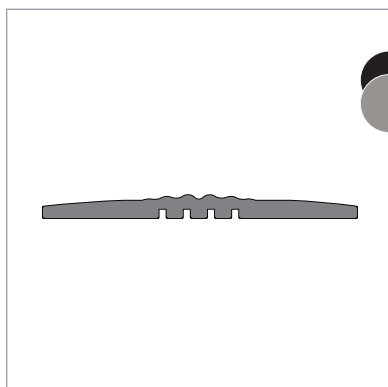

50mm Joint cover strip

QCJ50 (2" x 49')

Cover strip used when there is potential of control joints moving and showing through the finished floor.

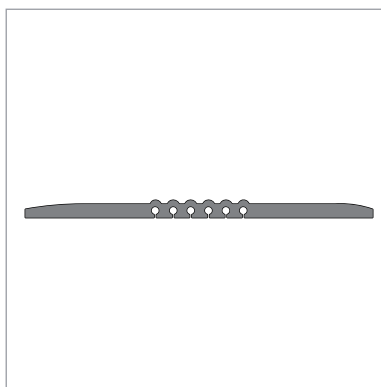

75mm Joint cover strip

QCJ75 (3" x 49')


Cover strip used when there is potential of control joints moving and showing through the finished floor.



Shower transition trim

ASF WETTRIM/* color code


Wheel chair accessible shower berm that prevents water egress from wet areas. Available in Cream(01), Light Gray(03), Medium Gray(04) and Light Brown (02).

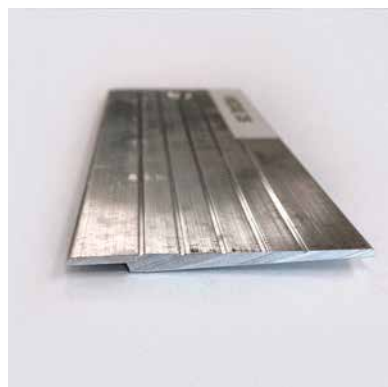

Visedge DS

VISEGE DS

Aluminum over the top reducer threshold to finish a raw edge of flooring where it needs to transition down to zero.

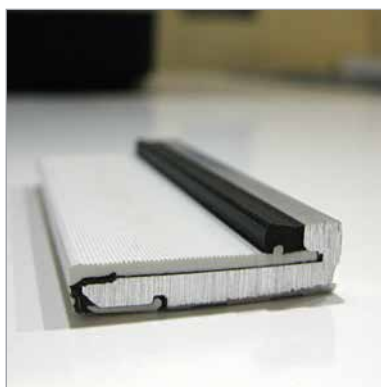

Visedge VR

VISEGE VR


Aluminum alloy retainer with a PVC insert to receive heat welded sheet vinyl that can abut a raised floor sink or quarry tile and patched down to zero.



Stainless steel heat deflector plate

SS DEFLECTOR PLATE


Protects vinyl flooring from high radiant heat. Ships with protective film covering. Size: 4'3

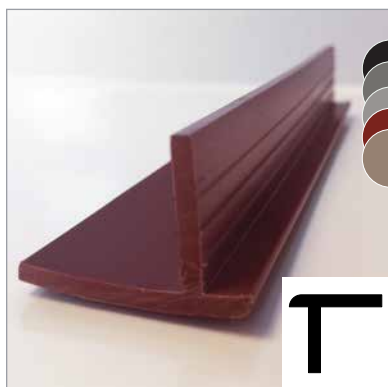

20mm Gulley edge with reducer

GE 25 RE


Vinyl "T" shaped accessory to be heat welded to sheet vinyl and used with floor sinks, square or rectangular trench drains. Available in Black, Storm (Dark Gray), Fog (Light Gray), Russet (Quarry Red) and Tundra.

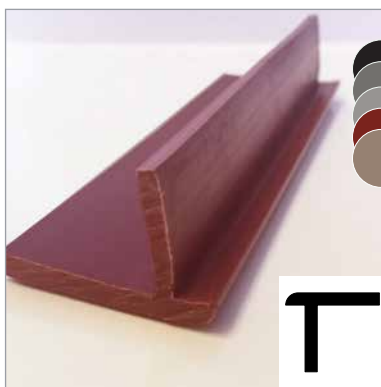

35mm Gulley edge with reducer

GE 35 RE

Vinyl "T" shaped accessory to be heat welded to sheet vinyl and used with floor sinks, square or rectangular trench drains. Available in Black, Storm (Dark Gray), Fog (Light Gray), Russet (Quarry Red) and Tundra.

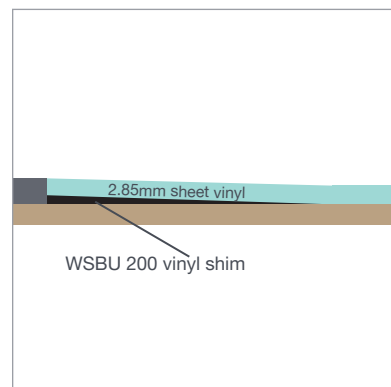

WSBU 200 vinyl shim

WSBU200

Vinyl shim use for transitioning smoothly between floors and walls or dissimilar flooring thickness when the transition is to be heat welded.

Flooring accessories continued



EcoFix+ adhesive

ECP1.0 (1 GAL) | ECP4.0 (4 GAL)

Transitional pressure sensitive adhesive (TPSA).



AltroFix ZERO adhesive

AL_ZERO2.0

1-part hybrid urethane adhesive.



AltroFix 30 adhesive

ALTROFIX30

Two-part polyurethane adhesive used for installing safety sheet vinyl in high traffic and/or wet areas.



AltroFix 31 adhesive

ALTROFIX31

Fast-acting two-part polyurethane adhesive used for installing safety sheet vinyl in small, wet environments.



AltroFix SD70 acrylic adhesive

ALTROFIXSD70

One-part acrylic adhesive used for installing Altro Walkway 20SD in static sensitive areas.



Adhesive for recycled rubber flooring

RFA4.0

One-part polyurethane adhesive used for installing Altro Ollero.



EcoFix 65 Spray adhesive

ECOFIX65

Non-toxic, water-based adhesive used for tile and/or plank flooring.



EcoFix 35 Spray adhesive

ECOFIX35

Non-toxic, water-based adhesive used for resilient sheet vinyl flooring in dry environments.



Altro QuickFix 3042 epoxy caulking

QUICKFIX3042

Fast-reacting, two-part self-mix epoxy caulking adhesive used for gully edge/angle installation and small repairs.



W165 Tape adhesion promoter

W165

Ensures tape adheres properly to substrate.



AltroMastic 100

AM/* add color code.

Caulking compound used for sealing joints where obstructions prevent the use of a heat welding gun.



Weldrod

WR* add color code.

PVC welding rod for use with Altro sheet vinyl flooring.



Adhesive-free tape

XL Tape 25

For adhering adhesive-free sheet vinyl in place.



Contact tape

1" CFS Capfix

4" and 6" CFS Covefix

Adheres cove stick and flashed coved flooring in place.



Altro Everlay underlayment

MEA1.2

For installing sheet vinyl over old or new surfaces with subfloor problems.



Altro Acoustic underlay 1101

AAU1101L36

For reducing the passage and transmission of sound.



scan me using your
smartphone's camera
application or a QR
reader application
to see our complete
accessories guide

Flooring accessories continued



Safety accent flooring

Safety Yellow

LRV 46

TFM2229 (2.2mm)

TFM2729 (2.7mm)

WR08 / AM200

This accent color is engineered in 2.2mm and 2.7mm thicknesses with resilience, durability, and safety in mind. Its vibrant yellow hue helps with the visually impaired and is best used for wayfinding or for accents and contrast.

Rest assured this product has impressive, slip resistance values. With a 1-in-a-million chance of suffering a slip with a PTV of ≥ 36 .

Installation is now easier than ever before – through our cutting service, this color can be supplied in convenient pre-cut format.

Typical applications

Wayfinding, general purpose, healthcare, senior living communities, education, retail, offices and recreational areas

Features + benefits

- Ideal for wayfinding for the visually impaired
- Achieves R10 slip resistance rating and PTV ≥ 36
- Easy to clean and maintain
- Enhanced, long-lasting durability
- Fifteen-year product warranty (Twelve-year for 2.2mm)
- Available in self-adhesive and pre-cut format for easier installation
- Emits low VOCs



LRV = Light reflectance value

Please keep LRVs in mind when selecting flooring for areas with dementia and Alzheimer's patients, seniors or individuals with poor vision.



Color matched weldrods (WR) and mastics (AM) are available. You'll find their product codes under product SKUs.



Setting up by SCS Global Services

6'7" x 65'5"

2m x 20m

Format


SHEET

Thickness

2.2mm | 0.87"

2.7mm | 0.11"

Altro Whiterock accessories

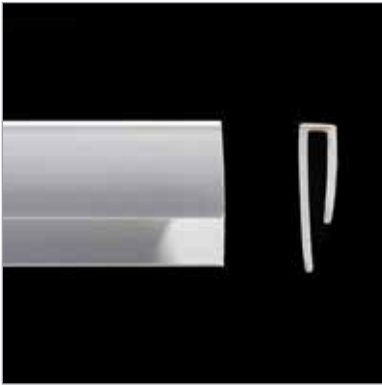


1-Part start and edge trim

8'2" G833/25/* color code
9'10" G833/30/* color code
Covers the edge of the sheet and gives a secure, finished edge.




1-Part joint strip

8'2" G831/25/* color code
9'10" G831/30/* color code
Vertical joint strip used to join adjacent sheets includes neoprene seal to make the joint watertight.

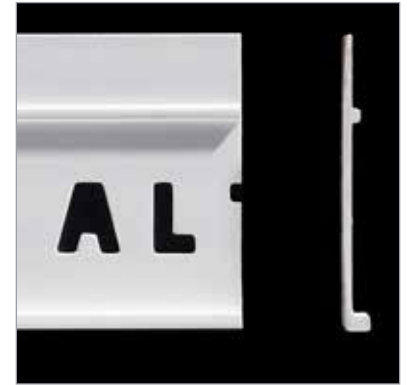

1-Part concealed transition strip

8'2" G835/25
Used as a leveling strip between two surfaces so that one can overlap the other.

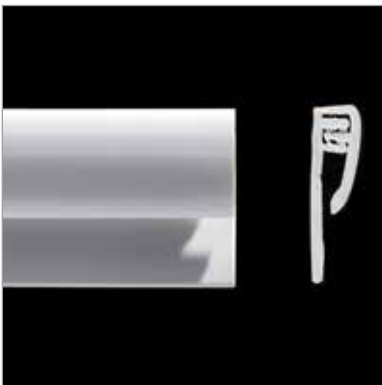


2-Part start and edge trim

8'2" A833/25/* color code
9'10" A833/30/* color code
2-part transition pieced used to finish a raw edge of Altro Whiterock i.e. top edge of wainscoting.




2-Part joint strip

8'2" A831/25/* color code
9'10" A831/30/* color code
Joins two wall panels together to create a smooth finish in areas where heat welding isn't viable.

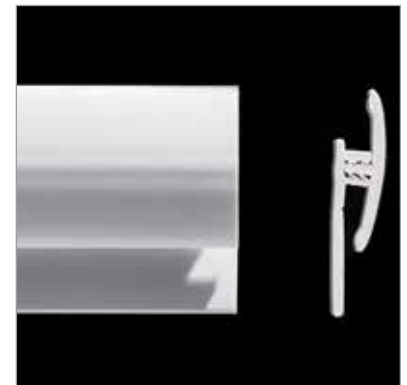


2-Part cut tile transition strip

A832/25/* color code
Used as a transition piece between Altro Whiterock and flashed covered flooring.

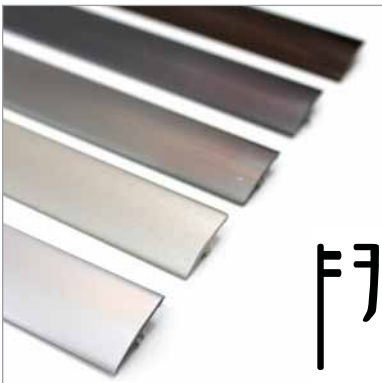


2-Part start and edge trim

9'10" A833/30/* color code
Metallic visual 2-part transition pieced used to finish a raw edge of Altro Whiterock wall designs i.e. top edge of wainscoting.

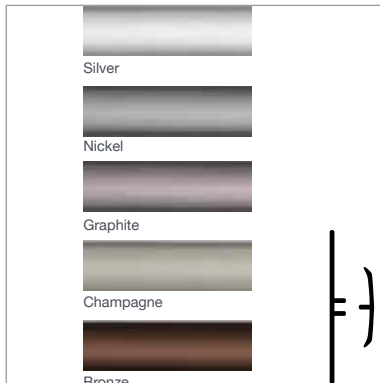

2-Part joint strip

9'10" A831/30/* color code
Metallic visual strip joins two Altro Whiterock wall designs panels to create a smooth finish in areas where heat welding isn't viable.

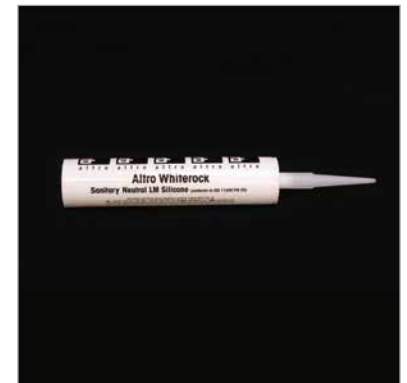

Sanitary sealant

White - A802
Clear - A803
Color - A805/* color code
For creating a hygienically-sealed edge.

Altro Whiterock accessories continued



AltroFix W39 2-part adhesive W39

For adhering Altro Whiterock on both porous and non-porous substrates, in wet and high humidity environments and when heat welding is specified.



W165 Tape adhesion promoter W1650.5 (½ GAL)

Ensures tape adheres properly to substrate.



AltroFix W157 acrylic adhesive W157

For adhering Altro Whiterock on porous substrates and dry applications only.



Double-sided foam tape

1" A815/116

2" A815/216

1/16" thick foam mounting tape used for installing Altro Whiterock when heat welding seams.



Double-sided foam tape

1" A815/132

2" A815/232

1/32" thick foam mounting tape used for installing Altro Whiterock when heat welding seams.



Double-sided butyl tape

A815/30


For installing Altro Whiterock panels while using joint strips.



Weldrod

WSR* add color code

PVC welding rod for use with Altro sheet vinyl wall cladding.

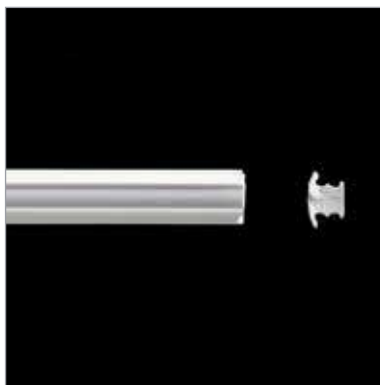


FlexiJoint strip

FJ01/3MH

FJ* add color code for coil


Unobtrusive, almost-invisible joints for installing Altro Whiterock panels. Available in white strips and custom coils.

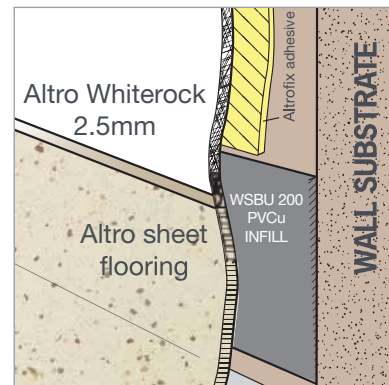

Heat weld backer

WSBU200


Vinyl shim backer for creating a solid and smooth transition between floors and walls when heat welding this seam.

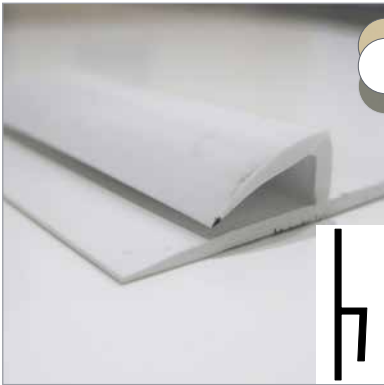

C8 Cap tile strip

C8


Rigid "h" shaped vinyl transition cap w/8mm shelf to be used between flash covered sheet flooring and Altro Whiterock

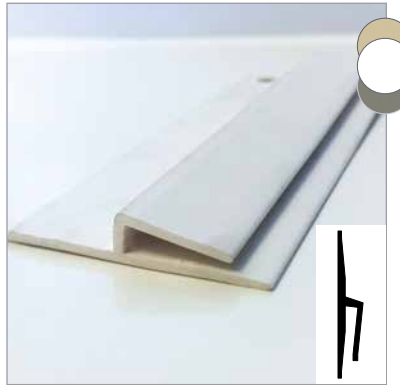

C4 Cap tile strip

C4CAP/* color code

Pliable "h" shaped vinyl transition cap w/4mm shelf to be used between flash covered sheet flooring and Altro Whiterock.

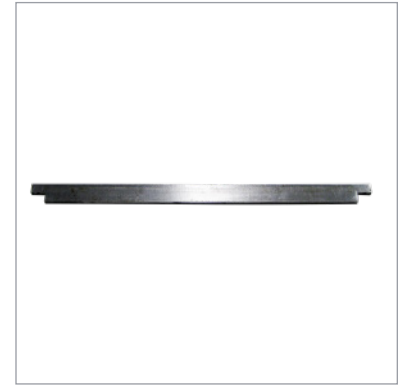

FlexiJoint steel spacers

FJS/3.4

Used for setting the gap between panels accurately when using Flexijoint strips.



Stainless steel corner protector

4' A861/12

8' A861/13

Protects external corners in high traffic areas.



Shower Recessed Shelf

A900

A factory formed hygienic insert that can be welded directly to panels, offering a water-tight, rust-proof shelf for your shower toiletries.

Altro Fortis Titanium 15 accessories



Color-matched sealant

Fills gap between abutting panels and corners. May also be used on perimeter
See SKUs on page 5




Altro W157 acrylic adhesive

Full spread, trowel application
W157



Altro W147 Spray adhesive

Spray application
W147

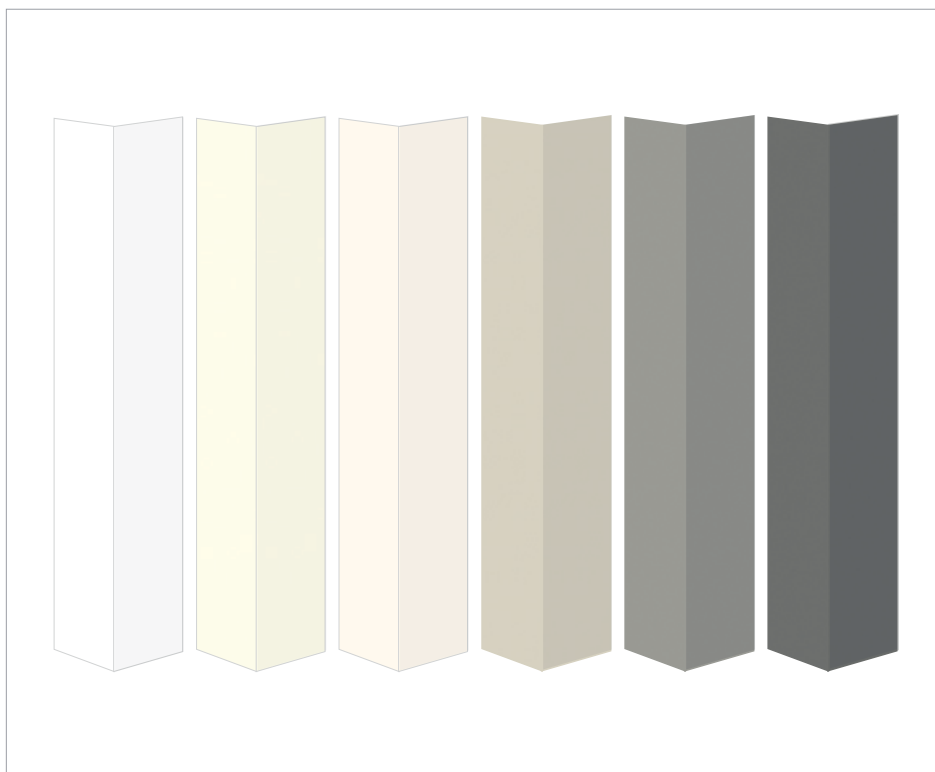

Prefabricated corners

External and internal options available.
6" x 6" x 48" or 6" x 6" x 118"
See SKU chart below.



48" corner protector - stainless steel (optional)

A861/12 3" x 3" x 48"

48" prefabricated corners	Internal	External
Candle	A526/12/05	A539/12/05
Ivory	A526/12/04	A539/12/04
Cotton	A526/12/06	A539/12/06
Latte	A526/12/03	A539/12/03
Smoke	A526/12/02	A539/12/02
Granite	A526/12/01	A539/12/01

118" prefabricated corners	Internal	External
Candle	A526/30/05	A539/30/05
Ivory	A526/30/04	A539/30/04
Cotton	A526/30/06	A539/30/06
Latte	A526/30/03	A539/30/03
Smoke	A526/30/02	A539/30/02
Granite	A526/30/01	A539/30/01

Altro Puraguard accessories



AltroFix W157 acrylic adhesive

W157

For adhering Altro Puraguard on porous substrates, in dry applications only.



AltroFix W39 2-part adhesive

W39

For adhering Altro Puraguard on both porous and non-porous substrates and in wet and high humidity.



Altro W147 Spray adhesive

W147

Non-toxic, water-based adhesive used for Altro Puraguard wall panels.



Sanitary sealant

White - A802

Clear - A803


Color - A805/* add color code
For creating a hygienically-sealed edge.



1-Part joint strip

G731/30/*

"H" shaped transition strip that joins two Altro Puraguard panels together. Available in Salt(white), Pepper(gray) and Barley(tan).



1-Part Altrotite gasket trim

A840/30/*

Trim piece used between two Altro Puraguard panels to join unobtrusively. Available in Salt(white), Pepper(gray) and Barley(tan).



1-Part start and edge trim

G733/30/*

"J" shaped piece used to finish off Altro Puraguard panel at top or sides (i.e. top of wainscoting). Available in Salt(white), Pepper(gray) and Barley(tan).




Stainless steel corner protector

4' A861/12

8' A861/13


Protects external corners in high traffic areas.



External corner cover

A839/30

"L" shaped piece used to finish off where the Altro Puraguard meets an external corner. Available in Salt(white), Pepper(gray) and Barley(tan).



Internal / external corner trim

A826/30

"F" shaped piece that can be used to finish off Altro Puraguard at internal and external corners. Available in Salt(white), Pepper(gray) and Barley(tan).



C8 Cap tile strip

C8

Rigid "h" shaped vinyl transition cap w/8mm shelf to be used between flash covered sheet flooring and Altro Puraguard.



C4 Cap tile strip

C4CAP/* color code

Pliable "h" shaped vinyl transition cap w/4mm shelf to be used between flash covered sheet flooring and Altro Puraguard.

Additional support



Samples

Samples are available 24 hours a day on [altro.com](https://www.altro.com) as well as materialbank.com




Literature

An abundance of literature from catalogs like this to sector brochures, product brochures and more on [altro.com](https://www.altro.com)



Color inspiration

Not everyone has an interior designer! If you are looking for color inspiration for your smaller project visit [altro.com](https://www.altro.com)

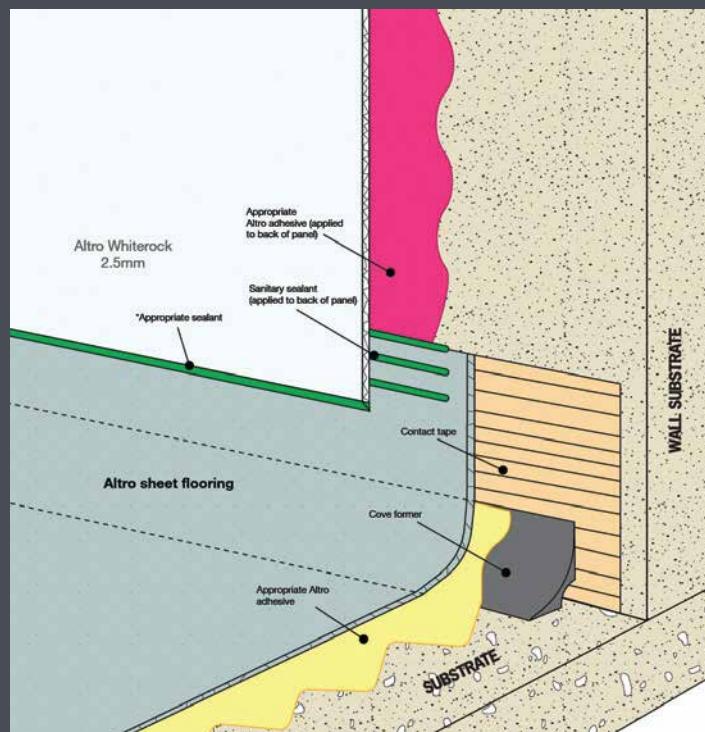

BIM, CAD and technical documents

Resources to make project specifications and installation as smooth as possible are available on [altro.com](https://www.altro.com)




Altro Insta-space

Visualize in real time how Altro products in a space by uploading a picture of your room into the app on **altro.com**



Installation photos

A large library of installation photography is available on **altropics.com** or navigate there from **altro.com**

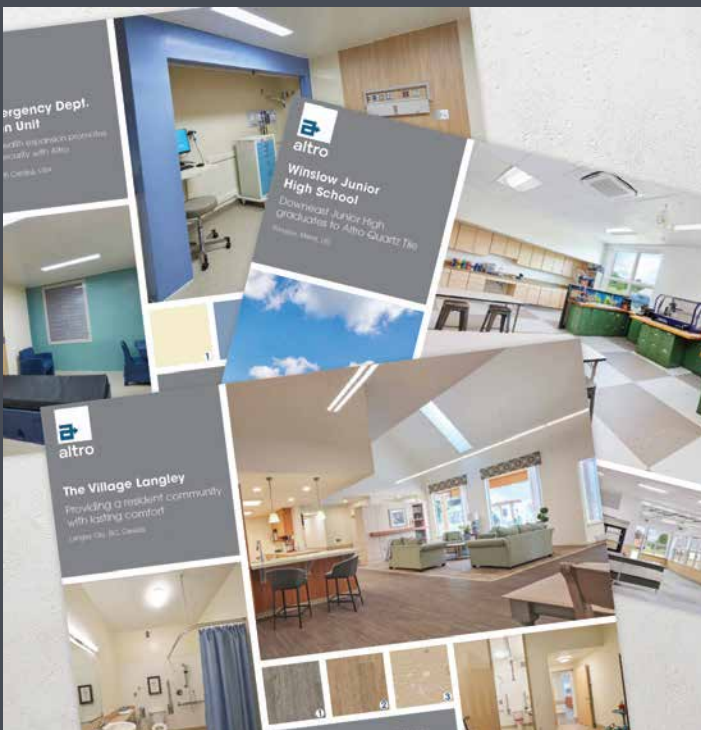

Case studies

References, quotes and images from real life customers are always updated on **altro.com**

Tel 800.377.5597 Downloads | Insta-space

altro Floors Walls Sectors Support Transport floors Sustainable

Warranties

Altro offer up to 20 years guarantee on our flooring, wall cladding and transport flooring products.
Register your Altro products online by completing the form below.

Altro warranty registration form

Date of installation*	
Project name*	Project address
Area type	Specifier address
Specifying Authority/Customer	Installer email
Installed by* (Contractor)	
Product*	Quantity* (sqm)
Send guarantee by post to	Send guarantee to these email addresses

Online warranty submittal

Submitting your product warranty is now easier than ever on **altro.com**

Becoming a recommended installer



The goal of the Altro training academy is to train and qualify a network of professional flooring and wall installers who wish to become part of a specialized group of recommended Altro installers and fitters. The academy is ideal for flooring installers, general contractors, and carpenters looking to learn how to install these specialized commercial products. Altro stands behind our installers and always recommends that customers use Altro trained installers.

Two training centers are located in the United States. They are located in Wilmington, Massachusetts and Santa Fe Springs, California. We also have a Canadian facility located in Mississauga, Ontario. Typical installation scenarios are integrated with best practices for a better, hands-on, learning experience.

Flooring curriculum

- Adhesive application
- Scoring
- Trimming
- Corners
- Heat-welding
- Flash-coving
- Integrated drains
- Best practices

Wall curriculum

- Adhesive application
- Surface preparation
- Wall fitting
- Grooving
- Joining
- Heat-welding
- Flexjoint
- Transition strips
- Thermoforming
- Best practices

USA clinic locations

- Wilmington, MA
- Santa Fe Springs, CA

CAN clinic locations

- Mississauga, Ontario



For more information please visit altro.com or navigate using the QR code shown. Registration and pre-qualification forms are also available through this link.

scan me using your
smartphone's camera
application or a QR
reader application.



Customize your education path with us



We work with architects, designers, contractors and end users in healthcare, education, food service and other sectors, and from safety to aesthetics, use our expertise to help them transform everyday spaces into thriving environments. Please take a look at the accredited courses, non-accredited presentations and technical demonstrations we deliver regularly. We are always happy to create a learning event for your unique needs and schedule.

Non-accredited courses and demonstrations

Products

- Safety flooring
- Slip-resistant flooring
- Adhesive-free flooring
- Smooth sheet flooring
- Smooth tile and planks
- Comfort flooring
- Recycled rubber floors
- Exterior flooring
- Wet environments
- Walls
- Digitally printed walls
- Tile-look walls

Sectors

- Senior living
- Healthcare
- Commercial kitchens
- Education
- Cleanrooms
- Hospitality

Demonstrations

- Adhesive-free
- Wet environments
- Altro Whiterock
- Altro Tegulis

Sign-up or inquire about a CEU, presentation or demonstration on altro.com or navigating with the QR code shown here.

scan me using your
smartphone's camera
application or a QR
reader application.



AIA/CES, IIDA/IDCEC approved CEU courses

Additional courses on next page

**Hygienic operating room design**

An informative seminar that examines the unique challenges and guidelines that must be addressed when designing operating rooms.

1 LU
1 HSW


AIA
CES
IIDA
IDCEC

**Designing for education**

An informative seminar that examines the unique challenges that must be addressed when designing interiors for both K-12 and higher education.

1 LU

AIA
CES
IIDA
IDCEC

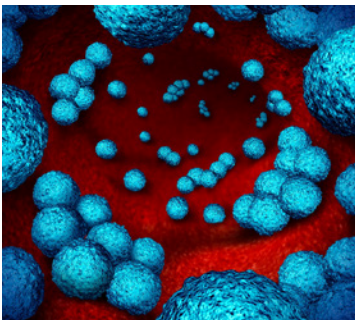**Preventing infection**

An informative seminar examining the dangers of Healthcare Acquired Infections (HAIs) like MRSA, VRE and ESBL and how they can be avoided by selecting proper flooring and wall cladding finishes.

1 LU
1 HSW

AIA
CES
IIDA
IDCEC

**Designing for an aging population**

An informative seminar examining the difficulties seniors face with everyday tasks and how designing interiors to meet those needs creates a safe and comfortable environment.

1 LU
1 HSW

AIA
CES
IIDA
IDCEC

**Designing for behavioral and mental health**

An informative seminar that provides an in-depth examination of the statistics surrounding behavioral and mental health (BMH) as well as facilitating treatment while promoting safety through successful BMH design.

1 LU
1 HSW

AIA
CES
IIDA
IDCEC


AIA/CES, IIDA/IDCEC approved CEU courses continued

Designing for underfoot comfort

An informative seminar that examines the correlation between flooring and its degree of underfoot comfort in relation to the development and prevention of musculoskeletal disorders in employees across various industries.

1 LU
1 HSW

AIA
CES
IIDA
IDCEC

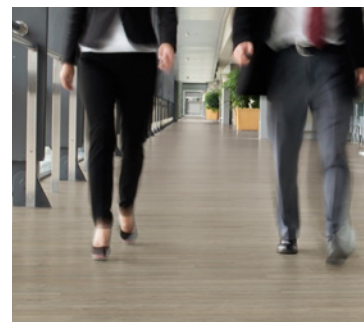

Safety by design

An informative seminar examining the dangers associated with slips and falls and the importance of choosing appropriate flooring.

1 LU
1 HSW
1 FCSI

AIA
CES
IIDA
IDCEC



Specifying dementia friendly finishes

An informative seminar focused on understanding the physical and cognitive changes in those suffering with dementia, how dementia affects design decisions and the importance of choosing appropriate finishes.

1 LU
1 HSW

AIA
CES
IIDA
IDCEC




Healthy building design

An informative seminar focused on promoting safety through linking the built environment to human health, as well as examining the impact of floor and wall surfaces on the wellbeing of employees.

1 LU
1 HSW

AIA
CES
IIDA
IDCEC

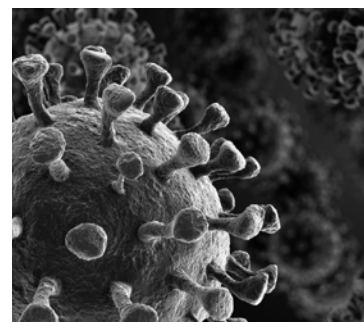

Designing for healthcare: wet environments

An informative seminar that provides a detailed overview of proper flooring, wall cladding and fixtures for wet environments in healthcare settings. Learn detailing and installation methods where safety is a primary focus.

1 LU
1 HSW

AIA
CES
IIDA
IDCEC





OMPANY,
nies Acts,
ay of April,

oint Stock

one pound each, numbered 998 to _____ is the Registered
above-named Company, subject to the Memorandum and Articles of
Association and Regulations of the said Company.
fully-paid Shares
inclusive, in the

Given
Company, this
Paul Butler



How much longer
can Altro Safety go
on performing at the
London Palladium

Designed for possibilities.
Made for people.

Safety Flooring
to take a beating



Featured color palette

The classic combination of warm neutrals and natural woodgrain showcased in the photo above. This color palette features the following Altro products (left to right)

- Altro Lavencia LVT - Vintage Walnut
- Altro Whiterock wall designs - Warm Woodgrain
- Altro Tegulis - Subway Tile in Standard White
- Altro Whiterock - Flint
- Altro Operetta - Iris
- Altro Orchestra - Flute
- Altro Serenade - Octave
- Altro Symphonia - Senna



scan to order this
free sample set

Follow us



ALTRO PRODUCT CATALOG

POWERED BY:

PREMIER

premier.partners

LG-118-J, EME Sector, DHA Phase 12
Multan Road, Lahore 53710 - Pakistan
+92 342 004 2042

📞 **USA** 800 377 5597

📞 **CANADA** 800 565 4658

✉️ support@altro.com

🌐 www.altro.com